

NETWORK
CONNECTION



Halitürk

Halitürk Gıda İç ve Dış Ticaret LTD. STİ.

LED Aydınlatma / LED Lighting YENİ / NEW

Ürün Kataloğu / Product Catalogue

INDEX

LED Panel Lights Page 08	LED Fixtures Wallwashers Page 17	Terra Modular Systems Page 18	LED Floodlights Page 20	LED High Bay Luminaires Page 24
LED Spots Page 26	Full Spectrum LED Grow Lights Page 27	LED Street Fixtures Page 28	High Power LED Wallwashers Page 30	LED Linear Luminaires Page 32
LED Canopy Luminaires Page 35	LED Wall Lamps Page 36	LED Luminaires Page 37	Garden Fixtures Page 39	Garden Fixtures Page 44
LED Rail Luminaires Page 46	RailSpots and Ornaments Page 51	LED Cimbals Downlights Page 54	Surface LED Wall Lamps Page 56	LED Fixtures Page 59
LED Spots Page 62	Controls Page 65	Timers and Other Products Page 65	LED Emergency Signs Page 66	Lanterns Page 67
Sensors Page 68	Wireless Remote Control Doorbells Page 68	LED Lamps Page 69	LED Capsule Lamps Page 71	Special LED Lamps Page 72
LED Tubes Page 73	LED Rustic Lamps Page 74	Decorative LED Pendants Page 76	Decorative LED Spot Fixtures Page 77	Decorative Spot Fixtures Page 79
Decorative Spot Fixtures Page 81	LED Strips, Bars and Drivers Page 86	Ornamental Lights Page 89	Decorative Pendants Page 90	Aspirators and Outlet Page 93

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
1201-001	Pg 95	6005-007	Pg 16	AA29-00140	Pg 71	AB58-00420	Pg 75	AD01-00530	Pg 26
1201-003	Pg 95	6005-008	Pg 16	AA29-00390	Pg 71	AB59-00420	Pg 75	AD30-01301	Pg 50
1201-016	Pg 95	6008-007	Pg 16	AA29-00393	Pg 71	AB60-00620	Pg 75	AD30-01600	Pg 49
1201-017	Pg 95	6401-017	Pg 50	AA29-00410	Pg 71	AB63-00320	Pg 75	AD30-01601	Pg 49
1201-019	Pg 95	6401-021	Pg 50	AA29-00413	Pg 71	AC01-00130	Pg 67	AD30-01700	Pg 49
1201-021	Pg 95	6401-023	Pg 50	AA29-00440	Pg 71	AC01-00330	Pg 67	AD30-01701	Pg 49
1201-022	Pg 95	6401-025	Pg 50	AA29-30340	Pg 71	AC01-00430	Pg 67	AD30-01900	Pg 49
1201-023	Pg 95	6604-001	Pg 45	AA29-30343	Pg 71	AC01-00530	Pg 67	AD30-01901	Pg 49
1201-024	Pg 95	6604-003	Pg 45	AA29-30440	Pg 71	AC02-00430	Pg 67	AD30-01910	Pg 49
1201-025	Pg 95	6604-006	Pg 45	AA29-30443	Pg 71	AC04-00134	Pg 67	AD30-01911	Pg 49
1201-026	Pg 95	6605-001	Pg 17	AA31-81420	Pg 72	AC04-00234	Pg 67	AD30-01930	Pg 49
1201-027	Pg 95	6605-002	Pg 17	AA32-31420	Pg 72	AC14-00253	Pg 66	AD30-01931	Pg 49
1201-028	Pg 95	6605-003	Pg 17	AA36-00410	Pg 74	AC14-00353	Pg 66	AD30-04000	Pg 48
1201-029	Pg 95	6801-001	Pg 17	AA36-00610	Pg 74	AC14-00453	Pg 66	AD30-04001	Pg 48
1201-030	Pg 95	6801-002	Pg 17	AA38-00620	Pg 74	AC14-00553	Pg 66	AD30-04010	Pg 48
1202-001	Pg 95	A05-95-005	Pg 87	AA52-00680	Pg 73	AC14-01000	Pg 66	AD30-04011	Pg 48
1202-003	Pg 95	A05-95-006	Pg 87	AA52-00681	Pg 73	AC14-10001	Pg 66	AD30-04030	Pg 48
1202-005	Pg 95	AA09-00510	Pg 69	AA52-00683	Pg 73	AC14-10002	Pg 66	AD30-04031	Pg 48
1202-007	Pg 95	AA09-00513	Pg 69	AA52-00684	Pg 73	AC14-10004	Pg 66	AD30-04500	Pg 48
1203-001	Pg 95	AA09-00610	Pg 69	AA52-00685	Pg 73	AC14-01003	Pg 66	AD30-04501	Pg 48
1203-002	Pg 95	AA09-00613	Pg 69	AA52-00686	Pg 73	AC14-10053	Pg 66	AD30-04510	Pg 48
1204-001	Pg 96	AA11-00510	Pg 69	AA52-01280	Pg 73	AC14-10153	Pg 66	AD30-04511	Pg 48
1204-002	Pg 96	AA11-00513	Pg 69	AA52-01281	Pg 73	AC14-10353	Pg 66	AD30-04530	Pg 48
1204-003	Pg 96	AA11-00520	Pg 69	AA52-01283	Pg 73	AC14-10453	Pg 66	AD30-04531	Pg 48
1204-004	Pg 96	AA11-00523	Pg 69	AA52-01284	Pg 73	AC14-10653	Pg 66	AD30-04800	Pg 47
1204-005	Pg 9	AA13-00920	Pg 69	AA52-01285	Pg 73	AC14-10753	Pg 66	AD30-04801	Pg 47
1206-001	Pg 51	AA13-00921	Pg 69	AA52-01286	Pg 73	AC14-10853	Pg 66	AD30-04810	Pg 47
1206-002	Pg 51	AA13-00923	Pg 69	AA52-01580	Pg 73	AC14-10953	Pg 66	AD30-04811	Pg 47
1206-003	Pg 51	AA13-01220	Pg 69	AA52-01581	Pg 73	AC14-11052	Pg 66	AD30-04830	Pg 47
1208-001	Pg 95	AA13-01221	Pg 69	AA52-01583	Pg 73	AC14-11053	Pg 66	AD30-04831	Pg 47
1602-017	Pg 80	AA13-01223	Pg 69	AB01-02420	Pg 76	AC14-11153	Pg 66	AD30-11000	Pg 50
1602-023	Pg 80	AA13-01520	Pg 69	AB01-02423	Pg 76	AC14-11253	Pg 66	AD30-11010	Pg 50
1602-051	Pg 80	AA13-01521	Pg 69	AB01-12420	Pg 76	AC14-11353	Pg 66	AD30-11030	Pg 50
1880-003	Pg 51	AA13-01523	Pg 69	AB01-12423	Pg 76	AC14-11453	Pg 66	AD30-11001	Pg 50
1880-002	Pg 51	AA13-02020	Pg 70	AB01-13220	Pg 76	AC14-11553	Pg 66	AD30-11011	Pg 50
1880-004	Pg 51	AA13-02023	Pg 70	AB01-13223	Pg 76	AC14-11653	Pg 66	AD30-11031	Pg 50
1880-005	Pg 51	AA13-03020	Pg 70	AB01-42420	Pg 76	AC14-11703	Pg 66	AD30-11900	Pg 49
1880-006	Pg 51	AA13-03023	Pg 70	AB01-43220	Pg 76	AC14-11704	Pg 66	AD30-11901	Pg 49
1880-007	Pg 51	AA13-04020	Pg 70	AB01-43223	Pg 76	AC14-11705	Pg 66	AD30-11910	Pg 49
5003-012	Pg 96	AA13-04023	Pg 70	AB01-52420	Pg 76	AC14-11753	Pg 66	AD30-11911	Pg 49
5003-016	Pg 96	AA13-05020	Pg 70	AB01-52423	Pg 76	AC15-00609	Pg 66	AD30-11930	Pg 49
5003-023	Pg 96	AA13-05023	Pg 70	AB01-53220	Pg 76	AC15-61312	Pg 66	AD30-11931	Pg 49
5004-013	Pg 96	AA13-06020	Pg 70	AB01-53223	Pg 76	AC15-61609	Pg 66	AD30-14500	Pg 48
5004-015	Pg 96	AA13-06023	Pg 70	AB01-62420	Pg 76	AC15-62609	Pg 66	AD30-14501	Pg 48
5005-001	Pg 16	AA14-01020	Pg 70	AB01-63220	Pg 76	AC15-63312	Pg 66	AD30-14510	Pg 48
5006-005	Pg 26	AA14-01023	Pg 70	AB01-63223	Pg 76	AC16-00100	Pg 59	AD30-14511	Pg 48
5280-001	Pg 86	AA14-30530	Pg 70	AB46-00420	Pg 74	AC16-00130	Pg 59	AD30-14530	Pg 48
5280-002	Pg 86	AA14-50720	Pg 70	AB46-00620	Pg 74	AC16-00131	Pg 59	AD30-14531	Pg 48
5280-003	Pg 86	AA14-50723	Pg 70	AB47-00420	Pg 74	AC16-00134	Pg 59	AD30-14600	Pg 46
5280-004	Pg 86	AA24-00550	Pg 72	AB48-00420	Pg 74	AC16-00135	Pg 59	AD30-14601	Pg 46
5280-005	Pg 86	AA24-00553	Pg 72	AB50-00420	Pg 74	AC16-00136	Pg 59	AD30-14610	Pg 46
5601-006	Pg 96	AA24-00560	Pg 72	AB53-00420	Pg 74	AC16-00137	Pg 59	AD30-14611	Pg 46
5601-007	Pg 96	AA24-00563	Pg 72	AB55-00420	Pg 74	AC16-00138	Pg 59	AD30-14630	Pg 46
5602-012	Pg 23	AA24-00750	Pg 72	AB56-00420	Pg 75	AD01-00500	Pg 26	AD30-14631	Pg 46
6005-005	Pg 16	AA24-00753	Pg 72	AB57-00420	Pg 75	AD01-00510	Pg 26	AD30-14700	Pg 47

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
AD30-14701	Pg 47	AG40-01102	Pg 42	AH02-01303	Pg 78	AH04-01247	Pg 84	AH06-00403	Pg 64
AD30-14710	Pg 47	AG40-01202	Pg 42	AH02-01333	Pg 78	AH04-01257	Pg 84	AH06-00433	Pg 64
AD30-14711	Pg 47	AG40-01302	Pg 42	AH02-01433	Pg 78	AH04-01266	Pg 84	AH06-00500	Pg 62
AD30-14730	Pg 47	AG40-01402	Pg 41	AH02-01533	Pg 78	AH04-01276	Pg 85	AH06-00530	Pg 62
AD30-14731	Pg 47	AG40-01502	Pg 41	AH02-01603	Pg 77	AH04-01280	Pg 85	AH06-00730	Pg 64
AD30-14800	Pg 48	AG43-00102	Pg 41	AH02-01733	Pg 78	AH04-01285	Pg 85	AH06-00850	Pg 26
AD30-14801	Pg 48	AG43-00302	Pg 41	AH03-02034	Pg 80	AH04-01286	Pg 85	AH06-00906	Pg 64
AD30-14810	Pg 48	AG43-00502	Pg 41	AH03-04010	Pg 18	AH04-01296	Pg 85	AH06-00936	Pg 64
AD30-14811	Pg 48	AG43-01002	Pg 42	AH03-04011	Pg 19	AH04-01306	Pg 85	AH06-01004	Pg 64
AD30-14830	Pg 48	AG43-01802	Pg 40	AH03-04020	Pg 18	AH04-01316	Pg 85	AH06-01034	Pg 64
AD30-14831	Pg 48	AG43-02002	Pg 40	AH03-04021	Pg 19	AH04-01326	Pg 85	AH06-01200	Pg 64
AD30-24600	Pg 46	AG43-02102	Pg 40	AH03-04030	Pg 18	AH04-01336	Pg 85	AH06-01230	Pg 64
AD30-24601	Pg 46	AG43-02302	Pg 40	AH03-04040	Pg 18	AH04-01345	Pg 84	AH07-00100	Pg 63
AD30-24610	Pg 46	AG43-02702	Pg 39	AH03-04041	Pg 19	AH04-01346	Pg 84	AH07-00130	Pg 63
AD30-24611	Pg 46	AG43-02902	Pg 39	AH03-04050	Pg 18	AH04-01347	Pg 84	AH07-00604	Pg 17
AD30-24630	Pg 46	AG43-03002	Pg 39	AH03-04051	Pg 19	AH04-10905	Pg 16	AH07-00634	Pg 17
AD30-24631	Pg 46	AG43-03202	Pg 39	AH03-04060	Pg 18	AH04-10906	Pg 16	AH07-00664	Pg 17
AD36-00100	Pg 55	AH01-01053	Pg 80	AH03-04070	Pg 18	AH04-10935	Pg 16	AH07-00704	Pg 17
AD36-00130	Pg 55	AH01-01065	Pg 80	AH03-04071	Pg 19	AH04-10936	Pg 16	AH07-00734	Pg 17
AD36-00300	Pg 55	AH01-01076	Pg 80	AH03-04080	Pg 18	AH04-11205	Pg 16	AH07-00764	Pg 17
AD36-00310	Pg 55	AH01-01085	Pg 80	AH03-04081	Pg 19	AH04-11206	Pg 16	AH07-00804	Pg 17
AD36-00330	Pg 55	AH01-01113	Pg 80	AH04-01016	Pg 81	AH04-11235	Pg 16	AH07-00834	Pg 17
AD36-00400	Pg 55	AH01-01123	Pg 80	AH04-01026	Pg 81	AH04-11236	Pg 16	AH07-00864	Pg 17
AD36-00410	Pg 55	AH01-02024	Pg 80	AH04-01037	Pg 81	AH05-00204	Pg 63	AH07-00904	Pg 17
AD36-00430	Pg 55	AH01-02044	Pg 79	AH04-01047	Pg 81	AH05-00403	Pg 63	AH07-00934	Pg 17
AD36-00600	Pg 54	AH01-02046	Pg 79	AH04-01051	Pg 82	AH05-00503	Pg 63	AH07-00964	Pg 17
AD36-00610	Pg 54	AH01-02054	Pg 79	AH04-01066	Pg 82	AH05-00533	Pg 63	AH07-01004	Pg 17
AD36-00630	Pg 54	AH01-02056	Pg 79	AH04-01076	Pg 82	AH05-00603	Pg 63	AH07-01034	Pg 17
AD36-01300	Pg 54	AH01-02076	Pg 79	AH04-01086	Pg 82	AH05-00703	Pg 63	AH07-01064	Pg 17
AD36-01310	Pg 54	AH01-02084	Pg 79	AH04-01096	Pg 82	AH05-00803	Pg 64	AH07-01104	Pg 17
AD36-01330	Pg 54	AH01-02094	Pg 79	AH04-01106	Pg 82	AH05-00833	Pg 64	AH07-01134	Pg 17
AD36-01400	Pg 55	AH01-02096	Pg 79	AH04-01114	Pg 82	AH05-00843	Pg 64	AH07-01164	Pg 17
AD36-01410	Pg 55	AH01-02104	Pg 79	AH04-01115	Pg 82	AH05-00853	Pg 64	AH07-01204	Pg 62
AD36-01430	Pg 55	AH01-02113	Pg 79	AH04-01116	Pg 82	AH05-00863	Pg 64	AH07-01234	Pg 62
AD90-00020	Pg 51	AH01-02123	Pg 79	AH04-01117	Pg 82	AH06-00001	Pg 19	AH07-01304	Pg 63
AD90-00021	Pg 51	AH01-02133	Pg 79	AH04-01126	Pg 83	AH06-00011	Pg 19	AH07-01334	Pg 63
AD90-00023	Pg 51	AH01-04016	Pg 81	AH04-01135	Pg 83	AH06-00031	Pg 19	AH07-01344	Pg 63
AG31-00104	Pg 96	AH01-04046	Pg 81	AH04-01136	Pg 83	AH06-00100	Pg 62	AH07-01354	Pg 63
AG31-00122	Pg 45	AH01-04056	Pg 81	AH04-01137	Pg 83	AH06-00101	Pg 62	AH07-01364	Pg 63
AG31-00132	Pg 45	AH01-04066	Pg 81	AH04-01146	Pg 83	AH06-00110	Pg 62	AH07-01400	Pg 56
AG36-00002	Pg 44	AH01-04076	Pg 81	AH04-01156	Pg 83	AH06-00111	Pg 62	AH07-01403	Pg 63
AG36-00012	Pg 44	AH01-04086	Pg 81	AH04-01160	Pg 83	AH06-00130	Pg 62	AH07-01500	Pg 64
AG36-00032	Pg 44	AH01-04096	Pg 81	AH04-01161	Pg 83	AH06-00131	Pg 62	AH07-01600	Pg 64
AG36-00042	Pg 44	AH01-04106	Pg 81	AH04-01165	Pg 83	AH06-00204	Pg 62	AH07-01700	Pg 62
AG36-00062	Pg 44	AH02-00133	Pg 77	AH04-01166	Pg 83	AH06-00234	Pg 62	AH07-01701	Pg 62
AG39-00101	Pg 60	AH02-00206	Pg 77	AH04-01177	Pg 83	AH06-00300	Pg 62	AH07-01710	Pg 62
AG39-00201	Pg 60	AH02-00233	Pg 77	AH04-01179	Pg 83	AH06-00301	Pg 62	AH07-01711	Pg 62
AG40-00102	Pg 43	AH02-00303	Pg 78	AH04-01186	Pg 84	AH06-00304	Pg 62	AH07-01730	Pg 62
AG40-00302	Pg 43	AH02-00503	Pg 78	AH04-01196	Pg 84	AH06-00310	Pg 62	AH07-01731	Pg 62
AG40-00502	Pg 43	AH02-00533	Pg 78	AH04-01206	Pg 84	AH06-00311	Pg 62	AH07-03000	Pg 56
AG40-00602	Pg 43	AH02-00666	Pg 77	AH04-01216	Pg 82	AH06-00330	Pg 62	AH07-03001	Pg 56
AG40-00702	Pg 43	AH02-00933	Pg 77	AH04-01227	Pg 82	AH06-00331	Pg 62	AH07-03100	Pg 56
AG40-00802	Pg 43	AH02-01006	Pg 77	AH04-01229	Pg 84	AH06-00334	Pg 62	AH07-03200	Pg 56
AG40-00902	Pg 42	AH02-01133	Pg 77	AH04-01235	Pg 84	AH06-00354	Pg 62	AH07-03201	Pg 56
AG40-01002	Pg 42	AH02-01233	Pg 78	AH04-01236	Pg 84	AH06-00364	Pg 62	AH07-03300	Pg 56

INDEX

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
AH07-03301	Pg 56	AH15-09611	Pg 91	AN20-01203	Pg 38	AP03-01830	Pg 15	AP17-46630	Pg 10
AH07-03400	Pg 56	AH15-09671	Pg 91	AN20-01233	Pg 38	AP03-01831	Pg 15	AP20-26600	Pg 11
AH07-03401	Pg 56	AH15-10311	Pg 91	AP01-00300	Pg 12	AP03-02400	Pg 15	AP20-26610	Pg 11
AH07-04001	Pg 58	AH15-10371	Pg 91	AP01-00301	Pg 13	AP03-02401	Pg 15	AP20-26630	Pg 11
AH07-04101	Pg 58	AH15-10411	Pg 92	AP01-00310	Pg 12	AP03-02410	Pg 15	AP20-46600	Pg 11
AH07-04201	Pg 58	AH15-10471	Pg 92	AP01-00311	Pg 13	AP03-02411	Pg 15	AP20-46610	Pg 11
AH07-04301	Pg 57	AH15-11111	Pg 92	AP01-00330	Pg 12	AP03-02430	Pg 15	AP20-46630	Pg 11
AH07-04401	Pg 57	AH15-11171	Pg 92	AP01-00331	Pg 13	AP03-02431	Pg 15	AP21-26600	Pg 11
AH07-04501	Pg 57	AH15-12111	Pg 92	AP01-00600	Pg 12	AP04-01200	Pg 14	AP21-26610	Pg 11
AH07-04601	Pg 57	AH15-12171	Pg 92	AP01-00601	Pg 13	AP04-01201	Pg 14	AP21-26630	Pg 11
AH07-04701	Pg 57	AH15-13211	Pg 92	AP01-00610	Pg 12	AP04-01210	Pg 14	AP21-46600	Pg 11
AH07-04801	Pg 56	AH15-13271	Pg 92	AP01-00611	Pg 13	AP04-01211	Pg 14	AP21-46610	Pg 11
AH10-00104	Pg 58	AH15-14100	Pg 92	AP01-00630	Pg 12	AP04-01230	Pg 14	AP21-46630	Pg 11
AH10-00105	Pg 58	AH15-14111	Pg 92	AP01-00631	Pg 13	AP04-01231	Pg 14	AP30-31200	Pg 16
AH10-00107	Pg 58	AH15-14171	Pg 92	AP01-00900	Pg 12	AP04-01800	Pg 14	AP30-31800	Pg 16
AH10-00110	Pg 58	AH16-00121	Pg 92	AP01-00901	Pg 13	AP04-01801	Pg 14	AP30-31830	Pg 16
AH10-00304	Pg 58	AH16-00221	Pg 92	AP01-00910	Pg 12	AP04-01810	Pg 14	AP32-31200	Pg 16
AH10-00305	Pg 58	AH16-00521	Pg 92	AP01-00911	Pg 13	AP04-01811	Pg 14	AP32-31800	Pg 16
AH10-00307	Pg 58	AH16-00721	Pg 92	AP01-00930	Pg 12	AP04-01830	Pg 14	AS01-00103	Pg 86
AH10-00310	Pg 58	AH16-00821	Pg 92	AP01-00931	Pg 13	AP04-01831	Pg 14	AS01-00104	Pg 86
AH11-00204	Pg 58	AH16-01021	Pg 92	AP01-01200	Pg 12	AP04-02400	Pg 14	AS01-00105	Pg 86
AH11-00234	Pg 58	AL01-00601	Pg 34	AP01-01201	Pg 13	AP04-02401	Pg 14	AS01-00200	Pg 86
AH15-01200	Pg 90	AL01-00611	Pg 34	AP01-01210	Pg 12	AP04-02410	Pg 14	AS01-00300	Pg 86
AH15-01211	Pg 90	AL01-00631	Pg 34	AP01-01211	Pg 13	AP04-02411	Pg 14	AS01-00301	Pg 86
AH15-01271	Pg 90	AL01-00901	Pg 34	AP01-01230	Pg 12	AP04-02430	Pg 14	AS01-00303	Pg 86
AH15-02211	Pg 90	AL01-00911	Pg 34	AP01-01231	Pg 13	AP04-02431	Pg 14	AS01-00304	Pg 86
AH15-02271	Pg 90	AL01-00931	Pg 34	AP01-01500	Pg 12	AP04-03300	Pg 14	AS01-00305	Pg 86
AH15-02300	Pg 90	AL01-01201	Pg 34	AP01-01501	Pg 13	AP04-03301	Pg 14	AS01-00306	Pg 86
AH15-02311	Pg 90	AL01-01211	Pg 34	AP01-01510	Pg 12	AP04-03310	Pg 14	AS01-00309	Pg 86
AH15-02371	Pg 90	AL01-01231	Pg 34	AP01-01511	Pg 13	AP04-03311	Pg 14	AS01-00423	Pg 86
AH15-02400	Pg 90	AL01-10601	Pg 34	AP01-01530	Pg 12	AP04-03330	Pg 14	AS01-00453	Pg 86
AH15-02411	Pg 90	AL01-10611	Pg 34	AP01-01531	Pg 13	AP04-03331	Pg 14	AS01-00500	Pg 87
AH15-02471	Pg 90	AL01-10631	Pg 34	AP01-01534	Pg 12	AP14-30830	Pg 16	AS01-00503	Pg 87
AH15-03311	Pg 90	AL01-10901	Pg 34	AP01-01800	Pg 12	AP14-31230	Pg 16	AS01-00504	Pg 87
AH15-03371	Pg 90	AL01-10911	Pg 34	AP01-01801	Pg 13	AP14-31600	Pg 16	AS01-00505	Pg 87
AH15-04211	Pg 90	AL01-10931	Pg 34	AP01-01810	Pg 12	AP14-31630	Pg 16	AS01-00506	Pg 87
AH15-04271	Pg 90	AL01-11201	Pg 34	AP01-01811	Pg 13	AP16-23300	Pg 08	AS01-00508	Pg 87
AH15-04411	Pg 90	AL01-11211	Pg 34	AP01-01830	Pg 12	AP16-23310	Pg 08	AS01-00700	Pg 86
AH15-04471	Pg 90	AL01-11231	Pg 34	AP01-01831	Pg 13	AP16-23330	Pg 08	AS01-00703	Pg 86
AH15-05311	Pg 90	AL01-90001	Pg 34	AP01-01834	Pg 12	AP16-33600	Pg 09	AS03-00500	Pg 87
AH15-05371	Pg 90	AL01-90002	Pg 34	AP01-02000	Pg 12	AP16-33610	Pg 09	AS03-00503	Pg 87
AH15-06311	Pg 91	AN10-00400	Pg 37	AP01-02001	Pg 13	AP16-33630	Pg 09	AS03-00504	Pg 87
AH15-06371	Pg 91	AN10-00430	Pg 37	AP01-02010	Pg 12	AP16-43100	Pg 09	AS03-00505	Pg 87
AH15-07411	Pg 91	AN10-00700	Pg 37	AP01-02011	Pg 13	AP16-43110	Pg 09	AS03-00506	Pg 87
AH15-07471	Pg 91	AN10-00730	Pg 37	AP01-02030	Pg 12	AP16-43130	Pg 09	AS03-00508	Pg 87
AH15-08311	Pg 91	AN10-01100	Pg 37	AP01-02031	Pg 13	AP16-46600	Pg 08	AS03-00509	Pg 87
AH15-08371	Pg 91	AN10-01130	Pg 37	AP03-01200	Pg 15	AP16-46610	Pg 08	AS04-00200	Pg 87
AH15-08411	Pg 91	AN10-01400	Pg 37	AP03-01201	Pg 15	AP16-46630	Pg 08	AS04-00203	Pg 87
AH15-08471	Pg 91	AN10-01430	Pg 37	AP03-01210	Pg 15	AP16-56600	Pg 08	AS04-00204	Pg 87
AH15-09300	Pg 91	AN10-21430	Pg 37	AP03-01211	Pg 15	AP16-56610	Pg 08	AS04-00205	Pg 87
AH15-09311	Pg 91	AN18-00603	Pg 38	AP03-01230	Pg 15	AP16-56630	Pg 08	AS04-00206	Pg 87
AH15-09371	Pg 91	AN18-00633	Pg 38	AP03-01231	Pg 15	AP17-33300	Pg 10	AS04-00300	Pg 87
AH15-09400	Pg 91	AN18-01203	Pg 38	AP03-01800	Pg 15	AP17-33310	Pg 10	AS04-00303	Pg 87
AH15-09411	Pg 91	AN18-01233	Pg 38	AP03-01801	Pg 15	AP17-33330	Pg 10	AS04-00304	Pg 87
AH15-09471	Pg 91	AN20-00603	Pg 38	AP03-01810	Pg 15	AP17-46600	Pg 10	AS04-00305	Pg 87
AH15-09600	Pg 91	AN20-00633	Pg 38	AP03-01811	Pg 15	AP17-46610	Pg 10	AS04-00306	Pg 87


Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
AS04-00400	Pg 87	AT10-00830	Pg 59	AT20-03683	Pg 31	AT61-09132	Pg 22	AY40-00221	Pg 52
AS04-00403	Pg 87	AT10-01200	Pg 59	AT20-03693	Pg 31	AT61-09402	Pg 22	AY40-00223	Pg 52
AS05-00100	Pg 86	AT10-01230	Pg 59	AT21-01800	Pg 27	AT61-09432	Pg 22	AY40-00230	Pg 52
AS05-00101	Pg 86	AT10-01800	Pg 59	AT21-03600	Pg 27	AT61-09602	Pg 22	AY40-00231	Pg 52
AS05-00103	Pg 86	AT10-01830	Pg 59	AT25-00301	Pg 45	AT61-09632	Pg 22	AY40-00233	Pg 52
AS90-00100	Pg 89	AT10-11500	Pg 61	AT25-00331	Pg 45	AT61-09802	Pg 23	AY40-00240	Pg 52
AS90-00103	Pg 89	AT10-21500	Pg 61	AT25-00351	Pg 45	AT61-09832	Pg 23	AY40-00241	Pg 52
AS90-00104	Pg 89	AT10-21801	Pg 60	AT25-00381	Pg 45	AT61-22032	Pg 23	AY40-00243	Pg 52
AS90-00105	Pg 89	AT10-31831	Pg 60	AT38-06000	Pg 35	AT61-23032	Pg 23	AY40-00250	Pg 52
AS90-00106	Pg 89	AT10-41801	Pg 60	AT38-06010	Pg 35	AT61-25032	Pg 23	AY40-00251	Pg 52
AS90-00109	Pg 89	AT10-51831	Pg 61	AT38-06030	Pg 35	AT61-45032	Pg 23	AY40-00253	Pg 52
AS90-00200	Pg 89	AT11-00800	Pg 59	AT38-07500	Pg 35	AY02-00250	Pg 88	AY40-00260	Pg 52
AS90-00203	Pg 89	AT11-00830	Pg 59	AT38-07510	Pg 35	AY02-00600	Pg 88	AY40-00261	Pg 52
AS90-00206	Pg 89	AT11-01200	Pg 59	AT38-07530	Pg 35	AY02-01000	Pg 88	AY40-00263	Pg 52
AS90-00300	Pg 89	AT11-01230	Pg 59	AT38-09000	Pg 35	AY02-01500	Pg 88	AY40-02020	Pg 53
AS90-00303	Pg 89	AT11-11800	Pg 61	AT38-09010	Pg 35	AY02-02000	Pg 88	AY40-02021	Pg 53
AS90-00304	Pg 89	AT11-11830	Pg 61	AT38-09030	Pg 35	AY02-02500	Pg 88	AY40-02023	Pg 53
AS90-00306	Pg 89	AT11-31100	Pg 61	AT41-05000	Pg 28	AY02-03600	Pg 88	AY40-02030	Pg 53
AS90-00400	Pg 89	AT20-00603	Pg 30	AT41-05010	Pg 28	AY02-05000	Pg 88	AY40-02031	Pg 53
AS90-00403	Pg 89	AT20-00633	Pg 30	AT41-05030	Pg 28	AY25-00110	Pg 65	AY40-02033	Pg 53
AS90-00404	Pg 89	AT20-00643	Pg 30	AT41-08000	Pg 28	AY26-00010	Pg 65	AY40-02100	Pg 53
AS90-00405	Pg 89	AT20-00653	Pg 30	AT41-08010	Pg 28	AY26-00020	Pg 65	AY40-02101	Pg 53
AS90-00406	Pg 89	AT20-00663	Pg 30	AT41-08030	Pg 28	AY30-00110	Pg 65	AY40-02103	Pg 53
AS90-00500	Pg 89	AT20-00673	Pg 30	AT41-09100	Pg 29	AY30-00120	Pg 65	AY40-02110	Pg 53
AS90-00503	Pg 89	AT20-00683	Pg 30	AT41-09110	Pg 29	AY30-00140	Pg 65	AY40-02111	Pg 53
AS90-00504	Pg 89	AT20-00693	Pg 30	AT41-09130	Pg 29	AY30-00160	Pg 65	AY40-02113	Pg 53
AS90-00506	Pg 89	AT20-00903	Pg 30	AT44-09130	Pg 26	AY30-01010	Pg 65	AY40-02120	Pg 53
AS90-00600	Pg 89	AT20-00933	Pg 30	AT45- 06003	Pg 25	AY30-01020	Pg 87	AY40-02121	Pg 53
AS90-00603	Pg 89	AT20-00943	Pg 30	AT45-06013	Pg 25	AY30-01110	Pg 65	AY40-02123	Pg 53
AS90-00604	Pg 89	AT20-00953	Pg 30	AT45-06033	Pg 25	AY30-01120	Pg 65	AY40-02130	Pg 53
AS90-00606	Pg 89	AT20-00963	Pg 30	AT45-06103	Pg 25	AY30-01130	Pg 65	AY40-02131	Pg 53
AS90-00700	Pg 89	AT20-00973	Pg 30	AT45-06113	Pg 25	AY30-02006	Pg 68	AY40-02133	Pg 53
AS90-00703	Pg 89	AT20-00983	Pg 30	AT45-06133	Pg 25	AY30-02019	Pg 68	AY40-02140	Pg 53
AS90-00706	Pg 89	AT20-00993	Pg 30	AT45-29203	Pg 25	AY30-02021	Pg 68	AY40-02141	Pg 53
AS90-00709	Pg 89	AT20-01203	Pg 31	AT45-29213	Pg 25	AY31-01010	Pg 68	AY40-02143	Pg 53
AT01-00630	Pg 38	AT20-01233	Pg 31	AT45-29233	Pg 25	AY31-01030	Pg 68	AY40-02150	Pg 53
AT01-01230	Pg 38	AT20-01243	Pg 31	AT45-29403	Pg 25	AY31-01040	Pg 68	AY40-02151	Pg 53
AT02-00600	Pg 38	AT20-01253	Pg 31	AT45-29413	Pg 25	AY31-01050	Pg 68	AY40-02153	Pg 53
AT02-00610	Pg 38	AT20-01263	Pg 31	AT45-29433	Pg 25	AY31-02010	Pg 68	AY40-02160	Pg 53
AT02-00630	Pg 38	AT20-01273	Pg 31	AT61-01002	Pg 21	AY40-00110	Pg 52	AY40-02161	Pg 53
AT02-01200	Pg 38	AT20-01283	Pg 31	AT61-01032	Pg 21	AY40-00111	Pg 52	AY40-02163	Pg 53
AT02-01210	Pg 38	AT20-01293	Pg 31	AT61-01052	Pg 21	AY40-00113	Pg 52	AY45-00100	Pg 76
AT02-01230	Pg 38	AT20-01803	Pg 31	AT61-02002	Pg 21	AY40-00120	Pg 52	AY45-00101	Pg 76
AT03-00600	Pg 36	AT20-01833	Pg 31	AT61-02032	Pg 21	AY40-00121	Pg 52	AY45-00200	Pg 76
AT03-00610	Pg 36	AT20-01843	Pg 31	AT61-02052	Pg 21	AY40-00123	Pg 52	AY90-00100	Pg 65
AT03-00630	Pg 36	AT20-01853	Pg 31	AT61-03002	Pg 21	AY40-00130	Pg 52	AY90-00101	Pg 65
AT03-01200	Pg 36	AT20-01863	Pg 31	AT61-03032	Pg 21	AY40-00131	Pg 52	AY90-00102	Pg 65
AT03-01210	Pg 36	AT20-01873	Pg 31	AT61-03052	Pg 21	AY40-00133	Pg 52	AY90-00104	Pg 65
AT03-01230	Pg 36	AT20-01883	Pg 31	AT61-05002	Pg 21	AY40-00200	Pg 52	AY90-00105	Pg 65
AT03-10600	Pg 36	AT20-01893	Pg 31	AT61-05032	Pg 21	AY40-00201	Pg 52	AY90-00106	Pg 65
AT03-10610	Pg 36	AT20-03603	Pg 31	AT61-05052	Pg 21	AY40-00203	Pg 52	AY90-00107	Pg 65
AT03-10630	Pg 36	AT20-03633	Pg 31	AT61-05058	Pg 21	AY40-00210	Pg 52	T0595-003	Pg 89
AT03-11200	Pg 36	AT20-03643	Pg 31	AT61-07002	Pg 22	AY40-00211	Pg 52	T0595-004	Pg 89
AT03-11210	Pg 36	AT20-03653	Pg 31	AT61-07032	Pg 22	AY40-00213	Pg 52	T0595-005	Pg 89
AT03-11230	Pg 36	AT20-03663	Pg 31	AT61-09102	Pg 22	AY40-00220	Pg 52	T0595-006	Pg 89
AT10-00800	Pg 59	AT20-03673	Pg 31						

Recessed Type Slim LED Panels





High strength with welded aluminium frame structure. Frame colour choice in desired RAL code. PMMA or PS LGP diffuser choice of high quality and transmittance. It offers a bropros usage choice with various powers and colour choices and its features which do not cause glare, dark zone or hotspot with its close and efficient led array. Production can be done at 30- 60- 120 cm standard and at special dimensions. DALI, triac dimming and emergency kid applications are optional.

Technical Specifications	300 X300	600X600	600X600
Power Consumption	12 W +/- 5%	40 W +/- 5%	48 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	68 mA	190 mA	200 mA
Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,95 Pf	0,95 Pf
Driver Efficiency	89 %	89 %	89 %
Lumen/Watt	85 lm/W	85 lm/W	85 lm/W
LED Pcs	60 pcs	204 pcs	204 pcs
Beam Angle	100°	100°	100°
LED Type	4014	4014	4014
CRI	Ra≥80	Ra≥80	Ra≥80
Lumen	1,020 lm	3,400 lm	4,080 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP 20	IP 20	IP 20
Warranty	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours

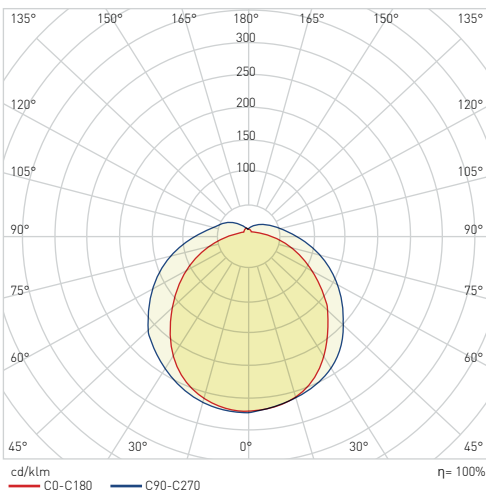

Please ask if you need customized quality products.

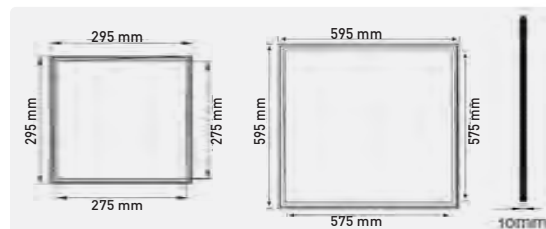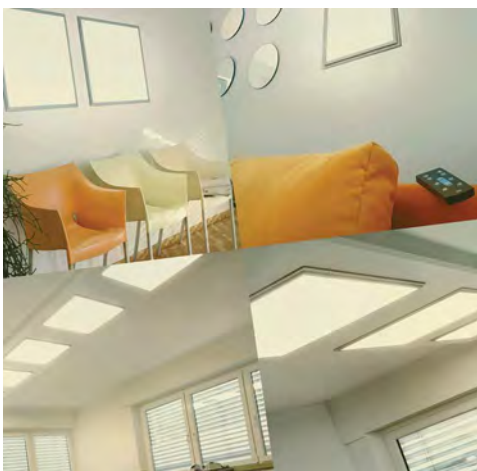

12 W

Code	Cutting Size	CCT	Lumen
AP16-23300	275 x 275	3000K	900 lm
AP16-23310	275 x 275	4000K	1020 lm
AP16-23330	275 x 275	6500K	1020 lm

Qty in Box: 10 pcs

40 W

Code	Cutting Size	CCT	Lumen
AP16-46600	575 x 575	3000K	3000 lm
AP16-46610	575 x 575	4000K	3200 lm
AP16-46630	575 x 575	6500K	3400 lm

Qty in Box: 5 pcs

48 W

Code	Cutting Size	CCT	Lumen
AP16-56600	575 x 575	3000K	3600 lm
AP16-56610	575 x 575	4000K	3850 lm
AP16-56630	575 x 575	6500K	4,080 lm

Qty in Box: 5 pcs

Recessed Type Slim LED Panels

High strength with welded aluminium frame structure. Frame colour choice in desired RAL code. PMMA or PS LGP diffuser choice of high quality and transmittance. It offers a bropcs usage choice with various powers and colour choices and its features which do not cause glare, dark zone or hotspot with its close and efficient led array. Production can be done at 30- 60- 120 cm standard and at special dimensions. DALI, triac dimming and emergency kid applications are optional.

Technical Specifications	300 X600	300X1200
Power Consumption	24 W +/- 5%	40 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	100 mA	190 mA
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,95 Pf
Driver Efficiency	89 %	89 %
Lumen/Watt	85 lm/W	85 lm/W
LED Pcs	120 pcs	204 pcs
Beam Angle	100°	100°
LED Type	4014	4014
CRI	Ra≥80	Ra≥80
Lumen	2,040 lm	3,400 lm
Operating Temp.	-20/+45 °C	-20/+45 °C
IP	IP 20	IP 20
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours

24 W

Code	Cutting Size	CCT	Lumen
AP16-33600	275 x 575	3000K	1800 lm
AP16-33610	275 x 575	4000K	2040 lm
AP16-33630	275 x 575	6500K	2040 lm

Qty in Box: 10 pcs


40 W

Code	Cutting Size	CCT	Lumen
AP16-43100	275 x 1175	3000K	3000 lm
AP16-43110	275 x 1175	4000K	3200 lm
AP16-43130	275 x 1175	6500K	3400 lm

Qty in Box: 5 pcs

Surface Mounting Frame for Recessed Type Slim LED Panels

Code	Type	Size
6001-013	Surface Frame	60 cm x 60 cm
6001-016	Surface Frame	30 cm x 30 cm
6001-017	Surface Frame	30 cm x 60 cm
6001-018	Surface Frame	30 cm x 120 cm

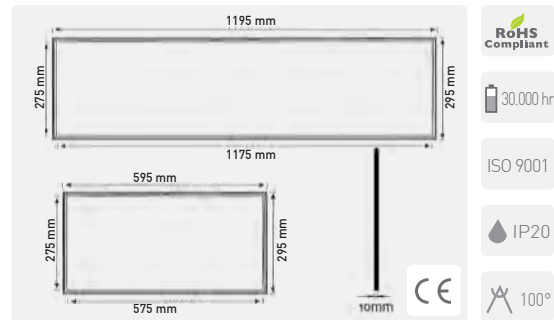

RoHS Compliant


30.000 hr

ISO 9001

IP20

100°

Turkey
Discover
the potential

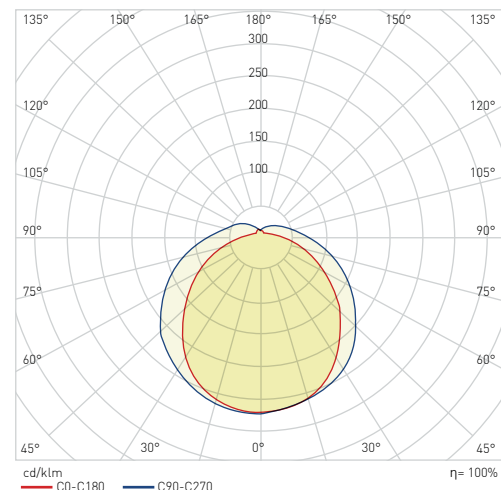


Please ask if you need customized quality products.

Clip-in Recessed Type Slim LED Panels



High strength with welded aluminium frame structure. Frame colour choice in desired RAL code. PMMA or PS LGP diffuser choice of high quality and transmittance. It offers a bropcs usage choice with various powers and colour choices and its features which do not cause glare, dark zone or hotspot with its close and efficient led array. Production can be done at 30- 60- 120 cm standard and at special dimensions. DALI, triac dimming and emergency kid applications are optional.

Technical Specifications	300 X300	600X600
Power Consumption	12 W +/- 5%	40 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	100 mA	190 mA
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,95 Pf
Driver Efficiency	89 %	89 %
Lumen/Watt	85 lm/W	85 lm/W
LED Pcs	60 pcs	204 pcs
Beam Angle	100°	100°
LED Type	4014	4014
CRI	Ra≥80	Ra≥80
Lumen	1,020 lm	3,400 lm
Operating Temp.	-20/+45 °C	-20/+45 °C
IP	IP 20	IP 20
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours

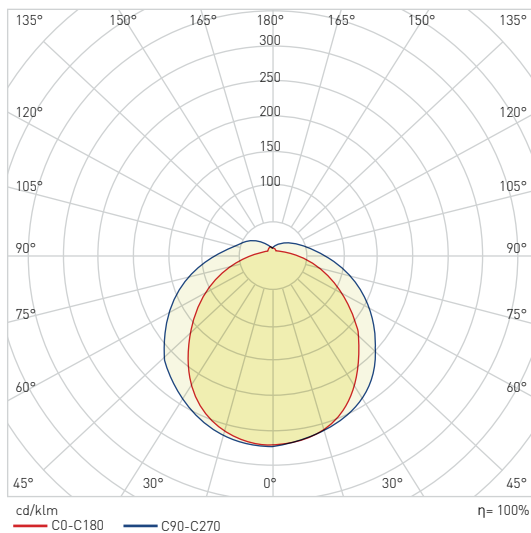

Please ask if you need customized quality products.

12 W


Code	Cutting Size	CCT	Lumen
AP17-33300	275 x 275	3000K	900 lm
AP17-33310	275 x 275	4000K	1020 lm
AP17-33330	275 x 275	6500K	1020 lm

Qty in Box: 10 pcs

40 W

Code	Cutting Size	CCT	Lumen
AP17-46600	575 x 575	3000K	3000 lm
AP17-46610	575 x 575	4000K	3400 lm
AP17-46630	575 x 575	6500K	3400 lm

Qty in Box: 5 pcs

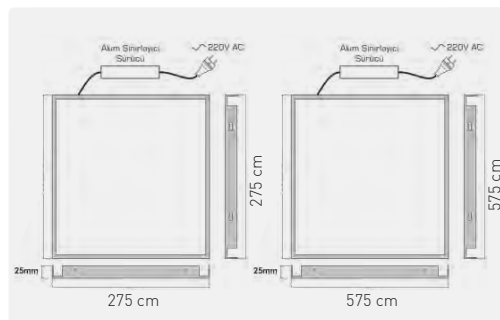

LED Backlights

High strength with welded aluminium frame structure. Frame colour choice in desired RAL code. PMMA or PS LGP diffuser choice of high quality and transmittance. It offers a bropcs usage choice with various powers and colour choices and its features which do not cause glare, dark zone or hotspot with its close and efficient led array. Production can be done at 30- 60- 120 cm standard and at special dimensions. DALI, triac dimming and emergency kid applications are optional.

Technical Specifications	300 X 300	600 X 600	600 X 600
Power Consumption	15 W +/- 5%	36 W +/- 5%	42 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,068 A	0,163 A	0,190 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Cor.	0,95 Pf	0,95 Pf	0,95 Pf
Driver Efficiency	87 %	90 %	90 %
Lumen/Watt	85 lm/W	85 lm/W	85 lm/W
Beam Angle	100°	100°	100°
LED Type	2835	2835	2835
CCT	3000-4000-6500	3000-4000-6500	3000-4000-6500
CRI	Ra≥80	Ra≥80	Ra≥80
Lumen	1,275 lm	3,060 lm	3,570 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP 20	IP 20	IP 20
Warranty	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours




36 W	Code	Type	CCT	Lumen	Qty in Box
600 X 600	AP20-26600	Recessed	3000K	2900 lm	5 pcs
	AP20-26610	Recessed	4000K	3000 lm	5 pcs
	AP20-26630	Recessed	6500K	3060 lm	5 pcs

	Code	Type	CCT	Lumen	Qty in Box
600 X 600	AP21-26600	Surface	3000K	2900 lm	5 pcs
	AP21-26610	Surface	4000K	3000 lm	5 pcs
	AP21-26630	Surface	6500K	3060 lm	5 pcs

42 W	Code	Type	CCT	Lumen	Qty in Box
600 X 600	AP20-46600	Recessed	3000K	3300 lm	5 pcs
	AP20-46610	Recessed	4000K	3400 lm	5 pcs
	AP20-46630	Recessed	6500K	3570 lm	5 pcs

	Code	Type	CCT	Lumen	Qty in Box
600 X 600	AP21-46600	Surface	3000K	3300 lm	5 pcs
	AP21-46610	Surface	4000K	3400 lm	5 pcs
	AP21-46630	Surface	6500K	3570 lm	5 pcs

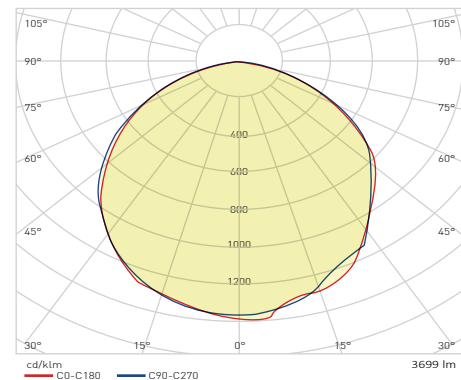

Please ask if you need customized quality products.

Recessed Type Round LED Panels / White



ISO 9001



Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF



Turkey
Discover
the potential

OSRAM LED

Code	Power	Cutting Size	Lumen	CCT	Body	Qty in Box	
AP01-00300	3 W	65 mm	255 lm	3000K	White	40 pcs.	
AP01-00310	3 W	65 mm	255 lm	4000K	White	40 pcs.	
AP01-00330	3 W	65 mm	255 lm	6500K	White	40 pcs.	
AP01-00600	6 W	105 mm	510 lm	3000K	White	40 pcs.	
AP01-00610	6 W	105 mm	510 lm	4000K	White	40 pcs.	
AP01-00630	6 W	105 mm	510 lm	6500K	White	40 pcs.	
AP01-00900	9 W	130 mm	765 lm	3000K	White	40 pcs.	
AP01-00910	9 W	130 mm	765 lm	4000K	White	40 pcs.	
AP01-00930	9 W	130 mm	765 lm	6500K	White	40 pcs.	
AP01-01200	12 W	155 mm	1020 lm	3000K	White	20 pcs.	
AP01-01210	12 W	155 mm	1020 lm	4000K	White	20 pcs.	
AP01-01230	12 W	155 mm	1020 lm	6500K	White	20 pcs.	
AP01-01500	15 W	175 mm	1275 lm	3000K	White	20 pcs.	
AP01-01510	15 W	175 mm	1275 lm	4000K	White	20 pcs.	
AP01-01530	15 W	175 mm	1275 lm	6500K	White	20 pcs.	
AP01-01534	15 W	175 mm	1275 lm	6500K	Satin	20 pcs.	
AP01-01800	18 W	205 mm	1530 lm	3000K	White	20 pcs.	
AP01-01810	18 W	205 mm	1530 lm	4000K	White	20 pcs.	
AP01-01830	18 W	205 mm	1530 lm	6500K	White	20 pcs.	
AP01-01834	18 W	205 mm	1530 lm	6500K	Satin	20 pcs.	
AP01-02000	20 W	220 mm	1700 lm	3000K	White	20 pcs.	
AP01-02010	20 W	220 mm	1700 lm	4000K	White	20 pcs.	
AP01-02030	20 W	220 mm	1700 lm	6500K	White	20 pcs.	

Recessed Type Round LED Panels / Black



ISO 9001

30,000 hr

IP20

115°

Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF

Turkey
Discover
the potential



OSRAM LED

Code	Power	Cutting Size	Lumen	CCT	Body	Qty in Box	
AP01-00301	3 W	65 mm	255 lm	3000K	Black	40 pcs.	
AP01-00311	3 W	65 mm	255 lm	4000K	Black	40 pcs.	
AP01-00331	3 W	65 mm	255 lm	6500K	Black	40 pcs.	
AP01-00601	6 W	105 mm	510 lm	3000K	Black	40 pcs.	
AP01-00611	6 W	105 mm	510 lm	4000K	Black	40 pcs.	
AP01-00631	6 W	105 mm	510 lm	6500K	Black	40 pcs.	
AP01-00901	9 W	130 mm	765 lm	3000K	Black	40 pcs.	
AP01-00911	9 W	130 mm	765 lm	4000K	Black	40 pcs.	
AP01-00931	9 W	130 mm	765 lm	6500K	Black	40 pcs.	
AP01-01201	12 W	155 mm	1020 lm	3000K	Black	20 pcs.	
AP01-01211	12 W	155 mm	1020 lm	4000K	Black	20 pcs.	
AP01-01231	12 W	155 mm	1020 lm	6500K	Black	20 pcs.	
AP01-01501	15 W	175 mm	1275 lm	3000K	Black	20 pcs.	
AP01-01511	15 W	175 mm	1275 lm	4000K	Black	20 pcs.	
AP01-01531	15 W	175 mm	1275 lm	6500K	Black	20 pcs.	
AP01-01801	18 W	205 mm	1530 lm	3000K	Black	20 pcs.	
AP01-01811	18 W	205 mm	1530 lm	4000K	Black	20 pcs.	
AP01-01831	18 W	205 mm	1530 lm	6500K	Black	20 pcs.	
AP01-02001	20 W	220 mm	1700 lm	3000K	Black	20 pcs.	
AP01-02011	20 W	220 mm	1700 lm	4000K	Black	20 pcs.	
AP01-02031	20 W	220 mm	1700 lm	6500K	Black	20 pcs.	

Surface Type Square LED Panels (White)

RoHS Compliant | CE | ISO 9001 | 30.000 hr | IP20 | 115°

Code	Power	Size (mm)	Lumen	CCT	Body	Qty in Box
AP04-01200	12 W	170 x 170 x 40	1020 lm	3000K	White	20 Pcs.
AP04-01210	12 W	170 x 170 x 40	1020 lm	4000K	White	20 Pcs.
AP04-01230	12 W	170 x 170 x 40	1020 lm	6500K	White	20 Pcs.
AP04-01800	18 W	220 x 220 x 40	1530 lm	3000K	White	20 Pcs.
AP04-01810	18 W	220 x 220 x 40	1530 lm	4000K	White	20 Pcs.
AP04-01830	18 W	220 x 220 x 40	1530 lm	6500K	White	20 Pcs.
AP04-02400	24 W	300 x 300 x 40	1870 lm	3000K	White	10 Pcs.
AP04-02410	24 W	300 x 300 x 40	1870 lm	4000K	White	10 Pcs.
AP04-02430	24 W	300 x 300 x 40	1870 lm	6500K	White	10 Pcs.
AP04-03300	32 W	400 x 400 x 40	2720 lm	3000K	White	10 Pcs.
AP04-03310	32 W	400 x 400 x 40	2720 lm	4000K	White	10 Pcs.
AP04-03330	32 W	400 x 400 x 40	2720 lm	6500K	White	10 Pcs.



Turkey
Discover the potential

Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF



Surface Type Square LED Panels (Black)

RoHS Compliant | CE | ISO 9001 | 30.000 hr | IP20 | 115°

Code	Power	Size (mm)	Lumen	CCT	Body	Qty in Box
AP04-01201	12 W	170 x 170 x 40	1020 lm	3000K	Black	20 Pcs.
AP04-01211	12 W	170 x 170 x 40	1020 lm	4000K	Black	20 Pcs.
AP04-01231	12 W	170 x 170 x 40	1020 lm	6500K	Black	20 Pcs.
AP04-01801	18 W	220 x 220 x 40	1530 lm	3000K	Black	20 Pcs.
AP04-01811	18 W	220 x 220 x 40	1530 lm	4000K	Black	20 Pcs.
AP04-01831	18 W	220 x 220 x 40	1530 lm	6500K	Black	20 Pcs.
AP04-02401	24 W	300 x 300 x 40	1870 lm	3000K	Black	10 Pcs.
AP04-02411	24 W	300 x 300 x 40	1870 lm	4000K	Black	10 Pcs.
AP04-02431	24 W	300 x 300 x 40	1870 lm	6500K	Black	10 Pcs.
AP04-03301	32 W	400 x 400 x 40	2720 lm	3000K	Black	10 Pcs.
AP04-03311	32 W	400 x 400 x 40	2720 lm	4000K	Black	10 Pcs.
AP04-03331	32 W	400 x 400 x 40	2720 lm	6500K	Black	10 Pcs.



Turkey
Discover the potential

Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF

LED Panels

Surface Type Round LED Panels (White)

RoHS Compliant | CE | ISO 9001 | 30,000 hr | IP20 | 115°

Code	Power	Size (mm)	Lumen	CCT	Body	Qty in Box
AP03-01200	12 W	φ170 x 40	1020 lm	3000K	White	20 Pcs.
AP03-01210	12 W	φ170 x 40	1020 lm	4000K	White	20 Pcs.
AP03-01230	12 W	φ170 x 40	1020 lm	6500K	White	20 Pcs.
AP03-01800	18 W	φ220 x 40	1530 lm	3000K	White	20 Pcs.
AP03-01810	18 W	φ220 x 40	1530 lm	4000K	White	20 Pcs.
AP03-01830	18 W	φ220 x 40	1530 lm	6500K	White	20 Pcs.
AP03-02400	24 W	φ300 x 40	2040 lm	3000K	White	10 Pcs.
AP03-02410	24 W	φ300 x 40	2040 lm	4000K	White	10 Pcs.
AP03-02430	24 W	φ300 x 40	2040 lm	6500K	White	10 Pcs.

OSRAM LED



Turkey
Discover
the potential

Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF



Surface Type Round LED Panels(Black)

RoHS Compliant | CE | ISO 9001 | 30,000 hr | IP20 | 115°

Code	Power	Size (mm)	Lumen	CCT	Body	Qty in Box
AP03-01201	12 W	φ170 x 40	1020 lm	3000K	Black	20 Pcs.
AP03-01211	12 W	φ170 x 40	1020 lm	4000K	Black	20 Pcs.
AP03-01231	12 W	φ170 x 40	1020 lm	6500K	Black	20 Pcs.
AP03-01801	18 W	φ220 x 40	1530 lm	3000K	Black	20 Pcs.
AP03-01811	18 W	φ220 x 40	1530 lm	4000K	Black	20 Pcs.
AP03-01831	18 W	φ220 x 40	1530 lm	6500K	Black	20 Pcs.
AP03-02401	24 W	φ300 x 40	2040 lm	3000K	Black	10 Pcs.
AP03-02411	24 W	φ300 x 40	2040 lm	4000K	Black	10 Pcs.
AP03-02431	24 W	φ300 x 40	2040 lm	6500K	Black	10 Pcs.

OSRAM LED



Turkey
Discover
the potential

Power Consumption : 220 V
Beam Angle : 115°
Power Factor : 0,90 PF

LED Panels



9W R/T Decorative LED Panels



130mm | IP20

Code	Power	Body	CCT	Lumen	Cutting Size	Qty in Box
AH04-10905	9 W	Chrome	3000K	720 lm	130 mm	20 Pcs.
AH04-10935	9 W	Chrome	6500K	720 lm	130 mm	20 Pcs.
AH04-10906	9 W	Gold	3000K	720 lm	130 mm	20 Pcs.



12W R/T Decorative LED Panels



155mm | IP20

Code	Power	Body	CCT	Lumen	Cutting Size	Qty in Box
AH04-11205	12 W	Chrome	3000K	960 lm	155 mm	20 Pcs.
AH04-11235	12 W	Chrome	6500K	960 lm	155 mm	20 Pcs.
AH04-11206	12 W	Gold	3000K	960 lm	155 mm	20 Pcs.
AH04-11236	12 W	Gold	6500K	960 lm	155 mm	20 Pcs.

R/T and S/T Round LED Panels and Downlights



30,000 hr | IP20 | 120°

Body: White



Code	Power	Size	Cutting Size	Lumen	CCT	Qty in Box
AP14-30830	8 W	120 mm x 35 mm	105 mm	720 lm	6500K	40 Pcs.
AP14-31230	12 W	155 mm x 35 mm	135 mm	1080 lm	6500K	20 Pcs.
AP14-31600	16 W	170 mm x 35 mm	155 mm	1440 lm	3000K	20 Pcs.
AP14-31630	16 W	170 mm x 35 mm	155 mm	1440 lm	6500K	20 Pcs.



Code	Power	Size	Cutting Size	Lumen	CCT	Body	Qty in Box
6005-005	12 W	170 mm x 30 mm	130 mm	1080 lm	6500K	White	20 Pcs.
6005-008	16 W	195 mm x 30 mm	155 mm	1440 lm	3000K	White	20 Pcs.
6005-007	16 W	195 mm x 30 mm	155 mm	1440 lm	6500K	White	20 Pcs.

Body: White




Code	Power	CCT
5005-001	8 W	6500K

Body: White+Clear



Code	Power	CCT
6008-007	16 W	6500K

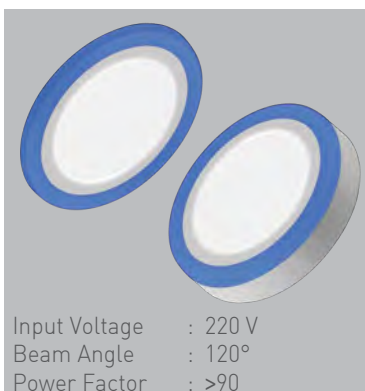

Recessed Type, Two Coloured Combination


Code	Power	Cutting Size	Lumen	CCT	Qty in Box
AP30-31200	12+2 W	155 mm	900 lm	3000K + Blue	20 Pcs.
AP30-31800	18+2 W	200 mm	1350 lm	3000K + Blue	10 Pcs.
AP30-31830	18+2 W	200 mm	1350 lm	6500K + Blue	10 Pcs.

Surface Type, Two Coloured Combination

Code	Power	Size (mm)	Lumen	CCT	Qty in Box
AP32-31200	12+2 W	φ200 x 40	900 lm	3000K + Blue	20 Pcs.
AP32-31800	18+2 W	φ240 x 40	1350 lm	3000K + Blue	10 Pcs.

LED Step and Wall Lights

LED Step and Wall Light



RoHS Compliant | CE | 53 mm | IP20

Code	CCT
AH07-00704	3000K
AH07-00734	6500K
AH07-00764	Blue




Input Voltage : 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

LED Step and Wall Light



RoHS Compliant | CE | 53 mm | IP20

Code	CCT
AH07-00904	3000K
AH07-00934	6500K
AH07-00964	Blue




Input Voltage: 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

LED Step and Wall Light



RoHS Compliant | CE | 90mmx35mm | IP20

Code	CCT
AH07-01104	3000K
AH07-01134	6500K
AH07-01164	Blue



Input Voltage: 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

LED Step and Wall Light with Sensor



RoHS Compliant | CE | 53 mm | IP20

Code	CCT
AH07-00604	3000K
AH07-00634	6500K
AH07-00664	Blue




Input Voltage : 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

LED Step and Wall Light with Sensor



RoHS Compliant | CE | 90mmx35mm | IP20

Code	CCT
AH07-00804	3000K
AH07-00834	6500K
AH07-00864	Blue




Input Voltage : 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

LED Step and Wall Light with Sensor



RoHS Compliant | CE | 90mmx35mm | IP20

Code	CCT
AH07-01004	3000K
AH07-01034	6500K
AH07-01064	Blue



Input Voltage : 220 V
Power : 1,5 W
IP : IP20
Qty in Box : 50 pcs

7 W LED Inground Fixture



RoHS Compliant | CE | 30,000 hr | IP67

Code	CCT
6605-001	White
6605-002	Warm White
6605-003	Blue

Size: 120 mm x 206 mm
Input Voltage : 220 V
Power : 7 W
Qty in Box : 8 pcs

LED Pool Fixtures



RoHS Compliant | CE | 30,000 hr | IP67

Code	CCT
6801-001	White
6801-002	Warm White

Trafosuz
Input Voltage : 12 V DC
Power : 6 W
Qty in Box : 6 pcs

Terra Modular Lighting System

Terra Aluminium Spotlight




RoHS Compliant | CE | 90mm | IP20

Code

AH03-04010

White Body



Cutting Size : 90 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 90mm | IP20

Code

AH03-04020

White Body



Cutting Size : 90 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code

AH03-04040

White Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code

AH03-04050

White Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 80mm | IP20

Code


AH03-04070

White Body



Cutting Size : 80 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 80mm | IP20

Code

AH03-04080

White Body



Cutting Size : 80 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code


AH03-04060

White Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code

AH03-04030

White Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Modular Lighting System

Terra Aluminium Spotlight



RoHS Compliant | CE | 90mm | IP20

Code


AH03-04011

Black Body



Cutting Size : 90 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 90mm | IP20

Code


AH03-04021

Black Body



Cutting Size : 90 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code

AH03-04041

Black Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 70mm | IP20

Code

AH03-04051

Black Body



Cutting Size : 70 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 80mm | IP20

Code


AH03-04071

Black Body



Cutting Size : 80 mm
Qty in Box : 100 pcs

Terra Aluminium Spotlight




RoHS Compliant | CE | 80mm | IP20

Code

AH03-04081

Black Body



Cutting Size : 80 mm
Qty in Box : 100 pcs

Terra 8W COB LED Light Module



Code

AH06-00001

CCT

3000K



AH06-00011

4000K

AH06-00031


6500K

Input Voltage : 220 V
Power : 8 W
Lumen : 640 lm
Beam Angle : 38°
Qty in Box : 50 pcs

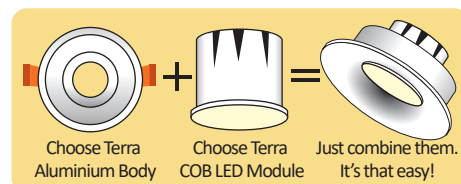

RoHS Compliant | CE | IP20

LED Floodlights

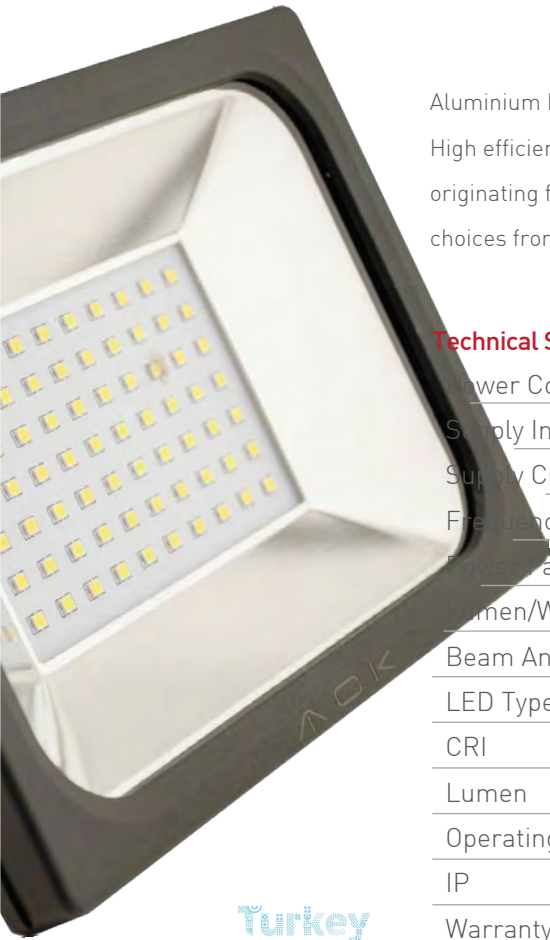



Turkey
Discover
the potential

Aluminium body and frame. Rustproof accessory. 4mm tempered glass. Anodize aluminium reflector. High efficiency SMD LEDs. It offers high power factor and high fixture efficiency by eliminating faults originating from driver with its Driver on Board (DOB) feature. It offers a broad power and lumen choices from 10 W to 400 W.

Technical Specifications



	10 W +/- 5%	20 W +/- 5%	30 W +/- 5%	50 W +/- 5%
Power Consumption	10 W +/- 5%	20 W +/- 5%	30 W +/- 5%	50 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,049 A	0,099 A	0,136 A	0,23 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,9 PF	0,9 PF	0,9 PF	0,9 PF
Lumen/Watt	90 lm/W	90 lm/W	90 lm/W	90 lm/W
Beam Angle	115 °	115 °	115 °	115 °
LED Type	2835 mm	2835 mm	2835 mm	2835 mm
CRI	Ra≥70	Ra ≥70	Ra≥70	Ra ≥70
Lumen	900 lm	1,800 lm	2700 lm	4,500 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP65	IP65	IP65	IP65
Warranty	2 Years	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours	30.000 Hours

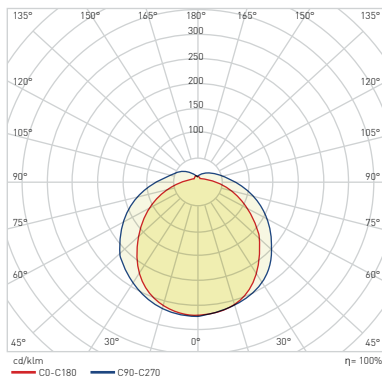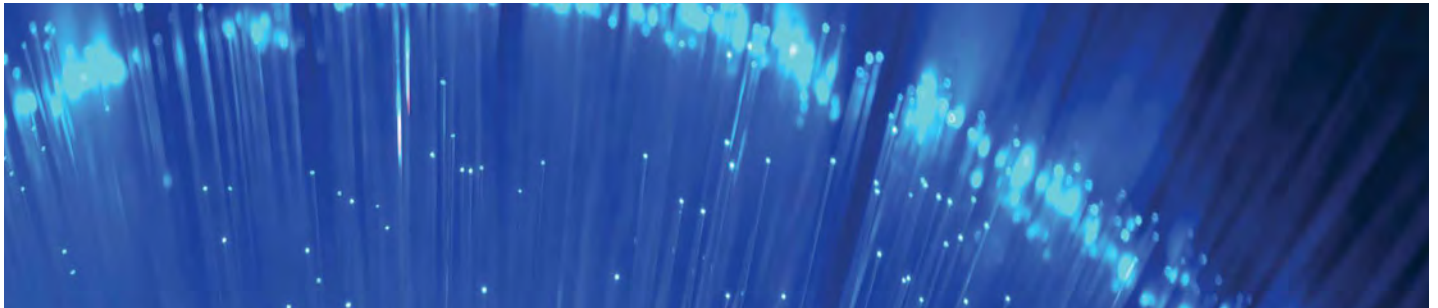

	70 W +/- 5%	100 W +/- 5%	150 W +/- 5%	200 W +/- 5%	400 W +/- 5%
Power Consumption	70 W +/- 5%	100 W +/- 5%	150 W +/- 5%	200 W +/- 5%	400 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,317 A	0,449 A	0,679 A	0,887 A	1,752 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,9 PF	0,9 PF	0,9 PF	0,9 PF	0,9 PF
Lumen/Watt	90 lm/W	86 lm/W	90 lm/W	90 lm/W	90 lm/W
Beam Angle	115 °	115 °	115 °	115 °	115 °
LED Type	2835 mm	2835 mm	2835 mm	2835 mm	2835 mm
CRI	Ra ≥70	Ra ≥70	Ra ≥70	Ra ≥70	Ra ≥70
Lumen	6,025 lm	8,600 lm	13,500 lm	18,000 lm	38,000 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP65	IP65	IP65	IP65	IP65
Warranty	2 Years	2 Years	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours	30.000 Hours	30.000 Hours

LED Floodlights

10 W LED Floodlight



ISO 9001


30.000 hr

IP65



Code	CCT	Lumen
AT61-01002	3000K	880 lm
AT61-01032	6500K	900 lm
AT61-01052	Green	-

Input Voltage : 220 V
Power : 10 W
Qty in Box : 30 Pcs

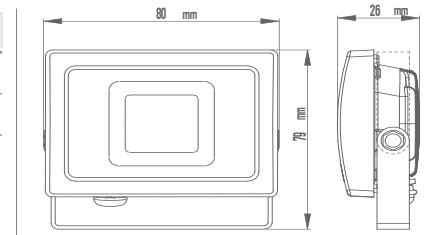

Turkey
Discover
the potential

20 W LED Floodlight



ISO 9001


30.000 hr

IP65



Code	CCT	Lumen
AT61-02002	3000K	1750 lm
AT61-02032	6500K	1800 lm
AT61-02052	Green	-

Input Voltage : 220 V
Power : 20 W
Qty in Box : 30 Pcs

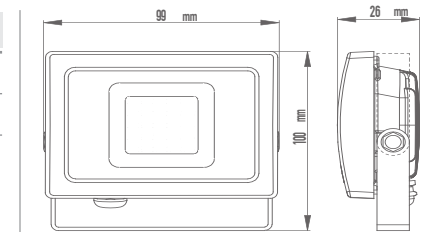

Turkey
Discover
the potential

30 W LED Floodlight



ISO 9001


30.000 hr

IP65



Code	CCT	Lumen
AT61-03002	3000K	2650 lm
AT61-03032	6500K	2700 lm
AT61-03052	Green	-

Input Voltage : 220 V
Power : 30 W
Qty in Box : 16 Pcs

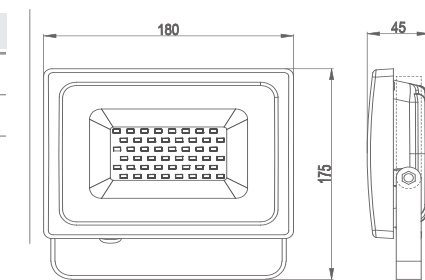

Turkey
Discover
the potential

50 W LED Floodlight



ISO 9001


30.000 hr

IP65



Code	CCT	Lumen
AT61-05002	3000K	4400 lm
AT61-05032	6500K	4500 lm
AT61-05052	Green	-
AT61-05082	Amber	-

Input Voltage : 220 V
Power : 50 W
Qty in Box : 10 Pcs

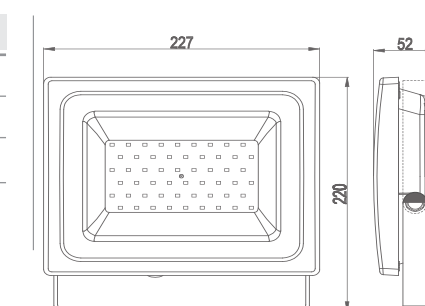

Turkey
Discover
the potential

LED Floodlights

70 W LED Floodlight



ISO 9001

30.000 hr

IP65




Code	CCT	Lumen
AT61-07002	3000K	5850 lm
AT61-07032	6500K	6025lm

Input Voltage : 220 V

Power : 70 W

Qty in Box : 5 Pcs



Turkey
Discover
the potential


100 W LED Floodlight



ISO 9001

30.000 hr

IP65




Code	CCT	Lumen
AT61-09102	3000K	8300 lm
AT61-09132	6500K	8600 lm

Input Voltage : 220 V

Power : 100 W

Qty in Box : 5 Pcs



Turkey
Discover
the potential

150 W LED Floodlight



ISO 9001

30.000 hr

IP65




Code	CCT	Lumen
AT61-09402	3000K	13300 lm
AT61-09432	6500K	13500 lm

Input Voltage : 220 V

Power : 150 W

Qty in Box : 3 Pcs



Turkey
Discover
the potential


200 W LED Floodlight



ISO 9001

30.000 hr

IP65

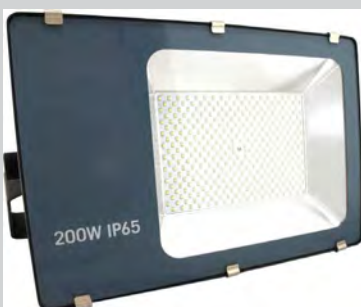


Code	CCT	Lumen
AT61-09602	3000K	17500 lm
AT61-09632	6500K	18000 lm

Input Voltage : 220 V

Power : 200 W

Qty in Box : 3 Pcs

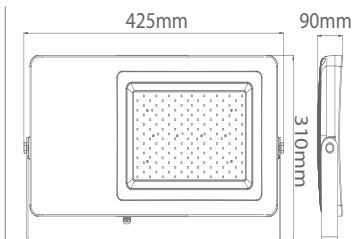

Turkey
Discover
the potential

LED Floodlights

400 W LED Floodlight



ISO 9001



Code	CCT	Lumen
AT61-09802	3000K	37000 lm
AT61-09832	6500K	38000 lm

Input Voltage : 220 V

Power : 400 W

Qty in Box : 1 Pcs



Turkey
Discover
the potential

20 W SMD LED Floodlight with Sensor



Code	Power
AT61-22032	20 W

CCT : 6500K

Turkey
Discover
the potential

Input Voltage : 220 V

IP : IP65

Lumen : 1750 lm

Qty in Box : 16 pcs



ISO 9001



30 W SMD LED Floodlight with Sensor



Code	Power
AT61-23032	30 W

CCT : 6500K

Turkey
Discover
the potential

Input Voltage : 220 V

IP : IP65

Lumen : 2700 lm

Qty in Box : 16 pcs



ISO 9001



50 W SMD LED Floodlight with Sensor



Code	Power
AT61-25032	50 W

CCT : 6500K

Turkey
Discover
the potential

Input Voltage : 220 V

IP : IP65

Lumen : 4500 lm

Qty in Box : 5 pcs



ISO 9001



24 Volt / 50 W SMD LED Floodlight



Code	Power
AT61-45032	50 W

CCT : 6500K

Input Voltage : 24 V DC

Lumen : 4500 lm

IP : IP65


Qty in Box : 10 pcs



ISO 9001



70 W COB LED Floodlight



Code	CCT
5602-012	3000K

Input Voltage : 220 V

Power : 70 W

Lumen : 5600 lm

IP : IP65

Qty in Box : 2 pcs




ISO 9001



LED High Bay Luminaires

Design feature providing perfect heat distribution for hot environments with aluminium body, frame, PCB and conventional cooling design. High safety and efficient optical alternatives with tempered glass and PC lens options.




It can offer power, lumen and angle options suitable for different ceiling heights. By means of its highly leak-tight silicone seal structure it can ensure maximum protection against corrosive stream, moisture and chemical vapours.

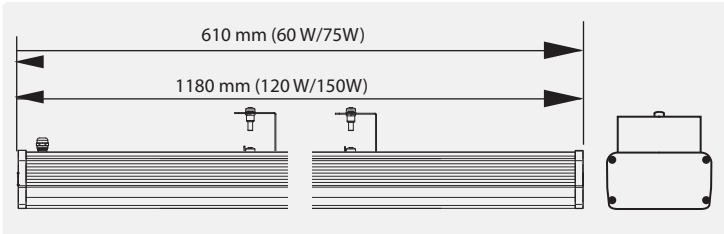

High temperature and overload protection

Output ripple current (10 hz) <1%

Technical Spec.	610 mm	610 mm	910 mm	1180 mm	1180 mm
Power Consumption	60 W +/- 5%	75 W +/- 5%	100 W +/- 5%	120 W +/- 5%	150 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,28 A	0,34 A	0,45 A	0,57 A	0,68 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor	0,98 PF	0,98 PF	0,98 PF	0,98 PF	0,98 PF
Driver Efficiency	96%	96%	96%	96%	96%
Lumen/Watt	133 lm/W	133 lm/W	133 lm/W	133 lm/W	133 lm/W
Beam Angle	60° Standard / 30°, 90° ve Asimetric is optional				
LED Type	3030 mm	3030 mm	3030 mm	3030 mm	3030 mm
CRI	Ra≥70-80	Ra≥70-80	Ra≥70-80	Ra≥70-80	Ra≥70-80
Lumen	8.000 lm	10.000 lm	13.300 lm	16.000 lm	20.000 lm
Operating Temp.	-40+65 °C	-40+65 °C	-40+65 °C	-40+65 °C	-40+65 °C
IP	IP65	IP65	IP65	IP65	IP65
Surge Capability	4 kv	4 kv	4 kv	4 kv	4 kv
Warranty	2 Years	2 Years	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours	30.000 Hours	30.000 Hours

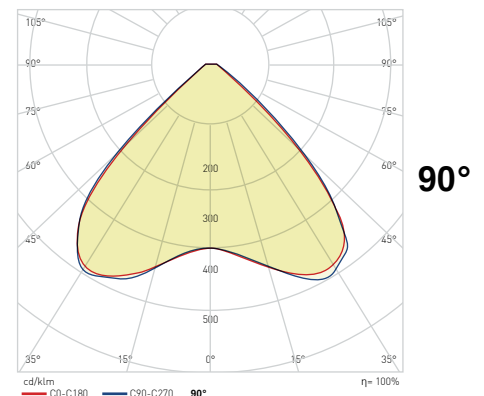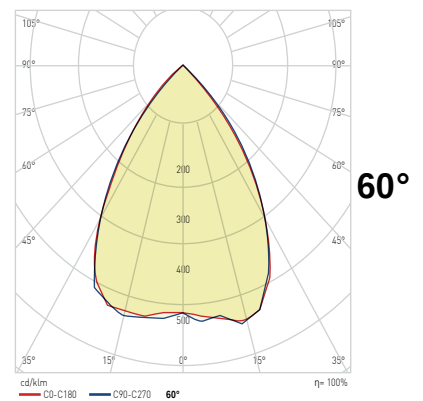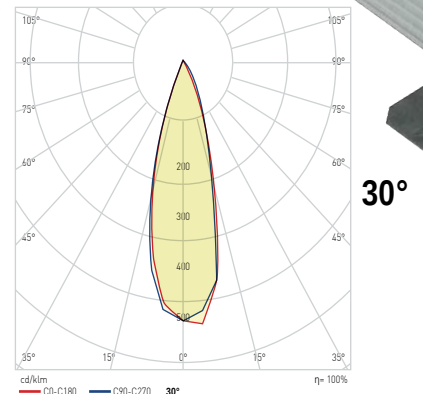


OSRAM LED
LUMILEDS | **NICHIA**
OSRAM Driver Industry Series | **PHILIPS** Driver

RoHS Compliant

CE

30.000 hr

IP65

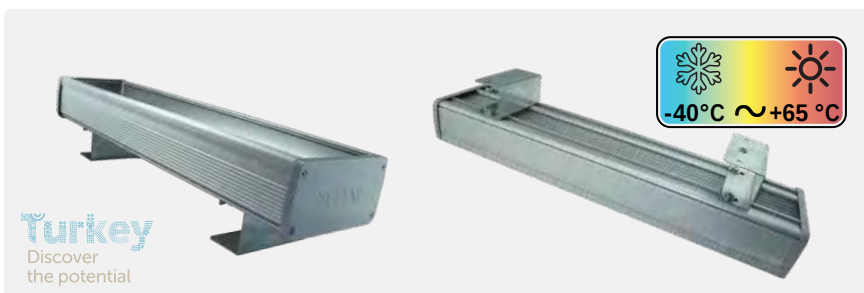

Turkey
Discover the potential

LED High Bay Luminaires



60 W	Code	Power	Length	CCT	Lumen
	AT45- 06003	60 W	610 mm	3000K	7,700 lm
	AT45-06013	60 W	610 mm	4000K	7,800 lm
	AT45-06033	60 W	610 mm	6500K	8,000 lm

75 W	Code	Power	Length	CCT	Lumen
	AT45-07503	75 W	610 mm	3000K	9,850 lm
	AT45-07513	75 W	610 mm	4000K	9,900 lm
	AT45-07533	75 W	610 mm	6500K	10,000 lm

100W	Code	Power	Length	CCT	Lumen
	AT45-19103	100 W	910 mm	3000K	13,000 lm
	AT45-19113	100 W	910 mm	4000K	13,100 lm
	AT45-19133	100 W	910 mm	6500K	13,300 lm

120W	Code	Power	Length	CCT	Lumen
	AT45-29203	120 W	1180 mm	3000K	15,700 lm
	AT45-29213	120 W	1180 mm	4000K	15,800 lm
	AT45-29233	120 W	1180 mm	6500K	16,000 lm

150W	Code	Power	Length	CCT	Lumen
	AT45-29403	150 W	1180 mm	3000K	19,700 lm
	AT45-29413	150 W	1180 mm	4000K	19,800 lm
	AT45-29433	150 W	1180 mm	6500K	20,000 lm



LED High Bay Luminaires

UFO - LED Industrial Ceiling Light



Simple easy to replace self cleaning design that guarantees a clean led light and complies with fluid dynamics.

Less heat radiation with dust-free conventional design. The surface with black anodized treatment absorbs the heat better.

Technical Specifications

Power Consumption	100 W +/- 5%
Supply Input Voltage	AC 180-240 V
Supply Current	100 mA
Frequency	50-60 Hz
Power Factor Correction	0,95 Pf
Lumen/Watt	100 lm/W
Beam Angle	70°
CRI	Ra≥70
Lumen	10,000 lm
Operating Temp.	-20/+45 °C
IP	IP 54
Warranty	2 Years

Code	Power	Beam Angle	CCT
AT44-09130	100 W	70°	6500K

Qty in Box: 4 pcs.

LED Spots

5W COB LED Spotlight



Code	Body .	CCT
AD01-00500	White	3000K
AD01-00510	White	4000K
AD01-00530	White	6500K

Input Voltage : 220 V
Power : 5 W
Qty in Box : 100 pcs



2W Recessed LED Spotlight



Code	CCT
AH06-00850	Green

Input Voltage : 220 V
Cutting Size : 35 mm
Qty in Box : 100 pcs



13W COB LED Spotlight



Code	
5006-005	
Input Voltage	: 220 V
Power	: 13 W
Lumen	: 1100 lm
Cutting Size	: 80 mm
Beam Angle	: 160°
Qty in Box	: 20 pcs




CCT: 6500K



Full Spectrum LED Grow Lights


Full spectrum is a type of lighting that covers all wavelengths useful for plants and animals. Although the part of sunlight that reaches the earth changes according to time latitude and atmospheric conditions sunlight is accepted as full spectrum. Turk full spectrum plant growing luminaire provides high efficiency full spectrum light with healthy red/blue ratio to direct photosynthe-

sis. Light energy between 500-599 nm penetrates deep into the plant canopy ,which promotes photomorphogenic responses. Highly colored white light helps to quickly identify potential threats to your plant and provides superior working conditions and safety for staff. It is ideal for both flowering and vegetative reproduction.

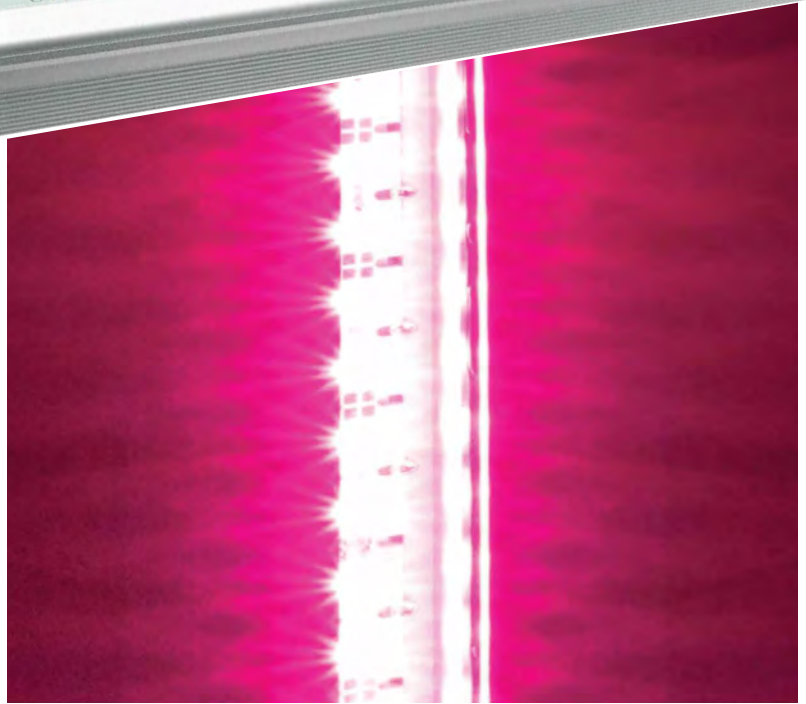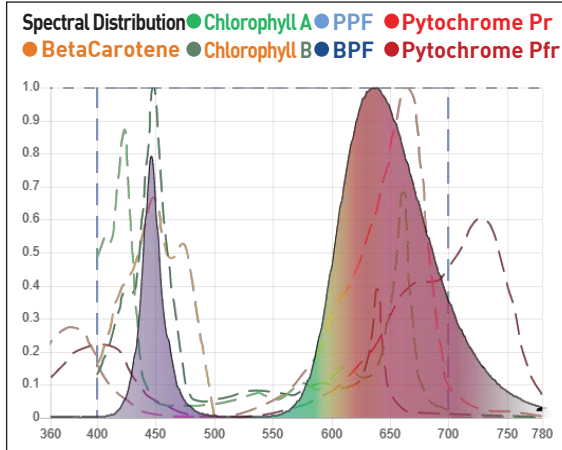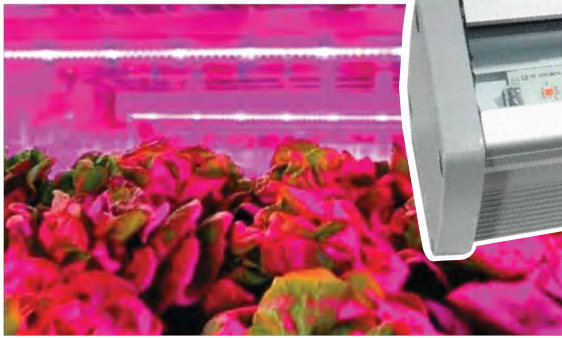

System Input Values

Target Lumen per Armature				18 W: 26 µmol/s		36 W: 52 µmol/s	
CCT	Code	Power	Lumen Rate	LED Lumen	LED Brightness	LED Voltage	LED Current
Purple (400-800 nm)	AT21-01800 / 18W		100 %	25 µmol/s	352,5 mW	6,37 V	150 mA
	AT21-03600 / 36W						

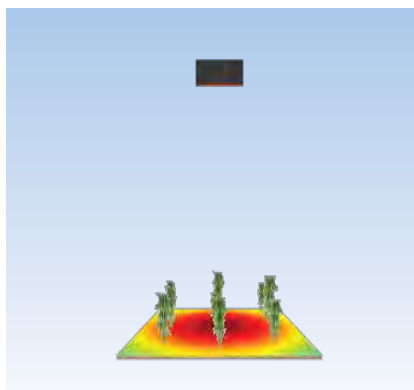

System Features	18W	36W
Optic Efficiency	90 %	90 %
Electrical Efficiency	90 %	90 %
Armature Installation		
Armature Length	500 mm	1000 mm
Armature Width	74 mm	74 mm



2 Years Warranty

System Output Values

Power	Light Flux Rate	LED Pcs	Light Flux	Photo-synthetic Lumen	Lumen Efficiency	Lumen density per area (PFD)
18W	100 %	18 pcs.	26 $\mu\text{mol/s}$	23 $\mu\text{mol/s}$	1,24 $\mu\text{mol/J}$	8,61 $\mu\text{mol/s/m}^2$
36W	100 %	36 pcs.	52 $\mu\text{mol/s}$	46 $\mu\text{mol/s}$	1,41 $\mu\text{mol/J}$	17,22 $\mu\text{mol/s/m}^2$



Discover the potential

LED Street Fixtures



The body and side parts are manufactured with aluminium injection material with high heat transmission feature and the surface reaction and chromate coating is painted with electrostatic powder paint. The lenses with PMAA material are resistant to high heat and these have suitable light distribution conforming to various road standards. All screws and connecting parts are rust proof.

Technical Specifications



Power Consumption	50 W +/- 5%
Supply Input Voltage	AC 220-240 V
Supply Current	0,23 A
Frequency	50-60 Hz
Power Factor Correction	0,95 PF
Driver Efficiency	90%
Lumen/Watt	100 lm/W
Beam Angle	Asimetric
LED Type	3030
CCT	3000-4000-6500
CRI	Ra ≥ 70-80
Lumen	5,000 lm
Operating Temp.	-20/+45 °C
IP	IP 65
Warranty	2 Years
LED Lifetime	30.000 Hours

50 W

Code	Power	CCT	Lumen
AT41-05000	50 W	3000K	4,800 lm
AT41-05010	50 W	4000K	4,900 lm
AT41-05030	50 W	6500K	5,000 lm

75 W

Code	Power	CCT	Lumen
AT41-08000	75 W	3000K	7,300 lm
AT41-08010	75 W	4000K	7,400 lm
AT41-08030	75 W	6500K	7,500 lm

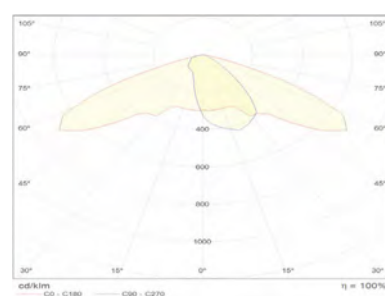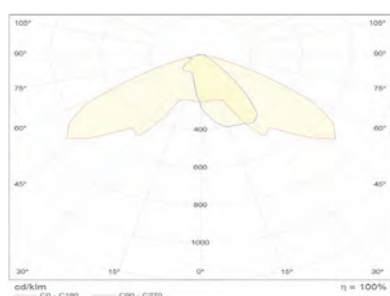

LED Street Fixture

The feeder cable is with rubber insulation and the cable entry gland is coated with brass nickel. The driver unit is independent of the LED part and can be easily replaced in case of a failure.

Its lightning protection level is standard 4-6KV and this can be increased to 10KV when requested. Photocell, Dali, Smart Dimming and Geodim options can be applied for the fittings.

Technical Specifications

Power Consumption	75 W +/- 5%	110 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	0,36 A	0,50 A
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 PF	0,95 PF
Driver Efficiency	90%	90%
Lumen/Watt	100 lm/W	100 lm/W
Beam Angle	Asimetric	Asimetric
LED Type	3030	3030
CCT	3000-4000-6500	3000-4000-6500
CRI	Ra ≥ 70-80	Ra ≥ 70-80
Lumen	7,500 lm	11,000 lm
Operating Temp.	-20/+45 °C	-20/+45 °C
IP	IP 65	IP 65
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours


110 W

Code	Power	CCT	Lumen
AT41-09100	110 W	3000K	10,800 lm
AT41-09110	110 W	4000K	10,900 lm
AT41-09130	110 W	6500K	11,000 lm

Qty in Box: 10 Pcs.
(for all watts)




Turkey
Discover
the potential

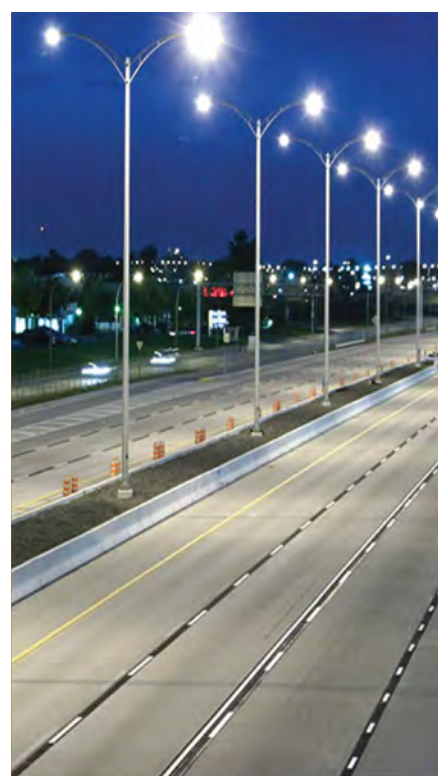

LED Wallwashers

The body section is 20 micron eloxal coated on 6063 series aluminium extrusion and can ensure maximum protection for atmospheric conditions. The side covers is made of aluminium injection material with surface treatments and chrome plating and painted with electrostatic powder paint resistant to external environment. Sealing components are produced of TPV material and ensures perfect insulation. IP68 etange brass nickel cable gland, pressure equalizing drain valve preventing condensation and rubber insulated feeder cable are included in the standard product features. It can offer different light effects for facades and objects with 10-30-45 degree standard high light transmission PMMA lens and 4mm tempered glass.


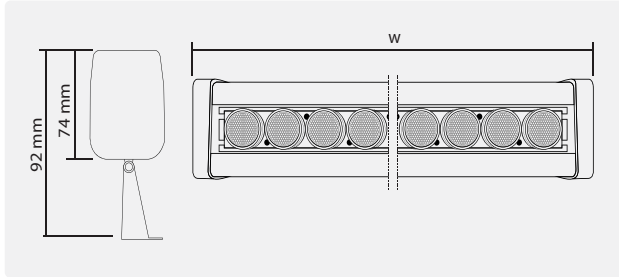


Technical Specifications

Power Consumption	6 W +/- 5%	9 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	27 mA	41 mA
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,95 Pf
Driver Efficiency	85 %	85 %
Lumen/Watt	80 lm/W	80 lm/W
Beam Angle	15°-30°-45°	15°-30°-45°
LED Type	3030	3030
CRI	Ra ≥70	Ra ≥70
Lumen	480 lm	720 lm
Operating Temp.	-20/+45 °C	-20/+45 °C
IP	IP 66	IP 66
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours
(W) Size	180 mm	270 mm



15°

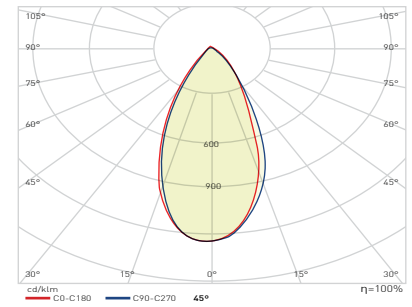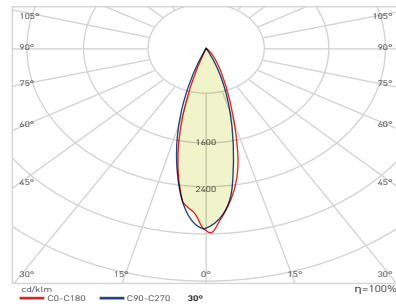

6 W LED Wallwasher



Code	Power	CCT	Std. Angle
AT20-00603	6 W	3000K	30°
AT20-00633	6 W	6500K	30°
AT20-00643	6 W	Red	30°
AT20-00653	6 W	Green	30°
AT20-00663	6 W	Blue	30°
AT20-00673	6 W	Yellow	30°
AT20-00683	6 W	Amber	30°
AT20-00693	6 W	RGB	30°

Qty in Box: 12

9 W LED Wallwasher



Code	Power	CCT	Std. Angle
AT20-00903	9 W	3000K	30°
AT20-00933	9 W	6500K	30°
AT20-00943	9 W	Red	30°
AT20-00953	9 W	Green	30°
AT20-00963	9 W	Blue	30°
AT20-00973	9 W	Yellow	30°
AT20-00983	9 W	Amber	30°
AT20-00993	9 W	RGB	30°

Qty in Box: 12

LED Wallwashers


Technical Specifications

Power Consumption	12 W +/- 5%	18 W +/- 5%	36 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	54 mA	82 mA	164 mA
Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,65 Pf	0,65 Pf
Driver Efficiency	85 %	90 %	90 %
Lumen/Watt	80 lm/W	80 lm/W	80 lm/W
Beam Angle	15°-30°45°	15°-30°-45°	15°-30°-45°
LED Type	3030	3030	3030
CRI	Ra≥70	Ra≥70	Ra≥70
Lumen	960 lm	1,440 lm	2,880 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP 66	IP 66	IP 66
Warranty	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours
(W) Size	360 mm	500 mm	1000 mm

12 W LED Wallwasher



ISO 9001




Code	Power	CCT	Std. Angle
AT20-01203	12 W	3000K	30°
AT20-01233	12 W	6500K	30°
AT20-01243	12 W	Red	30°
AT20-01253	12 W	Green	30°
AT20-01263	12 W	Blue	30°
AT20-01273	12 W	Yellow	30°
AT20-01283	12 W	Amber	30°
AT20-01293	12 W	RGB	30°

Qty in Box: 6

18 W LED Wallwasher



ISO 9001




Code	Power	CCT	Std. Angle
AT20-01803	18 W	3000K	30°
AT20-01833	18 W	6500K	30°
AT20-01843	18 W	Red	30°
AT20-01853	18 W	Green	30°
AT20-01863	18 W	Blue	30°
AT20-01873	18 W	Yellow	30°
AT20-01883	18 W	Amber	30°
AT20-01893	18 W	RGB	30°

Qty in Box: 6

36 W LED Wallwasher



ISO 9001

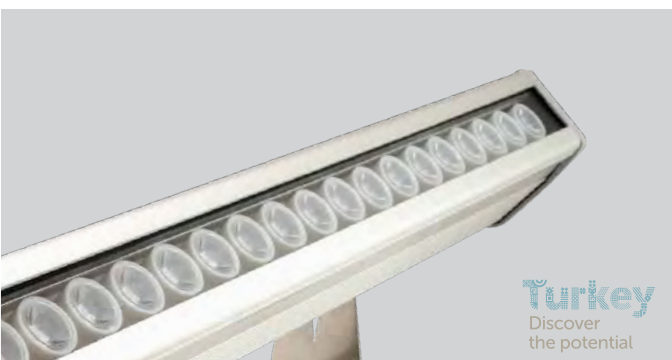

Code	Power	CCT	Std. Angle
AT20-03603	36 W	3000K	30°
AT20-03633	36 W	6500K	30°
AT20-03643	36 W	Red	30°
AT20-03653	36 W	Green	30°
AT20-03663	36 W	Blue	30°
AT20-03673	36 W	Yellow	30°
AT20-03683	36 W	Amber	30°
AT20-03693	36 W	RGB	30°


Qty in Box: 6




It presents functional solutions for different projects by different assembly options with models of various size and type. Aluminium profile body of various dimensions. We can provide unlimited model options with alternative colour temperatures, length and body colour upon order. DALI and emergency kit features can be added optionally.

Technical Specifications

Power Consumption	24 W - 610 mm	36 W / 910 mm	48 W / 1210 mm
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,11 A	0,16 A	0,22 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 PF	0,95 PF	0,95 PF
Driver Efficiency	90%	90%	90%
Lumen/Watt	100 lm/W	100 lm/W	100 lm/W
LED Type	3030 mm	3030 mm	3030 mm
CRI	Ra≥80	Ra≥80	Ra≥80
Lumen	2,400 lm	3,600 lm	4,800 lm
Operating Temp.	-20/+45 °C	-20/+45 °C	-20/+45 °C
IP	IP40	IP40	IP40
Warranty	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours

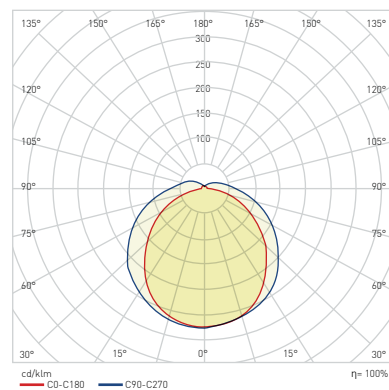


If a sufficient number of orders are made products with natural wood coating can also be produced. Wooden products are made as natural wood coating on the cooler metal parts.

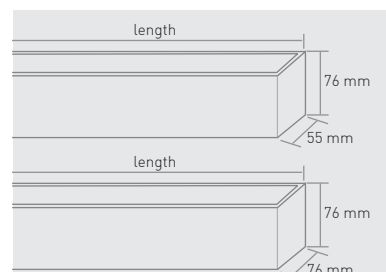


Turkey
Discover
the potential


Single Module

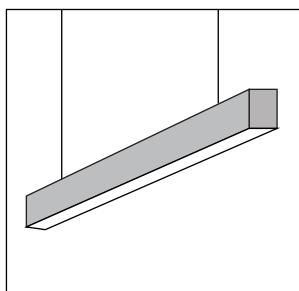


Starting Module




Gap Module




Desistence Module



Horizontal Retrace Module

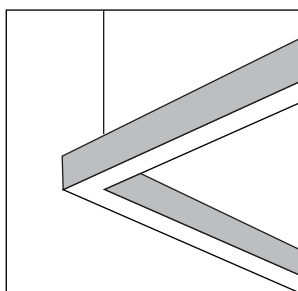

Vertical Rotation Module

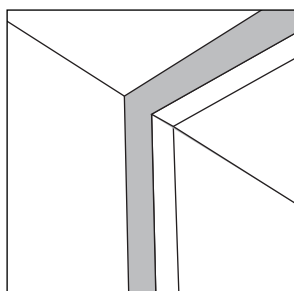

Standard Sizes: 60-90-120 cm
Special sizes are multiples of 5 cm.
For special shapes or addible products, please get information.

Starting Module

90° Horizontal Retrace Module




90°

Vertical Rotation Module





Gap Module

Desistence Module

Special Forms

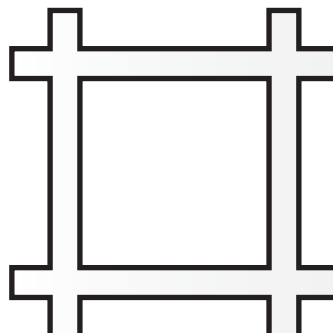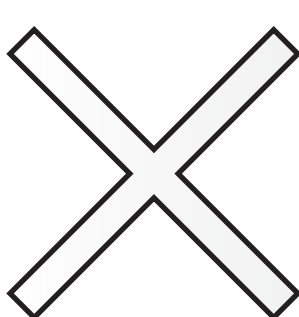

Turkey
Discover
the potential

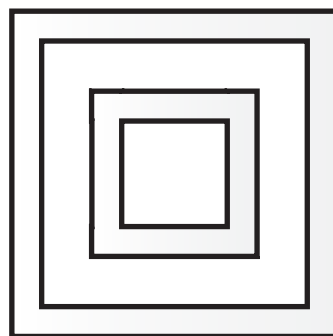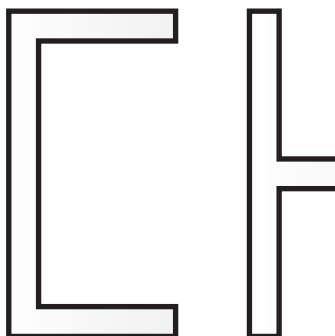

Thanks to the modular structure of the led linear system it is possible to make direct / indirect lighthing on these and many other similar shapes to use on ceilings and walls to install on the ceiling in different ways .

Please get information.



550 mm X 760 mm

Code	Power	CCT	Lumen	Supply Current	Lenght (B)	Body
AL01-00601	24 W	3000K	2400 lm	0,11 A	610 mm	Black
AL01-00611	24 W	4000K	2400 lm	0,11 A	610 mm	Black
AL01-00631	24 W	6500K	2400 lm	0,11 A	610 mm	Black
AL01-00901	36 W	3000K	3600 lm	0,16 A	910 mm	Black
AL01-00911	36 W	4000K	3600 lm	0,16 A	910 mm	Black
AL01-00931	36 W	6500K	3600 lm	0,16 A	910 mm	Black
AL01-01201	48 W	3000K	4800 lm	0,22 A	1210 mm	Black
AL01-01211	48 W	4000K	4800 lm	0,22 A	1210 mm	Black
AL01-01231	48 W	6500K	4800 lm	0,22 A	1210 mm	Black

760 mm X 760 mm

Code	Power	CCT	Lumen	Supply Current	Lenght (B)	Body
AL01-10601	24 W	3000K	2400 lm	0,11 A	610 mm	Black
AL01-10611	24 W	4000K	2400 lm	0,11 A	610 mm	Black
AL01-10631	24 W	6500K	2400 lm	0,11 A	610 mm	Black
AL01-10901	36 W	3000K	3600 lm	0,16 A	910 mm	Black
AL01-10911	36 W	4000K	3600 lm	0,16 A	910 mm	Black
AL01-10931	36 W	6500K	3600 lm	0,16 A	910 mm	Black
AL01-11201	48 W	3000K	4800 lm	0,22 A	1210 mm	Black
AL01-11211	48 W	4000K	4800 lm	0,22 A	1210 mm	Black
AL01-11231	48 W	6500K	4800 lm	0,22 A	1210 mm	Black

Please ask if you need customized quality products such as natural wooden body and so on.

AL01-90002



AL01-90001

**Ceiling Mounting Apparatus**

Code	Explanation
AL01-90001	Suspension Apparatus for LED Linear Luminaires
AL01-90002	Base for LED Linear Luminaires




LED Canopy Luminaires






The body and driver box of aluminium injection material with high heat transmission feature. Painted with electrostatic powder paint resistant to external environment after surface treatments and chrome plating. Sealing gaskets are silicone and are resistant to high temperatures. 4mm tempered sandy glass is able to provide a soft lighting environment by minimizing glare. Special lens options suitable for different canopy heights can be adjusted. Optionally maximum energy saving can be done by external motion sensor and automatic dimming feature after a certain hour of the night.

Technical Specifications

Power Consumption	60 W +/- 5%	75 W +/- 5%	90 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V	AC 220-240 V
Supply Current	0,28 A	0,36 A	0,524 A
Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor Correction	0,98 Pf	0,98 Pf	0,98 Pf
Driver Efficiency	96 %	96 %	96 %
Lumen/Watt	102 lm/W	110 lm/W	109 lm/W
Beam Angle	90°	90°	90°
LED Type	3030	3030	3030
CRI	Ra≥70-80	Ra≥70-80	Ra≥70-80
Lumen	6,100 lm	8,250 lm	9,800 lm
Operating Temp.	-40/+65 °C	-40/+65 °C	-40/+65 °C
Warranty	2 Years	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours	30.000 Hours

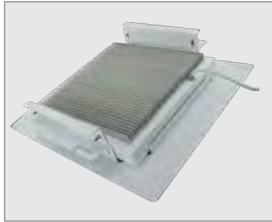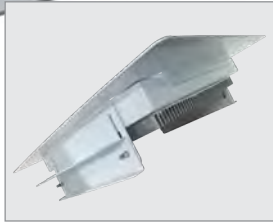

OSRAM LED
LUMILEDS Driver Industry Series
NICHIA Driver
PHILIPS Driver

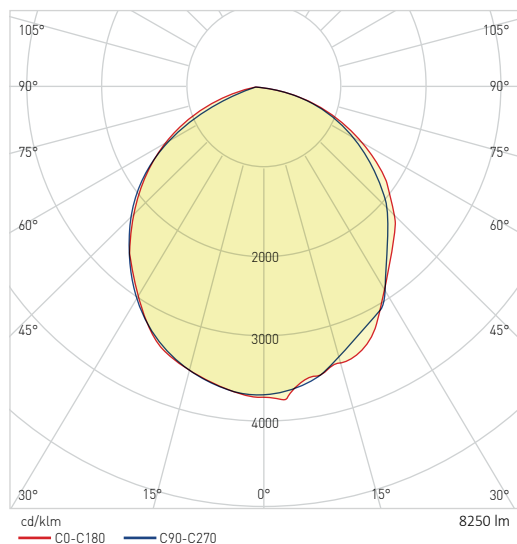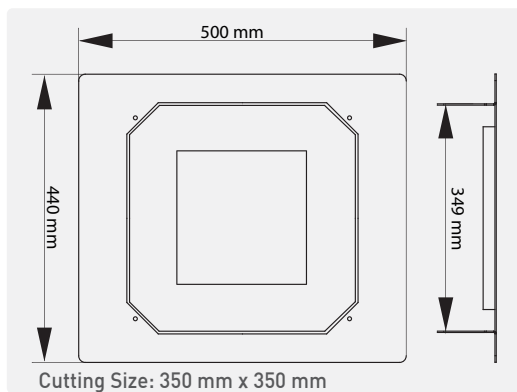

Code	Power	CCT	Lumen
AT38-06000	60 W	3000K	6,000 lm
AT38-06010	60 W	4000K	6,050 lm
AT38-06030	60 W	6500K	6,100 lm
AT38-07500	75 W	3000K	8,100 lm
AT38-07510	75 W	4000K	8150 lm
AT38-07530	75 W	6500K	8,250 lm
AT38-09000	90 W	3000K	9700 lm
AT38-09010	90 W	4000K	9750 lm
AT38-09030	90 W	6500K	9800 lm



Turkey
 Discover
 the potential


LED Waterproof Light

Turkey
Discover
the potential

ABS body and PC diffuser. The clips can be produced of PC or optionally rustproof. FR4 PCB, 2835 package LED and homogeneous light distribution. The diffuser has a high light transmission and standard opal colour. It can also optionally be produced transparent. It is with standard 30 cm cable outlet and has a record IP 65 sealing. It can be produced as 3000- 4000-6500K of 600mm - 1200 mm length. Optionally Dali and emergency kit application can be done. The hanging set is of stainless spring steel two dowels and mounting screw is included in the package.

Technical Specifications

Power Consumption	18 W +/- 5%	36 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	0,09 A	0,18 A
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,95 Pf	0,98 Pf
Driver Efficiency	85 %	90 %
Lumen/Watt	94 lm/W	94 lm/W
Beam Angle	120 °	120 °
LED Type	2835 mm	2835 mm
CRI	Ra≥70	Ra≥70
Lumen	1.715 lm	3.550 lm
Operating Temp.	-20/+45 °C	-20/+45 °C
IP	IP 65	IP 65
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours

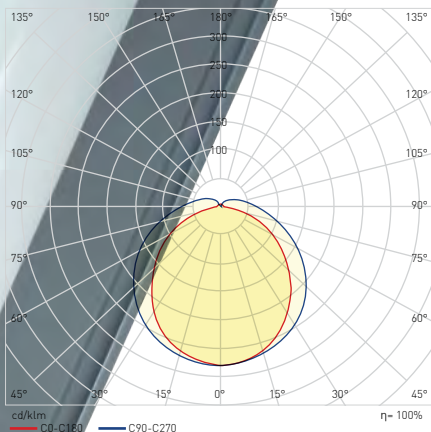

18 W

OSRAM LED

Driver

Code	CCT	Size	Lumen
AT03-00600	3000K	610 mm	1550 lm
AT03-00610	4000K	610 mm	1650 lm
AT03-00630	6500K	610 mm	1715 lm

Qty in Box: 16 Pcs.

36 W

OSRAM LED

Driver

Code	CCT	Size	Lumen
AT03-01200	3000K	1210 mm	3500 lm
AT03-01210	4000K	1210 mm	3520 lm
AT03-01230	6500K	1210 mm	3550 lm

Qty in Box: 12 Pcs.

18 W

OSRAM LED OSRAM Driver

Code	CCT	Size	Lumen
AT03-10600	3000K	610 mm	1550 lm
AT03-10610	4000K	610 mm	1650 lm
AT03-10630	6500K	610 mm	1715 lm

Qty in Box: 16 Pcs.

36 W

OSRAM LED OSRAM Driver

Code	CCT	Size	Lumen
AT03-11200	3000K	1210 mm	3500 lm
AT03-11210	4000K	1210 mm	3520 lm
AT03-11230	6500K	1210 mm	3550 lm

Qty in Box: 12 Pcs.

LED Batten Lights

Merkür LED Batten Lights




4 W

Code	CCT	Lumen
AN10-00400	3000 K	360 lm
AN10-00430	6500 K	380 lm

Length: 313 mm

Input Voltage : 220 V
Power : 4 W
Qty in Box : 30 pcs




7,5 W

Code	CCT	Lumen
AN10-00700	3000 K	630 lm
AN10-00730	6500 K	675 lm

Length: 543 mm

Input Voltage : 220 V
Power : 7,5 W
Qty in Box : 30 pcs

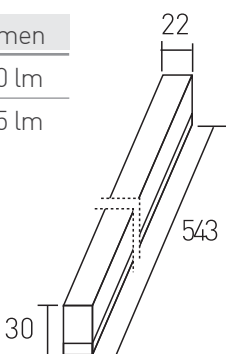


11 W

Code	CCT	Lumen
AN10-01100	3000 K	950 lm
AN10-01130	6500 K	1000 lm

Length: 873 mm

Input Voltage : 220 V
Power : 11 W
Qty in Box : 30 pcs





14 W

Code	CCT	Lumen
AN10-01400	3000 K	1200 lm
AN10-01430	6500 K	1300 lm

Length: 1173 mm

Input Voltage : 220 V
Power : 14 W
Qty in Box : 30 pcs

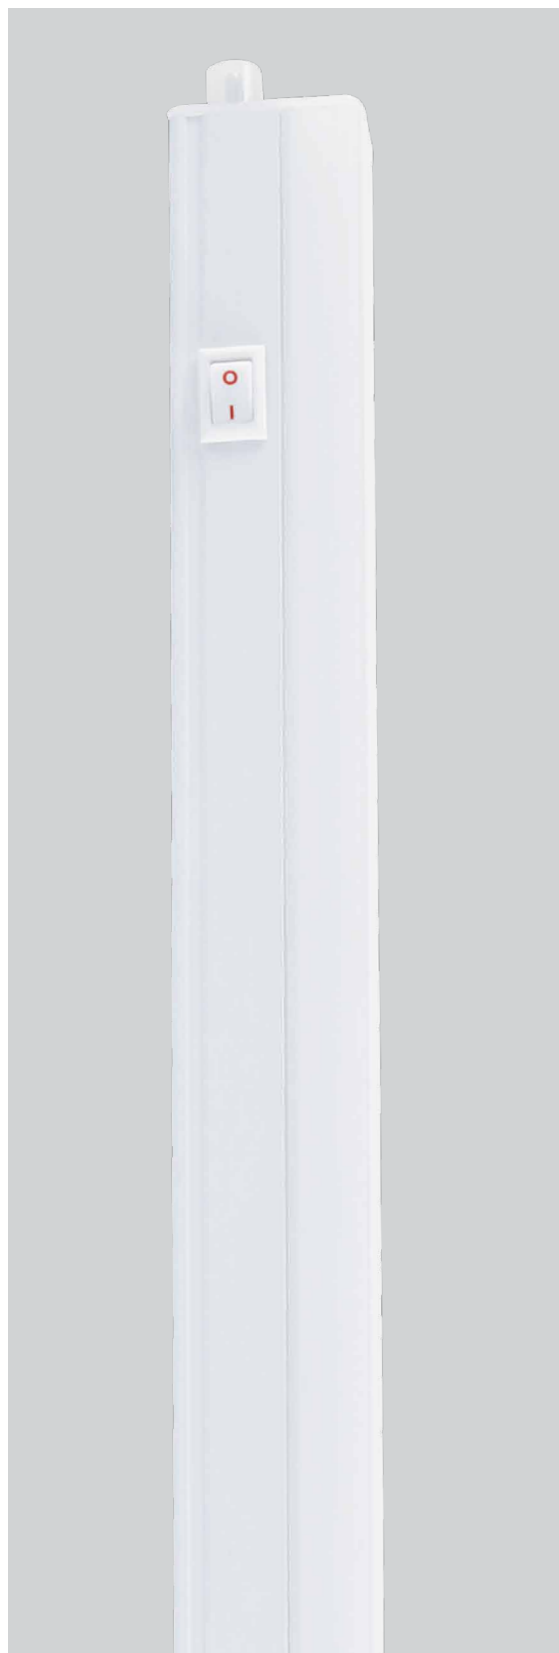

14W Merkür LED Batten Lights with Sensor



Code CCT

AN10-21430 6500 K

Input Voltage : 220 V
Power : 14 W
Lumen : 1360 lm
Qty in Box : 30 pcs

Length:
1173 mm



Neptün LED Batten Lights



Technical Specifications

Supply Input Voltage AC 220-240 V

Frequency	50-60 Hz
Lumen/Watt	80 lm/W
Beam Angle	120 °
LED Type	2835 mm
CRI	Ra≥80
Operating Temp.	-20/+45 °C
IP	IP 20
Warranty	2 Years
LED Lifetime	30.000 Hours

18 W



Code	CCT
AN20-00603	3000 K
AN20-00633	6500 K

Length: 605 mm
Lumen: 1320 lm

36 W


Code	CCT
AN20-01203	3000 K
AN20-01233	6500 K

Length: 1205 mm
Lumen: 2850 lm

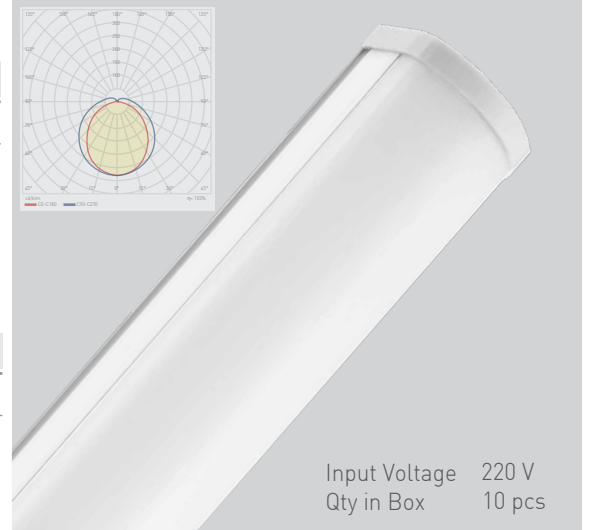

Input Voltage 220 V
Qty in Box 10 pcs

Venüs LED Batten Lights

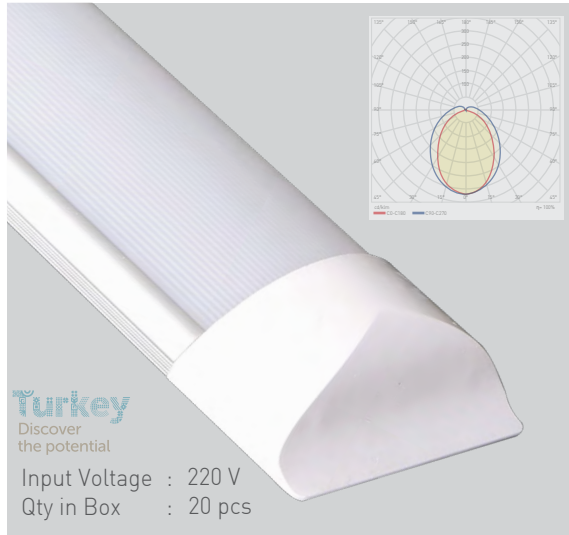

Technical Specifications

Supply Input Voltage AC 220-240 V

Frequency	50-60 Hz
Lumen/Watt	80 lm/W
Beam Angle	120 °
LED Type	2835 mm
CRI	Ra≥80
Operating Temp.	-20/+45 °C
IP	IP 20
Warranty	2 Years
LED Lifetime	30.000 Hours

18 W

Code	CCT
AN18-00603	3000 K
AN18-00633	6500 K


Length: 605 mm
Lumen: 1320 lm

36 W

Code	CCT
AN18-01203	3000 K
AN18-01233	6500 K

Length: 1205 mm
Lumen: 2850 lm

LED Waterproof Lamps




18 W	Code	CCT	Boy	Lumen
	AT01-00630	6500K	600 mm	1715 lm

Input Voltage : 220 V
Qty in Box : 9 pcs

36 W	Code	CCT	Boy	Lumen
	AT01-01230	6500K	1200 mm	3500 lm

Input Voltage : 220 V
Qty in Box : 4 pcs



Uranüs - LED Waterproof Lamps



18 W

Code	CCT	Lumen
AT02-00600	3000 K	1500 lm
AT02-00610	4000 K	1550 lm
AT02-00630	6500 K	1600 lm

Length: 600 mm
Input Voltage : 220 V
Power : 18 W
Qty in Box : 20 pcs

36 W

Code	CCT	Lumen
AT02-01200	3000 K	3000 lm
AT02-01210	4000 K	3100 lm
AT02-01230	6500 K	3200 lm

Length: 1200 mm
Input Voltage : 220 V
Power : 36 W
Qty in Box : 20 pcs

LED Garden Fixtures

Teras 800 - Garden Fixtures



ISO 9001


30,000 hr

IP54

Code	CCT
AG43-03202	3000K

Operating Temp.: -25°C/+50°C

Material: Aluminium




Lumen : 210 lm

Input Voltage 220 V / 50-60 Hz

Power : 7 W

Qty in Box : 4 Pcs

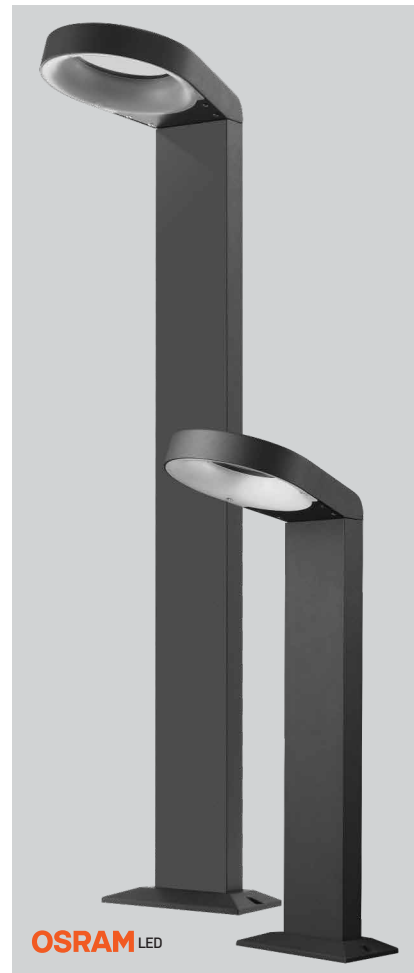

Teras 500 - Garden Fixtures



ISO 9001

30,000 hr

IP54

Code	CCT
AG43-03002	3000K

Operating Temp.: -25°C/+50°C

Material: Aluminium

Lumen : 208 lm

Input Voltage : 220 V / 50-60 Hz

Power : 7 W

Qty in Box : 4 Pcs



Teras 300 - Garden Fixtures



ISO 9001

30,000 hr

IP54

Code	CCT
AG43-02902	3000K

Operating Temp.: -25°C/+50°C


Material: Aluminium

Lumen : 224 lm

Input Voltage : 220 V / 50-60 Hz

Power : 7 W

Qty in Box : 8 Pcs



Teras WLA - Garden Applique



ISO 9001

30,000 hr

IP54

Operating Temp.: -25°C/+50°C
Material: Aluminium


Code	CCT
AG43-02702	3000K

Lumen : 224 lm

Input Voltage 220 V / 50-60 Hz

Power : 7 W

Qty in Box : 8 Pcs



OSRAM LED

LED Garden Fixtures

Dallas 800 - Garden Fixtures




ISO 9001

30.000 hr

IP54



Code	CCT
AG43-02302	3000K
Operating Temp.: -25°C/+50°C	
Material: Aluminium	
Lumen	: 224 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 7 W
Qty in Box	: 4 Pcs



OSRAM LED

Dallas 500 - Garden Fixtures




ISO 9001

30.000 hr

IP54



Code	CCT
AG43-02102	3000K
Operating Temp.: -25°C/+50°C	
Material: Aluminium	
Lumen	: 224 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 7 W
Qty in Box	: 4 Pcs



OSRAM LED

Dallas 300 - Garden Fixtures




ISO 9001

30.000 hr

IP54



Code	CCT
AG43-02002	3000K
Operating Temp.: -25°C/+50°C	
Material: Aluminium	
Lumen	: 224 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 7 W
Qty in Box	: 8 Pcs



OSRAM LED

Dallas WLA - Garden Applique




ISO 9001

30.000 hr

IP54



Code	CCT
AG43-01802	3000K
Operating Temp.: -25°C/+50°C	
Material: Aluminium	
Lumen	: 224 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 7 W
Qty in Box	: 8 Pcs



OSRAM LED



LED Garden Fixtures

Helios 800 - Garden Fixtures



ISO 9001



IP54



Code	CCT
AG43-00502	3000K

Operating Temp.: -25°C/+50°C
Material: Aluminium

Lumen	: 360 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 9 W
Qty in Box	: 4 Pcs



Helios 500 - Garden Fixtures



ISO 9001



IP54



Code	CCT
AG43-00302	3000K

Operating Temp.: -25°C/+50°C
Material: Aluminium

Lumen	: 360 lm
Input Voltage	: 220 V / 50-60 Hz
Power	: 9 W
Qty in Box	: 4 Pcs



Helios WLA - Garden Applique



ISO 9001




IP54



Code	CCT
AG43-00102	3000K

Lumen	: 810 lm
Input Voltage	: 220 V
Power	: 9 W
Qty in Box	: 8 Pcs



Norma A - Garden Applique




Code

AG40-01502

Operating Temp.: -25°C/+50°C
Material: Aluminium

CCT: 3000K
Body: Black
Input Voltage: 220 V / 50-60 Hz
Power: 3,5 W
Lumen: 32 lm
Beam Angle: 120°
Qty in Box: 16 pcs




ISO 9001



IP54

Norma B - Garden Applique


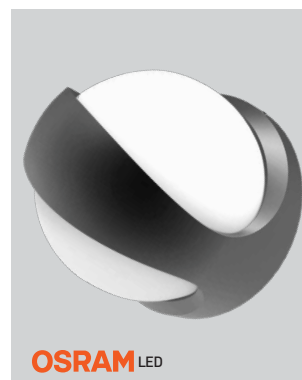


Code

AG40-01402

Operating Temp.: -25°C/+50°C
Material: Aluminium

CCT: 3000K
Body: Black
Input Voltage: 220 V / 50-60 Hz
Power: 13 W
Lumen: 550 lm
Beam Angle: 120°
Qty in Box: 8 pcs



ISO 9001



IP54

LED Garden Fixtures

Norma C - Garden Applique



Code	Body	CCT	
AG40-01302	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Power	: 13 W		
Lumen	: 960 lm		
Beam Angle	: 120°		
Qty in Box	: 8 pcs		

30,000 hr | IP65

75
114
236

Norma D - Garden Applique



Code	Body	CCT	
AG40-01202	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Power	: 10 W		
Lumen	: 435 lm		
Beam Angle	: 120°		
Qty in Box	: 16 pcs		

30,000 hr | IP65

175
201
45

Norma E - Garden Applique



Code	Body	CCT	
AG40-01102	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Power	: 12 W		
Lumen	: 675 lm		
Beam Angle	: 120°		
Qty in Box	: 8 pcs		

30,000 hr | IP65

219
169
55

Tarus WLS Garden Applique with Sensor



Code	Body	CCT	
AG43-01002	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Detection	: 180°		
Power	: 6 W		
Lumen	: 520 lm		
Qty in Box	: 16 Pcs		

30,000 hr | IP65

106mm
250mm

Sirius 2B - Garden Applique




Code	Body	CCT	
AG40-01002	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Power	: 7 W		
Lumen	: 280 lm		
Qty in Box	: 12 Pcs		

30,000 hr | IP54

82mm
43mm
230mm

Sirius B - Garden Applique

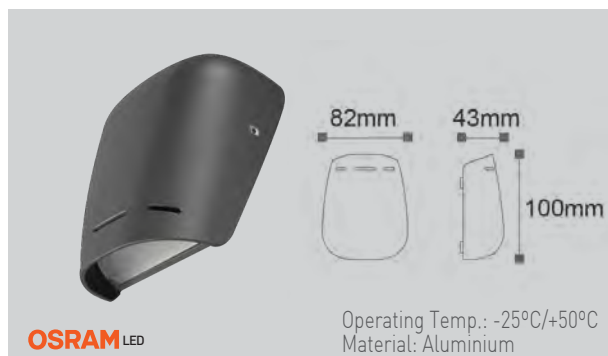

Code	Body	CCT	
AG40-00902	Black	3000K	
Input Voltage	: 220 V / 50-60 Hz		
Power	: 3,5 W		
Lumen	: 140 lm		
Qty in Box	: 18 Pcs		

30,000 hr | IP54

82mm
43mm
100mm

LED Garden Fixtures

Sirius 2A - Garden Applique




Operating Temp.: -25°C/+50°C
Material: Aluminium

Code	Body	CCT
AG40-00802	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 10 W	
Lumen	: 650 lm	
Qty in Box	: 16 pcs	
30,000 hr IP65		

106mm

238mm




Sirius A - Garden Applique




Code	Body	CCT
AG40-00702	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 5 W	
Lumen	: 315 lm	
Qty in Box	: 16 pcs	
 30,000 hr	 IP65	






Pirus B - Garden Applique

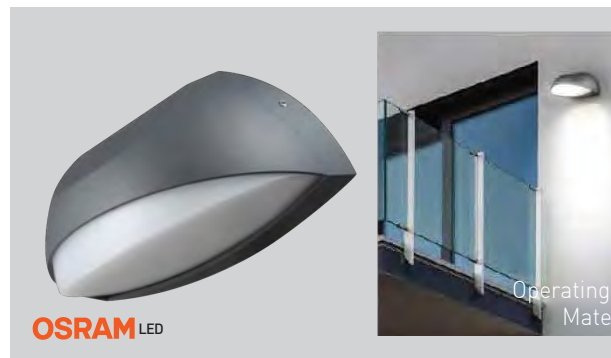

Operating Temp.: -25°C/+50°C
Material: Aluminium


Code	Body	CCT
AG40-00602	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 12 W	
Lumen	: 1020 lm	
Qty in Box	: 8 pcs	
30,000 hr IP65 242mm 149mm 129mm		



Pirus S - Garden Applique



Code	Body	CCT
AG40-00502	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 6 W	
Lumen	: 475 lm	
Qty in Box	: 12 Pcs	
30,000 hr IP65 160mm 100mm 86mm		



Pirus C - Garden Applique



Operating Temp.: -25°C/+50°C
Material: Aluminium

Code	Body	CCT
AG40-00302	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 10 W	
Lumen	: 500 lm	
Qty in Box	: 8 Pcs	
 30,000 hr  IP65		




240mm

120mm



45mm




Pirus A - Garden Applique



Operating Temp.: -25°C/+50°C
Material: Aluminium

Code	Body	CCT
AG40-00102	Black	3000K
Input Voltage	: 220 V / 50-60 Hz	
Power	: 9 W	
Lumen	: 560 lm	
Qty in Box	: 9 Pcs	
 30,000 hr	 IP65	







Garden Fixtures


Hera 800 - Garden Fixtures



Code	Body
AG36-00062	Black

Material: Stainless Steel

Max. Watt : max. 60 W
 Socket : E27
 Qty in Box : 4 Pcs




Hera 500 - Garden Fixtures



Code	Body
AG36-00042	Black

Material: Stainless Steel

Max. Watt : max. 60 W
 Socket : E27
 Qty in Box : 4 Pcs




Hera 300 - Garden Fixtures



Code	Body
AG36-00032	Black

Material: Stainless Steel


Max. Watt : max. 60 W
 Socket : E27
 Qty in Box : 8 Pcs



Hera WLA - Garden Applique



Code
AG36-00012



Max. Watt : max. 60 W
 Socket : E27
 Qty in Box : 8 Pcs
 Material: Stainless Steel

Hera WLS - Garden Applique with Sensor



Code
AG36-00002




Max. Watt : max. 60 W
 Socket : E27
 Qty in Box : 8 Pcs
 Material: Stainless Steel

Garden Fixtures

Ikarus - Garden Fixtures




Code	Body
AG31-00132	Black
Max. Watt	: Max. 60 W
Socket	: E27
Qty in Box	: 6 pcs

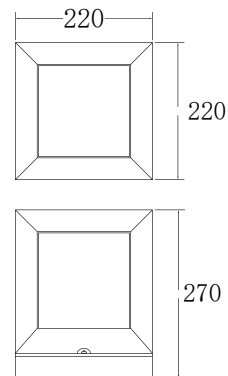

Garden Applique



Code	
AG31-00122	
Max. Watt	: max. 60 W
Socket	: E27
Qty in Box	: 10 Pcs
Body	: Aluminium injection body and high quality polycarbonate material.

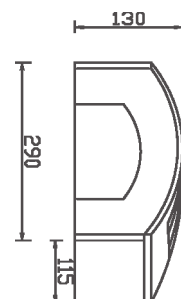

LED Waterproof Garden Fixtures



Code	Power	CCT	Lumen	Qty in Box
AT25-00301	10 W	3000K	800 lm	20 pcs
AT25-00331	10 W	6500K	850 lm	20 pcs
AT25-00351	10 W	Green	-	20 pcs
AT25-00381	10 W	Amber	-	20 pcs


Input Voltage : 220 V
Body Color : Dark Grey



Code	Power	CCT	Lumen	Qty in Box
6604-001	5 W	6500K	450 lm	50 pcs
6604-003	5 W	Green	-	50 pcs
6604-006	9 W	Green	-	20 pcs

Input Voltage : 220 V
Body Color : Dark Grey

LED Tracklight

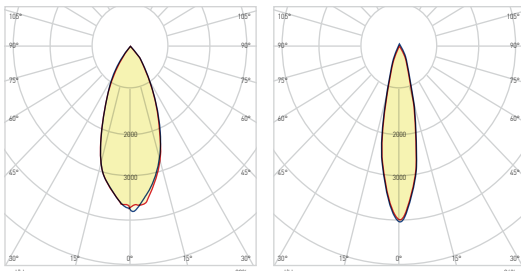

Flicker free

The body and driver box are of aluminium injection material and can be painted to the desired colour with textured electrostatic paint after surface treatments are done. The feeder socket is mono phase as a standard and can be produced as three-phase depending on the request. It is protected by anodized aluminium reflector and 3 mm tempered glass with high light transmission. It has homogeneous light distribution which does not cause hotspot with COB LED technology. It has a standard of 24 and 45 degree angle of outlet special production can be done specific to the project. The fabric textures and colours will look more vibrant and vital with highly efficient LEDs of 3000-4000-5000K 95 and above CRI suitable for store environment.

Technical Specifications

Power Consumption	40 W +/- 5%	50 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	0,19 A	0,38 A
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,98 Pf	0,98 Pf
Driver Efficiency	90 %	90 %
Lumen/Watt	115 lm/W	115 lm/W
Beam Angle	24°-45°	24°-45°
LED Type	COB 19X19 mm	COB 19X19 mm
CCT	3000-4000-6500	3000-4000-6500
CRI	Ra≥80-90	Ra≥80-90
Lumen	4,600 lm	5,750 lm
Operating Temp.	-20/+50 °C	-20/+50 °C
IP	IP 20	IP 20
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours



40W COB LED Tracklight

Code	CCT	Body	Lumen
AD30-14600	3000K	White	4350 lm
AD30-14610	4000K	White	4500 lm
AD30-14630	6500K	White	4600 lm
AD30-14601	3000K	Black	4350 lm
AD30-14611	4000K	Black	4500 lm
AD30-14631	6500K	Black	4600 lm

Input Voltage : 220 V
Power : 40 W
Beam Angle : 24°-45°
Qty in Box : 8 pcs

Turkey
Discover
the potential

50W COB LED Tracklight

Code	CCT	Body	Lumen
AD30-24600	3000K	White	5500 lm
AD30-24610	4000K	White	5600 lm
AD30-24630	6500K	White	5750 lm
AD30-24601	3000K	Black	5500 lm
AD30-24611	4000K	Black	5600 lm
AD30-24631	6500K	Black	5750 lm

Input Voltage : 220 V
Power : 50 W
Beam Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover
the potential



LED Tracklights



The body and driver box are of aluminium injection material and can be painted to the desired colour with textured electrostatic paint after surface treatments are done. The feeder socket is mono phase as a standard and can be produced as three-phase depending on the request. It is protected by anodized aluminium reflector and 3 mm tempered glass with high light transmission. It has homogeneous light distribution which does not cause hotspot with COB LED technology. It has a standard of 24 and 45 degree angle of outlet special production can be done specific to the project. The fabric textures and colours will look more vibrant and vital with highly efficient LEDs of 3000-4000-5000K 95 and above CRI suitable for store environment.

Technical Specifications

Power Consumption	30 W +/- 5%	36 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	0,14 A	0,19 A
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,98 Pf	0,98 Pf
Driver Efficiency	90 %	90 %
Lumen/Watt	115 lm/W ~	115 lm/W ~
Beam Angle	24°-45°	24°-45°
LED Type	COB 19X19 mm	COB 19X19 mm
CCT	3000-4000-6500	3000-4000-6500
CRI	Ra ≥80-90	Ra ≥80-90
Lumen	3,450 lm	4,150 lm
Operating Temp.	-20/+50 °C	-20/+50 °C
IP	IP 20	IP 20
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours

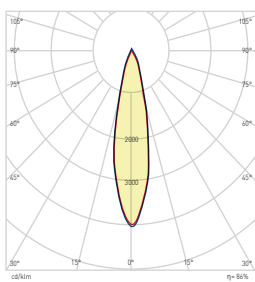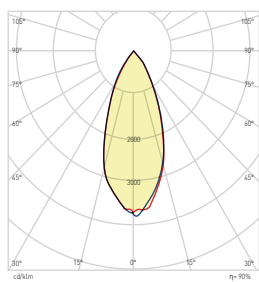

Flicker free

40W COB LED Tracklight



Code	CCT	Body	Lumen
AD30-14700	3000K	White	3300 lm
AD30-14710	4000K	White	3350 lm
AD30-14730	6500K	White	3450 lm
AD30-14701	3000K	Black	3300 lm
AD30-14711	4000K	Black	3350 lm
AD30-14731	6500K	Black	3450 lm

Input Voltage : 220 V
Power : 40 W
Beam Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover the potential

30W COB LED Tracklight - Threephase Socket



Code	CCT	Body	Lumen
AD30-04800	3000K	White	3300 lm
AD30-04810	4000K	White	3350 lm
AD30-04830	6500K	White	3450 lm
AD30-04801	3000K	Black	3300 lm
AD30-04811	4000K	Black	3350 lm
AD30-04831	6500K	Black	3450 lm

Input Voltage : 220 V
Power : 30 W
Beam Angle : 24°-45°
Qty in Box : 12 pcs

Threephase Socket

Turkey
Discover the potential

LED Tracklights

30W COB LED Tracklight

RoHS Compliant | CE | ISO 9001 | 30,000 hr | 24°/45° | IP20



Code	CCT	Body	Lumen
AD30-04500	3000K	White	3300 lm
AD30-04510	4000K	White	3350 lm
AD30-04530	6500K	White	3450 lm
AD30-04501	3000K	Black	3300 lm
AD30-04511	4000K	Black	3350 lm
AD30-04531	6500K	Black	3450 lm

Input
Voltage : 220 V
Power : 30 W
B. Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover the potential

36W COB LED Tracklight

RoHS Compliant | CE | ISO 9001 | 30,000 hr | 24°/45° | IP20



Code	CCT	Body	Lumen
AD30-14800	3000K	White	4000 lm
AD30-14810	4000K	White	4050 lm
AD30-14830	6500K	White	4150 lm
AD30-14801	3000K	Black	4000 lm
AD30-14811	4000K	Black	4050 lm
AD30-14831	6500K	Black	4150 lm

Input
Voltage : 220 V
Power : 36 W
B. Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover the potential

36W COB LED Tracklight

RoHS Compliant | CE | ISO 9001 | 30,000 hr | 24°/45° | IP20



Code	CCT	Body	Lumen
AD30-14500	3000K	White	4000 lm
AD30-14510	4000K	White	4050 lm
AD30-14530	6500K	White	4150 lm
AD30-14501	3000K	Black	4000 lm
AD30-14511	4000K	Black	4050 lm
AD30-14531	6500K	Black	4150 lm

Input
Voltage : 220 V
Power : 36 W
B. Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover the potential

30W COB LED Tracklight

RoHS Compliant | CE | ISO 9001 | 30,000 hr | 24°/45° | IP20



Code	CCT	Body	Lumen
AD30-04000	3000K	White	2500 lm
AD30-04010	4000K	White	2600 lm
AD30-04030	6500K	White	2700 lm
AD30-04001	3000K	Black	2500 lm
AD30-04011	4000K	Black	2600 lm
AD30-04031	6500K	Black	2700 lm

Input
Voltage : 220 V
Power : 30 W
B. Angle : 24°-45°
Qty in Box : 12 pcs

Turkey
Discover the potential

30W COB LED Tracklight



ISO 9001

30,000 hr

45°

IP20



OSRAM LED & DRIVER

2 Years Warranty

Code	Body	CCT	I. Akısı
AD30-11900	White	3000K	3600 lm
AD30-11910	White	4000K	3600 lm
AD30-11930	White	6500K	3600 lm
AD30-11901	Black	3000K	3600 lm
AD30-11911	Black	4000K	3600 lm
AD30-11931	Black	6500K	3600 lm

Input Voltage: 220 V
Power : 30 W
B. Angle : 45°
Qty in Box : 16 pcs



Code	Body	CCT	I. Akısı
AD30-01900	White	3000K	2700 lm
AD30-01910	White	4000K	2700 lm
AD30-01930	White	6500K	2700 lm
AD30-01901	Black	3000K	2700 lm
AD30-01911	Black	4000K	2700 lm
AD30-01931	Black	6500K	2700 lm

2 Years Warranty

Turkey
Discover
the potential

Input Voltage : 220 V
Power : 30 W
Beam Angle : 45°
Qty in Box : 16 pcs

30W COB LED Tracklight



Turkey
Discover
the potential

CCT: 3000K

Code	Body
AD30-01600	White
AD30-01601	Black

2 Years Warranty

Input Voltage : 220 V
Power : 30 W
Lumen : 2700 lm
Beam Angle : 45°
Qty in Box : 12 pcs

RoHS Compliant | **CE** | ISO 9001

12W COB LED Tracklight



Turkey
Discover
the potential

CCT: 3000K

Code	Body
AD30-01700	White
AD30-01701	Black

2 Years Warranty

Input Voltage : 220 V
Power : 12 W
Lumen : 960 lm
Beam Angle : 45°
Qty in Box : 20 pcs

RoHS Compliant | **CE** | ISO 9001

10W COB LED Tracklight

RoHS Compliant | CE | ISO 9001



Body: Black

Code	CCT
AD30-11001	3000K
AD30-11011	4000K
AD30-11031	6500K
2 Years Warranty	
Input Voltage	: 220 V
Power	: 10 W
Lumen	: 700 lm
Beam Angle	: 45°
Qty in Box	: 20 pcs

10W COB LED Tracklight

RoHS Compliant | CE | ISO 9001



Body: White

Code	CCT
AD30-11000	3000K
AD30-11010	4000K
AD30-11030	6500K
2 Years Warranty	
Input Voltage	: 220 V
Power	: 10 W
Lumen	: 700 lm
Beam Angle	: 45°
Qty in Box	: 20 pcs



30W COB LED Tracklight

RoHS Compliant | CE | ISO 9001



Code	CCT
AD30-01301	3000K
2 Years Warranty	
Input Voltage	: 220 V
Power	: 30 W
Lumen	: 2700 lm
Beam Angle	: 45°
Qty in Box	: 12 pcs

32W S/T COB LED Tracklight

RoHS Compliant | CE | ISO 9001



CREE

Code	Body.	CCT
6401-025	White	5000K
2 Years Warranty		
Input Voltage	:	220 V
Power	:	32 W
Lumen	:	2800 lm
Beam Angle	:	45°
Qty in Box	:	12 pcs
 30,000 hr	 45°	 IP20

32W COB LED Tracklight

RoHS Compliant | CE | ISO 9001



CREE

Code	Body.	CCT
6401-017	White	5000K
2 Years Warranty		
Input Voltage	:	220 V
Power	:	32 W
Lumen	:	2800 lm
Beam Angle	:	45°
Qty in Box	:	12 pcs
 30,000 hr  45°  IP20		

32W COB LED Tracklight

RoHS Compliant | CE | ISO 9001



CREE

Code	Body.	CCT
6401-023	Black	5000K
6401-021	White	5000K
2 Years Warranty		
Input Voltage	: 220 V	
Power	: 32 W	
Lumen	: 2800 lm	
Beam Angle	: 45°	
Qty in Box	: 12 pcs	
 30,000 hr  45°  IP20		

Tracklights

GU10 Tracklight




GU10 IP20



Code	Socket	Body
AD90-00050	GU10	White
AD90-00051	GU10	Black

Empty

Input : 220 V
Voltage : GU10
Socket



PAR 30 Tracklight



Code	CCT
AD90-00020	White
AD90-00023	Grey
AD90-00021	Black

Empty

Input Voltage : 220 V
Socket : E27
Qty in Box : 20 pcs



E27 IP20

PAR 30 Tracklight



Code	CCT
1880-005	White
1880-006	Grey
1880-007	Black

Empty

Input Voltage : 220 V
Socket : E27
Qty in Box : 50 pcs



E27 IP20

PAR 30 Tracklight



Code	CCT
1880-004	White
1880-002	Grey
1880-003	Black

Empty

Input Voltage : 220 V
Socket : E27
Qty in Box : 50 pcs



E27 IP20

35-70-150W R/T Metal Ceiling Fixture



Code	CCT
1206-001	White

Empty

Input Voltage : 220 V
Socket : G12
Qty in Box : 12 pcs



355° 150mm x 150mm G12 IP20

35-70-150W R/T Metal Ceiling Fixture



Code	CCT
1206-002	White

Empty

Input Voltage : 220 V
Socket : G12
Qty in Box : 6 pcs



355° 150mm x 300mm G12 IP20

35-70-150W R/T Metal Ceiling Fixture



Code	CCT
1206-003	White

Empty

Input Voltage : 220 V
Socket : G12
Qty in Box : 6 pcs



355° 150mm x 450mm G12 IP20

Tracklights and Accessories

Single Phase Track



Qty in Box: 20 Pcs.



Code	Lenght	CCT
AY40-00110	1 mt	White
AY40-00113	1 mt	Grey
AY40-00111	1 mt	Black
AY40-00120	2 mt	White
AY40-00123	2 mt	Grey
AY40-00121	2 mt	Black
AY40-00130	3 mt	White
AY40-00133	3 mt	Grey
AY40-00131	3 mt	Black

Single Phase Track Live End



Code	CCT
AY40-00210	White
AY40-00213	Grey
AY40-00211	Black

Input Voltage : 220 V
Qty in Box : 300 pcs

Single Phase Track Straight Joiner



Code	CCT
AY40-00240	White
AY40-00243	Grey
AY40-00241	Black

Input Voltage : 220 V
Qty in Box : 300 pcs

Single Phase Track L-Shaped Joiner



Code	CCT
AY40-00230	White
AY40-00233	Grey
AY40-00231	Black

Input Voltage : 220 V
Qty in Box : 200 pcs

Single Phase Track T-Shaped Joiner



Code	CCT
AY40-00250	White
AY40-00253	Grey
AY40-00251	Black

Input Voltage : 220 V
Qty in Box : 200 pcs

Single Phase Track Cross Joiner



Code	CCT
AY40-00260	White
AY40-00263	Grey
AY40-00261	Black

Input Voltage : 220 V
Qty in Box : 200 pcs

Single Phase Track Socket



Code	CCT
AY40-00200	White
AY40-00203	Grey
AY40-00201	Black

Input Voltage : 220 V
Qty in Box : 300 pcs

Single Phase Track Ending Cover



Code	CCT
AY40-00220	White
AY40-00223	Grey
AY40-00221	Black

Qty in Box : 1000 pcs

Three Phase Track



Code	Lenght	CCT
AY40-02020	2 mt	White
AY40-02023	2 mt	Grey
AY40-02021	2 mt	Black
AY40-02030	3 mt	White
AY40-02033	3 mt	Grey
AY40-02031	3 mt	Black
Input Voltage		: 220 V
Qty in Box		: 12 pcs

RoHS Compliant | CE | IP20

Three Phase Track Socket



Code	CCT
AY40-02100	White
AY40-02103	Grey
AY40-02101	Black
Input Voltage	: 220 V
Qty in Box	: 300 pcs

RoHS Compliant | CE | IP20

Three Phase Track Live End



Code	CCT
AY40-02110	White
AY40-02113	Grey
AY40-02111	Black
Input Voltage	: 220 V
Qty in Box	: 300 pcs

RoHS Compliant | CE | IP20

Three Phase Track Straight Joiner



Code	CCT
AY40-02140	White
AY40-02143	Grey
AY40-02141	Black
Input Voltage	: 220 V
Qty in Box	: 500 pcs

RoHS Compliant | CE | IP20

Three Phase Track Cross Joiner



Code	CCT
AY40-02160	White
AY40-02163	Grey
AY40-02161	Black
Input Voltage	: 220 V
Qty in Box	: 200 pcs

RoHS Compliant | CE | IP20

Three Phase Track T-Shaped Joiner



Code	CCT
AY40-02150	White
AY40-02153	Grey
AY40-02151	Black

Input Voltage	: 220 V
Qty in Box	: 200 pcs

RoHS Compliant | CE | IP20

Three Phase Track L-Shaped Joiner



Code	CCT
AY40-02130	White
AY40-02133	Grey
AY40-02131	Black

Input Voltage	: 220 V
Qty in Box	: 100 pcs

RoHS Compliant | CE | IP20

Three Phase Track Ending Cover



Code	CCT
AY40-02120	White
AY40-02123	Grey
AY40-02121	Black
Qty in Box : 1000 pcs	

RoHS Compliant | CE | IP20

LED Gimbal Downlights


30 W LED Gimbal Downlights



The body and driver box are of aluminium injection material and can be painted to the desired colour with textured electrostatic paint after surface treatments are done. The feeder socket is mono phase as a standard and can be produced as three-phase depending on the request. It is protected by anodized aluminium reflector and 3 mm tempered glass with high light transmission. It has homogeneous light distribution which does not cause hotspot with COB LED technology. It has a standard of 24 and 45 degree angle of outlet special production can be done specific to the project. The fabric textures and colours will look more vibrant and vital with highly efficient LEDs of 3000-4000-5000K 95 and above CRI value suitable for store environment.

Technical Specifications

Power Consumption	30 W +/- 5%	36 W +/- 5%
Supply Input Voltage	AC 220-240 V	AC 220-240 V
Supply Current	0,14 A	0,19 A
Frequency	50-60 Hz	50-60 Hz
Power Factor Correction	0,98 Pf	0,98 Pf
Driver Efficiency	90 %	90 %
Lumen/Watt	115 lm/W	115 lm/W
Beam Angle	24°-45°	24°-45°
Led Type	COB 19X19 mm	COB 19X19 mm
CCT	3000-4000-6500	3000-4000-6500
CRI	Ra≥80-90	Ra≥80-90
Lumen	3,450 lm	4,150 lm
Operating Temp.	-20/+50 °C	-20/+50 °C
IP	IP 20	IP 20
Warranty	2 Years	2 Years
LED Lifetime	30.000 Hours	30.000 Hours


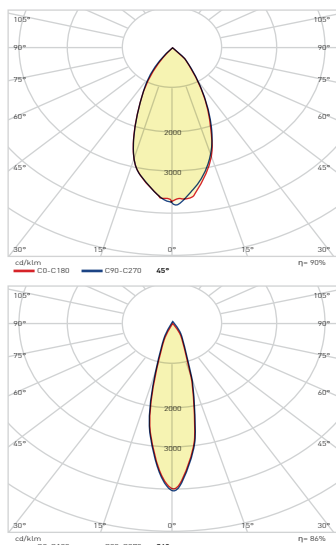


30W COB LED Gimbal Downlights



Code	CCT	Lumen
AD36-00600	3000K	3350 lm
AD36-00610	4000K	3400 lm
AD36-00630	6500K	3450 lm

Input Voltage : 220 V
Power : 30 W
Cutting Size : 150 mm
Beam Angle : 24°-45°
Body Color : White
Qty in Box : 12 pcs





36W COB LED Gimbal Downlights



Code	CCT	Lumen
AD36-01300	3000K	4000 lm
AD36-01310	4000K	4050 lm
AD36-01330	6500K	4150 lm

Input Voltage : 220 V
Power : 36 W
Cutting Size : 145 mm
Beam Angle : 24°-45°
Body Color : White
Qty in Box : 12 pcs



LED Gimbal Downlights

36W COB LED Gimbal Downlights



ISO 9001

30,000 hr

170mm

IP20

OSRAM
LED & DRIVER





2 Years Warranty

Code	CCT	Lumen
AD36-01400	3000K	4000 lm
AD36-01410	4000K	4050 lm
AD36-01430	6500K	4150 lm

Input Voltage : 220 V
Power : 36 W
Cutting Size : 170 mm
Beam Angle : 160°
Qty in Box : 6 pcs

Turkey
Discover
the potential



30W COB LED Gimbal Downlights



ISO 9001

30,000 hr

24°/45°

145mm

IP20





2 Years Warranty

Code	CCT	Lumen
AD36-00300	3000K	2500 lm
AD36-00310	4000K	2600 lm
AD36-00330	6500K	2700 lm

Input Voltage : 220 V
Power : 30 W
Cutting Size : 145 mm
Beam Angle : 24°-45°
Body Color : White
Qty in Box : 12 pcs

Turkey
Discover
the potential



30W COB LED Gimbal Downlights



ISO 9001

30,000 hr

170mm

IP20



2 Years Warranty



Code	CCT	Lumen
AD36-00400	3000K	2400 lm
AD36-00410	4000K	2450 lm
AD36-00430	6500K	2550 lm

Input Voltage : 220 V
Power : 30 W
Cutting Size : 170 mm
Beam Angle : 160°
Qty in Box : 6 pcs

Turkey
Discover
the potential



12W COB LED Gimbal Downlights



ISO 9001

30,000 hr

74mm



IP20

2 Years Warranty



Code	CCT
AD36-00100	3000K
AD36-00130	6500K

Input Voltage : 220 V
Power : 12 W
Lumen : 1020 lm
Cutting Size : 74 mm
Beam Angle : 24°
Qty in Box : 50 pcs



Surface Type LED Wall Appliques

6W LED Wall Applique




ISO 9001

30,000 hr

5°
90°


IP20



Code	Power	CCT	Lumen	Body
AH07-03400	6 W	3000K	480 lm	White
AH07-03401	6 W	3000K	480 lm	Black

Beam Angle: 5°-90°


Input Voltage : 220 V
Qty in Box : 50 Pcs



8W AVVA LED Wall Fixture




Code	Body
AH07-03200	White
AH07-03201	Black



12W AVVA LED Wall Fixture



Code	Body
AH07-03300	White
AH07-03301	Black



2W AVVA LED Wall Fixture



ISO 9001

30,000 hr


35°

IP65




Code	Power	CCT	Lumen	Body
AH07-01400	2 W	3000K	40 lm	Black

Input Voltage : 220 V
Beam Angle : 35°
Qty in Box : 100 pcs



8W AVVA LED Wall Fixture



Code	Body
AH07-03100	White

Lumen : 400 lm
Input Voltage : 220 V
CCT : 3000K
Power : 8 W
Qty in Box : 30 Pcs IP20

8W AVVA LED Wall Fixture



Code	Body
AH07-03000	White
AH07-03001	Black

Lumen : 400 lm
Input Voltage : 220 V
CCT : 3000K
Power : 8 W
Qty in Box : 30 Pcs IP20

3W LED Wall Applique



ISO 9001

30,000 hr

35°


IP65



Code	Power	CCT	Lumen	Body
AH07-04801	3 W	3000K	120 lm	Black

Beam Angle: 5°-90°

Input Voltage : 220 V
Qty in Box : 20 Pcs



Surface Type LED Wall Appliques

3W LED Wall Applique



ISO 9001

30,000 hr

87°

IP65



Code	Power	CCT	Lumen	Body
AH07-04701	3 W	3000K	120 lm	Black

Beam Angle: 87°

Input Voltage : 220 V
Qty in Box : 20 Pcs



12W LED Wall Applique



ISO 9001

30,000 hr

120°


IP65



Code	Power	CCT	Lumen	Body
AH07-04601	12 W	3000K	500 lm	Black

Beam Angle: 120°

Input Voltage : 220 V
Qty in Box : 20 Pcs



12W LED Wall Applique



ISO 9001

30,000 hr

120°

IP65



Code	Power	CCT	Lumen	Body
AH07-04501	12 W	3000K	500 lm	Black

Beam Angle: 120°

Input Voltage : 220 V
Qty in Box : 20 pcs



6W LED Wall Applique



ISO 9001

30,000 hr

24°


IP65



Code	Power	CCT	Lumen	Body
AH07-04401	6 W	3000K	300 lm	Black

Beam Angle: 24°

Input Voltage : 220 V
Qty in Box : 20 Pcs



L: 220 x W: 50 x H: 12 mm

9W LED Wall Applique




ISO 9001

30,000 hr

24°


IP65



Code	Power	CCT	Lumen	Body
AH07-04301	9 W	3000K	400 lm	Black

Beam Angle: 24°

Input Voltage : 220 V
Qty in Box : 40 Pcs



L: 173 x W: 81 x H: 46 mm

Surface Type LED Wall Appliques

2W LED Wall Applique




ISO 9001

30,000 hr

24°

IP65




Code	Power	CCT	Lumen	Body
------	-------	-----	-------	------

AH07-04201	2 W	3000K	60 lm	Black
------------	-----	-------	-------	-------

Beam Angle: 24°

Input Voltage : 220 V

Qty in Box : 50 pcs



2W LED Wall Applique




ISO 9001

30,000 hr

35°

IP65




Code	Power	CCT	Lumen	Body
------	-------	-----	-------	------

AH07-04101	2 W	3000K	60 lm	Black
------------	-----	-------	-------	-------

Beam Angle: 35°

Input Voltage : 220 V

Qty in Box : 50 Pcs



2W LED Wall Applique




ISO 9001

30,000 hr

35°

IP65




Code	Power	CCT	Lumen	Body
------	-------	-----	-------	------

AH07-04001	2 W	3000K	60 lm	Black
------------	-----	-------	-------	-------

Beam Angle: 35°

Input Voltage : 220 V

Qty in Box : 50 Pcs



LED Mirror & Picture Lamp



ISO 9001

30,000 hr

35°

IP20



Code	Power	Body	Code	Power	Body
------	-------	------	------	-------	------

AH10-00107	6 W	Gold	AH10-00307	9 W	Gold
------------	-----	------	------------	-----	------


AH10-00104	6 W	Satin	AH10-00304	9 W	Satin
------------	-----	-------	------------	-----	-------

AH10-00105	6 W	Chrome	AH10-00305	9 W	Chrome
------------	-----	--------	------------	-----	--------

AH10-00110	6 W	Antique	AH10-00310	9 W	Antique
------------	-----	---------	------------	-----	---------

CCT : 3000K


Input Voltage : 220 V



LED Under Cabinet Light



IP20



Code	CCT
------	-----

AH11-00204	3000K
------------	-------

AH11-00234	6500K
------------	-------

Dimensions: 150 mm x 360 mm x 30 mm

Input Voltage : 220 V

Power : 1,5 W


Qty in Box : 48 pcs.

LED, double earted schuko socket and on/off button.

Turkey
Discover
the potential

LED Ceiling and Wall Fixtures

LED Ceiling and Wall Fixture

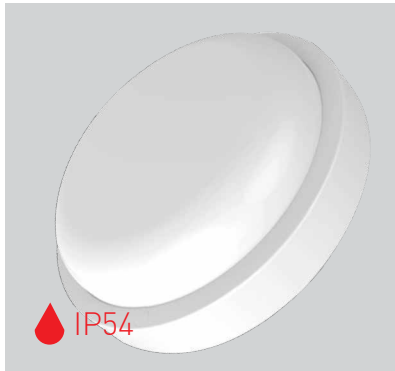

IP54

Code	CCT	Power	Lumen	Qty in Box
AT10-00800	3000K	8 W	600 lm	40 pcs.
AT10-00830	6500K	8 W	600 lm	40 pcs.
AT10-01200	3000K	12 W	900 lm	20 pcs.
AT10-01230	6500K	12 W	900 lm	20 pcs.
AT10-01800	3000K	18 W	1350 lm	20 pcs.
AT10-01830	6500K	18 W	1350 lm	20 pcs.

Input Voltage: 220 V / 50-60 Hz

LED Ceiling and Wall Fixture



IP54

Code	CCT	Power	Lumen	Qty in Box
AT11-00800	3000K	8 W	600 lm	32 pcs.
AT11-00830	6500K	8 W	600 lm	32 pcs.
AT11-01200	3000K	12 W	900 lm	32 pcs.
AT11-01230	6500K	12 W	900 lm	32 pcs.

Input Voltage: 220 V / 50-60 Hz

Surface Type LED Fixture with Microwawe



Turkey
Discover
the potential



SENSOR



Input Voltage : 220 V
Detection Angle : 360°
Qty in Box : 10 pcs

Code	Power	CCT	Body
AC16-00130	18 W	6500 K	White
AC16-00131	18 W	6500 K	Black
AC16-00134	18 W	6500 K	Red
AC16-00135	18 W	6500 K	Green
AC16-00136	18 W	6500 K	Blue
AC16-00137	18 W	6500 K	Yellow
AC16-00138	18 W	6500 K	Orange

Code	Power	CCT	Body
AC16-00100	18 W	3000 K	White

LED Ceiling and Wall Fixtures


12W Carina LED Ceiling and Wall Fixture



ISO 9001

30,000 hr

IP65




Code	Body	Power	CCT	Lumen
AG39-00101	Black-Round	12 W	3000K	900 lm

Beam Angle: 150°

Input Voltage : 220 V
Qty in Box : 20 Pcs



Ø 169 mm X h 100 mm




12W Carina LED Ceiling and Wall Fixture



ISO 9001

30,000 hr

IP65




Code	Body	Power	CCT	Lumen
AG39-00201	Black-Square	12 W	3000K	900 lm

Beam Angle: 150°

Input Voltage : 220 V
Qty in Box : 20 Pcs



160 mm X h 100 mm




18W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-21801	18 W	3000K	595 lm	Black

Beam Angle: 100°

Dimensions: Ø 230 mm X h 78 mm

Material: PP Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 20 Pcs



Ø 230 mm X h 78 mm




18W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-31831	18 W	6500K	850 lm	Black

Beam Angle: 100°

Dimensions: Ø 230 mm X h 79 mm

Material: PP Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 20 Pcs



Ø 230 mm X h 79 mm




18W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-41801	18 W	3000K	1020 lm	Black

Beam Angle: 100°

Dimensions: Ø 230 mm X h 79 mm

Material: PP Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 20 Pcs



Ø 230 mm X h 79 mm



18W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-51831	18 W	6500K	1190 lm	Black

Beam Angle: 100°
Dimensions: Ø 230 mm X h 73 mm
Material: PP Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 20 Pcs



Ø 230 mm X h 73 mm



18W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP54



Code	Power	CCT	Lumen	Body
AT11-11800	18 W	3000K	1190 lm	White
AT11-11830	18 W	6500K	1275 lm	White

Beam Angle: 100°
Dimensions: 190 mm x 190 mm x 55 mm
Material: PP Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 24 pcs



190 mm X h 55 mm



11W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT11-31100	11 W	3000K	700 lm	White

Beam Angle: 100°
Dimensions: 190 mm x 113 mm x 42 mm
Material: ABS Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 24 Pcs



190 mm X 113 mm X h 42 mm



15W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-11500	15 W	3000K	980 lm	White

Beam Angle: 100°
Dimensions: Ø 190 mm X h 45 mm
Material: ABS Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 24 Pcs



Ø 190 mm X h 45 mm



15W LED Ceiling and Wall Fixture



ISO 9001

25,000 hr

IP65



Code	Power	CCT	Lumen	Body
AT10-21500	15 W	3000K	980 lm	White

Beam Angle: 100°
Dimensions: 190 mm x 190 mm x 45 mm
Material: ABS Body + PC OPAL Cover

Input Voltage : 220 V
Qty in Box : 24 Pcs



190 mm X h 45 mm



LED Spotlights

3W Recessed Type LED Spotlights



	Code	CCT
White Body	AH07-01700	3000K
	AH07-01710	4000K
	AH07-01730	6500K
Black Body	AH07-01701	3000K
	AH07-01711	4000K
	AH07-01731	6500K

Lumen : 210 lm
Cutting Size : 30 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 30mm | IP20

3W Recessed Type LED Spotlights



	Code	CCT
White Body	AH06-00100	3000K
	AH06-00110	4000K
	AH06-00130	500K
Black Body	AH06-00101	3000K
	AH06-00111	4000K
	AH06-00131	6500K

Lumen : 210 lm
Cutting Size : 30 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 30mm | IP20



2,5 W Recessed Type LED Spotlights

Code	CCT
AH07-01204	3000K
AH07-01234	6500K

Input Voltage : 220 V
Power : 2,5 W
Lumen : 210 lm
Cutting Size : 55 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 55mm | IP20

3W Recessed Type LED Spotlights



	Code	CCT
White Gov.	AH06-00300	3000K
	AH06-00310	4000K
	AH06-00330	6500K
Black Gov.	AH06-00301	3000K
	AH06-00311	4000K
	AH06-00331	6500K

Lumen : 210 lm
Cutting Size : 35 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 35mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH06-00304	3000K
AH06-00334	6500K
AH06-00354	Green
AH06-00364	Blue

Input Voltage : 220 V
Power : 3 W
Lumen : 210 lm
Cutting Size : 35 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 35mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH06-00204	3000K
AH06-00234	6500K

Input Voltage : 220 V
Power : 3 W
Lumen : 210 lm
Cutting Size : 25 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 25mm | IP20

1W Recessed Type LED Spotlights




Code	CCT
AH06-00500	3000K
AH06-00530	6500K

Input Voltage : 220 V
Power : 1 W
Lumen : 70 lm
Cutting Size : 25 mm
Qty in Box : 100 pcs

RoHS compliant | CE | 25mm | IP20

LED Spotlights

1W Recessed Type LED Spotlights



Code	CCT
AH07-01403	3000K
Lumen: 60 lm	
Input Voltage	: 220 V
Power	: 1 W
Cutting Size	: 40 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 40mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH07-00100	3000K
AH07-00130	6500K
Input Voltage	: 220 V
Power	: 3 W
Lumen	: 210 lm
Cutting Size	: 40 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 40mm | IP20

3W Recessed Type LED Spotlights



Code	CCT	I. Akisi
AH07-01304	3000K	180 lm
AH07-01334	6500K	210 lm
AH07-01344	Redi	120 lm
AH07-01354	Green	120 lm
AH07-01364	Blue	90 lm
Input Voltage	: 220 V	
Power	: 3 W	
Cutting Size	: 25 mm	
Qty in Box	: 100 pcs	

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH05-00204	3000K
Lumen: 190 lm	
Input Voltage	: 220 V
Power	: 3 W
Cutting Size	: 25 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH05-00403	3000K
Lumen: 180 lm	
Input Voltage	: 220 V
Power	: 3 W
Cutting Size	: 25 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH05-00603	3000K
Lumen: 180 lm	
Input Voltage	: 220 V
Power	: 3 W
Cutting Size	: 25 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH05-00503	3000K
AH05-00533	6500K
Lumen: 190 lm	
Input Voltage	: 220 V
Power	: 3 W
Cutting Size	: 25 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights




Code	CCT
AH05-00703	3000K
Lumen: 180 lm	
Input Voltage	: 220 V
Power	: 3 W
Cutting Size	: 25 mm
Qty in Box	: 100 pcs

RoHS Compliant | CE | 25mm | IP20

LED Spotlights

3W Recessed Type LED Spotlights




Code	CCT
AH05-00803	3000K
AH05-00833	6500K
AH05-00843	Red
AH05-00853	Green
AH05-00863	Blue

Lumen: 190 lm

Input Voltage : 220 V
Power : 3 W
Cutting Size : 25 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH06-00906	3000K
AH06-00936	6500K

Lumen: 190 lm

Input Voltage : 220 V
Power : 3 W
Cutting Size : 35 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 35mm | IP20

2W Recessed Type LED Spotlights



Code	CCT
AH06-01004	3000K
AH06-01034	6500K

Lumen: 130 lm

Input Voltage : 220 V
Power : 2 W
Cutting Size : 25 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 25mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH06-01200	3000K
AH06-01230	6500K

Lumen: 190 lm

Input Voltage : 220 V
Power : 3 W
Cutting Size : 35 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 35mm | IP20

3W Recessed Type LED Spotlights




Code	CCT
AH07-01500	3000K

Lumen: 180 lm

Input Voltage : 220 V
Power : 3 W
Cutting Size : 53 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 53mm | IP20

3W Recessed Type LED Spotlights



Code	CCT
AH07-01600	3000K

Lumen: 180 lm

Input Voltage : 220 V
Power : 3 W
Cutting Size : 53 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 53mm | IP20

1W Recessed Type LED Spotlights



Code	CCT
AH06-00403	3000K
AH06-00433	6500K

Input Voltage : 220 V
Power : 1 W
Lumen : 70 lm
Cutting Size : 25 mm
Qty in Box : 100 pcs

RoHS Compliant | CE | 25mm | IP20

5W Surface Type LED Spotlights



Code	CCT
AH06-00730	6500K

Size: 80 mm x 50 mm x 40 mm

Input Voltage : 220 V
Power : 5 W
Lumen : 350 lm
Qty in Box : 50 pcs

RoHS Compliant | CE | IP20

Controllers

Remote Controller for Chandelier



Code	Type
AY30-00110	2 way
AY30-00120	3 way
AY30-00140	4 way
AY30-00160	6 way

RF wireless control - Overload Protection
Unique Frequency
Input Voltage: 220 V
Power : 100 W (Incandescent)
: 200 W (Energy Saver)
Qty in Box : 50 pcs

RoHS Compliant | CE | IP20

RGB Controller



Code
AY30-01120
Input Voltage : 12 V DC
Power : 180 W
Supply Current : 15 A
Qty in Box : 30 pcs

RoHS Compliant | CE | IP20

RGB Controller



Code
AY30-01110
Input Voltage 12 V DC
Power 180 W
Supply Current 15 A
Qty in Box 50 pcs

RoHS Compliant | CE | IP20

RGB Controller



Code
AY30-01130
Input Voltage 12 V DC
Power 72 W
Supply Current 6 A
Qty in Box 100 pcs

RoHS Compliant | CE | IP20

RGB Signal Extender



Code
AY30-01010
Input Voltage 12 V DC
Power 144 W
Supply Current 12 A
Qty in Box 100 pcs

RoHS Compliant | CE | IP20

Timers and Other Products

W Automat Type Mechanical Timer



Code
AY26-00010
Reserves
Qty in Box 100 pcs

RoHS Compliant | CE | IP20

Mechanical Timer with Plug



Code
AY26-00020
Qty in Box 48 pcs

RoHS Compliant | CE | IP20

GZ10 Ceramic Socket



Code
AY25-00110
with 15 cm cable
Qty in Box: 1000 pcs

RoHS Compliant | CE | IP20

PVC Insulation Tape




Code	CCT
AY90-00100	White
AY90-00101	Black
AY90-00102	Grey
AY90-00104	Red
AY90-00105	Green
AY90-00106	Blue
AY90-00107	Yellow

RoHS Compliant | CE | IP20

Dimensions: 0,13 mmX19 mmX10 mm
Qty in Box: 500 pcs

LED Emergency Signs

LED Emergency Signs

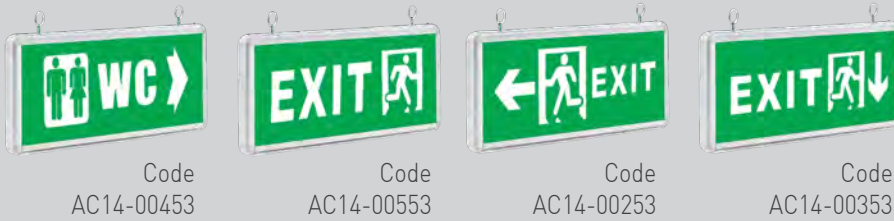

Input Voltage 220 V
Power : 1 W
Qty in Box : 20 pcs
Features : LED, Battery with 3 hours emergency duration, Double sided.




Code

AC14-01000

Input Voltage : 220 V
Power : 1 W
Qty in Box : 20 pcs
Features : LED, Battery with 3 hours emergency duration, Double sided.

There is no EXIT sticker in boxes.

Please inform what sticker you need during placing the order.

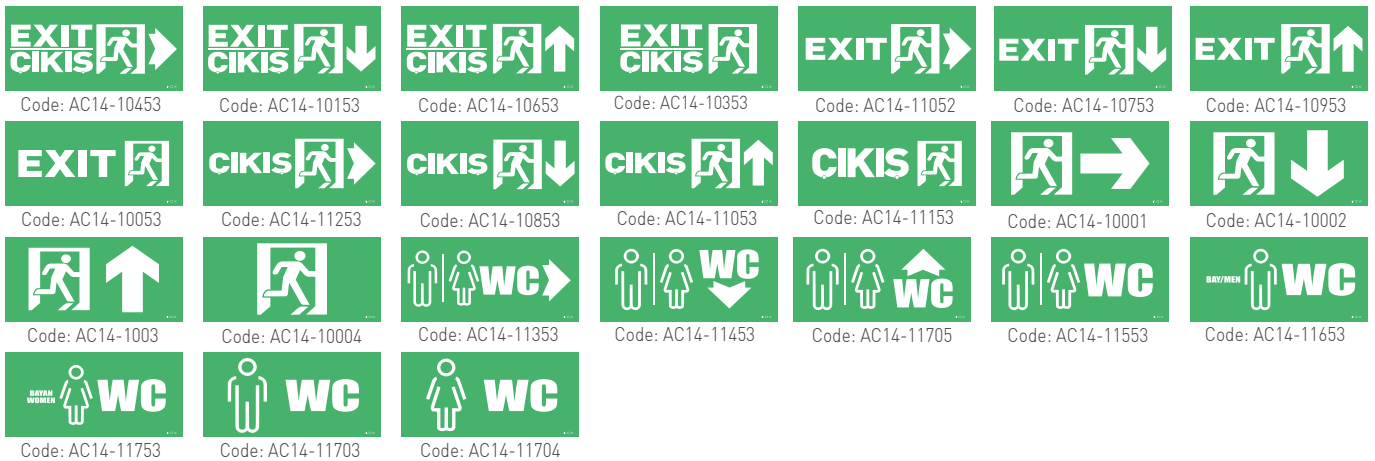

Rechargeable Battery Units for Luminaires with LED Bulb.



Code

AC15-00609

Input : AC 85-265V / 50-60 Hz
Output : 3W
Battery : Lithium 3,7 V 2200 mAh
Qty in Box : 50 pcs.
Features : 2 Hours working time

Rechargeable Battery Units for Luminaires with LED Bulb.

RoHS compliant CE IP30



Code	Lamp	Time	Battery	Weight	Power	Dimensions
AC15-61312	12V LED Lamp	60 min.	3 cell AA size	0,28 kg	1,5 W	17,5 cm x 3,3 cm x 2,5 cm
AC15-63312	12V LED Lamp	180 min.	3 cell SC size	0,38 kg	1,5 W	17,5 cm x 3,3 cm x 2,5 cm
AC15-61609	220V LED Lamp	60 min.	5 cell SC size	0,45 kg	3,5 W	23,8 cm x 3,5 cm x 2,8 cm
AC15-62609	220V LED Lamp	120 min.	3 cell D size	0,75 kg	3,5 W	23,8 cm x 3,5 cm x 2,8 cm

Input Voltage : 220-240 V
Working Status : Lights on power outage
Type of Use : Integrated
IP : 30

Turkey
Discover
the potential

Emergency Lamps

Rechargeable LED Emergency Lamp with 30 LED



Code

AC01-00130

205 mm x 65 mm x 36 mm

Input Voltage : 220 V
Power : 3 W max
Battery : 4 V/2,0 Ah
Qty in Box : 20 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 60 LED



Code

AC01-00330

360 mm x 65 mm x 36 mm

Input Voltage : 220 V
Power : 6 W max,
Battery : 2x4 V/2,0 Ah
Qty in Box : 20 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 90 LED



Code

AC01-00430

500 mm x 65 mm x 36 mm

Input Voltage : 220 V
Power : 9 W max,
Battery : 2x4 V/2,0 Ah
Qty in Box : 15 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 48 LED



Code

AC01-00530

Input Voltage : 220 V
Power : 5 W max,
Battery : 3,7 V/2,0 Ah
Qty in Box : 40 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 48 LED



Code

AC04-00134

Input Voltage : 220 V
Power : 8 W max
Battery : 3,7 V/2,0 Ah
Qty in Box : 8 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 24 LED



Code

AC04-00234

Input Voltage : 220 V
Power : 8 W max,
Battery : 2x4 V/2,4 Ah
Qty in Box : 20 Pcs

RoHS Compliant | CE | IP20

Rechargeable LED Emergency Lamp with 28 LED



Code

AC02-00430

Input Voltage : 220 V
Power : 4 W max,
Battery : 6 V/4,5 Ah
Qty in Box : 10 Pcs

RoHS Compliant | CE | IP20

Sensors

180° Wall Mount Motion Sensor



Code

AY31-01030

Input Voltage : 220 V
Detection Angle : 180°
Qty in Box : 50 pcs

RoHS Compliant | CE | 180° | IP20

360° Wall Mount Motion Sensor



Code

AY31-01010

Input Voltage : 220 V
Detection Angle : 360°
Qty in Box : 50 pcs

RoHS Compliant | CE | 360° | IP20

Microwave Motion Sensor



Code

AY31-02010

Input Voltage : 220 V
Detection Angle : 360°
Qty in Box : 100 pcs

RoHS Compliant | CE | 360° | IP20

360° R/T Ceiling Motion Sensor



Code

AY31-01040

Input Voltage : 220 V
Cutting size : 65 mm
Detection Angle : 360°
Qty in Box : 100 pcs

RoHS Compliant | CE | 360° | IP20

Mini Motion Sensor



Code

AY31-01050

RF wireless control
Overload Protection
Unique Frequency

Input Voltage : 220 V
Detection Angle : 100°
Qty in Box : 100 pcs

RoHS Compliant | CE | 100° | IP20



Wireless Remote Control Doorbells

Wireless Remote Control Doorbell



Code

AY30-02006

Qty in Box : 60 Pcs
Features : 32 Melodies
Detect. Dist : 100 m.

RoHS Compliant | CE | IP20

Wireless Remote Control Doorbell



Code

AY30-02019

Qty in Box : 60 Pcs
Features : 32 Melodies
Detect. Dist : 100 m.

RoHS Compliant | CE | IP20

Wireless Remote Control Doorbell



Code

AY30-02021

Qty in Box : 60 Pcs
Features : 32 Melodies
Detect. Dist : 100 m.

RoHS Compliant | CE | IP20

LED Bulbs


LED Candle Bulb



RoHS Compliant | CE | ISO 9001 | 30,000 hr

Code	Power	CCT	Lumen	Socket	Qty in Box
AA09-00510	5W	3000K	375 lm	E14	100 pcs.
AA09-00513	5W	6500K	400 lm	E14	100 pcs.
AA09-00610	6,5W	3000K	525 lm	E14	100 pcs.
AA09-00613	6,5W	6500K	560 lm	E14	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz




LED Bulb



RoHS Compliant | CE | ISO 9001 | 30,000 hr

Code	Power	CCT	Lumen	Socket	Qty in Box
AA11-00510	5 W	3000K	400 lm	E14	100 pcs.
AA11-00513	5 W	6500K	450 lm	E14	100 pcs.
AA11-00520	5 W	3000K	400 lm	E27	100 pcs.
AA11-00523	5 W	6500K	450 lm	E27	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz




LED A60 Bulb



RoHS Compliant | CE | ISO 9001 | 30,000 hr

Code	Power	CCT	Lumen	Socket	Qty in Box
AA13-00920	9W	3000K	675 lm	E27	100 pcs.
AA13-00921	9W	4000K	700 lm	E27	100 pcs.
AA13-00923	9W	6500K	720 lm	E27	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz




LED A60 Bulb



RoHS Compliant | CE | ISO 9001 | 30,000 hr

Code	Power	CCT	Lumen	Socket	Qty in Box
AA13-01220	12W	3000K	900 lm	E27	100 pcs.
AA13-01221	12W	4000K	930 lm	E27	100 pcs.
AA13-01223	12W	6500K	960 lm	E27	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz




LED A70 Bulb



RoHS Compliant | CE | ISO 9001 | 30,000 hr

Code	Power	CCT	Lumen	Socket	Qty in Box
AA13-01520	15W	3000K	1125 lm	E27	100 pcs.
AA13-01521	15W	4000K	1180 lm	E27	100 pcs.
AA13-01523	15W	6500K	1200 lm	E27	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz



LED Bulbs

LED T80-T100-T120-T140-T160 Bulb




ISO 9001

30,000 hr



Code	Type	Power	CCT	Lumen	Socket	Qty in Box
AA13-02020	T80	20W	3000K	1800 lm	E27	50 pcs.
AA13-02023	T80	20W	6500K	1800 lm	E27	50 pcs.
AA13-03020	T100	30W	3000K	2700 lm	E27	30 pcs.
AA13-03023	T100	30W	6500K	2700 lm	E27	30 pcs.
AA13-04020	T120	40W	3000K	3600 lm	E27	30 pcs.
AA13-04023	T120	40W	6500K	3600 lm	E27	30 pcs.
AA13-05020	T140	50W	3000K	4500 lm	E27	20 pcs.
AA13-05023	T140	50W	6500K	4500lm	E27	20 pcs.
AA13-06020	T160	60W	3000K	5400 lm	E27	20 pcs.
AA13-06023	T160	60W	6500K	5400lm	E27	20 pcs.

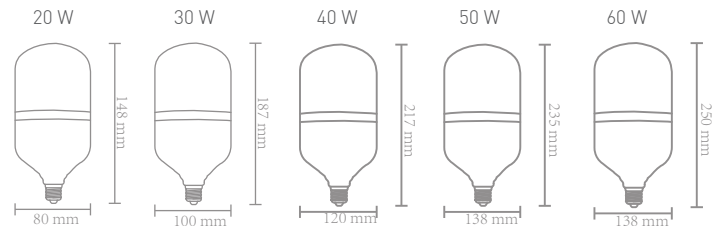

Input Voltage: 220 V
Frequency: 50/60 Hz

Dimmable LED A60 Bulb




ISO 9001

30,000 hr



Code	Power	CCT	Lumen	Socket	Qty in Box
AA14-01020	10 W	3000K	900 lm	E27	100 pcs.
AA14-01023	10 W	6500K	900 lm	E27	100 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz



LED Bulb with Battery




ISO 9001

30,000 hr



Input Voltage: 220 V
Frequency: 50/60 Hz



LED Bulb with Radar Sensor




ISO 9001

30,000 hr



Input Voltage: 220 V
Frequency: 50/60 Hz



LED Capsules

2,2 W LED Capsules



ISO 9001



Code	Type	Power	CCT	Lumen	Socket	Qty in Box
AA29-00390	Capsule	2,2 W	3000K	180 lm	G9	500 pcs.
AA29-00393	Capsule	2,2 W	6500K	185 lm	G9	500 pcs..


11 mm x 48 mm x 16,5 mm

Input Voltage: 220 V
Frequency: 50/60 Hz

1,6 W LED Capsules



ISO 9001



Code	Type	Power	CCT	Lumen	Socket	Qty in Box
AA29-30340	Capsule	1,6 W	3000K	128 lm	G4	500 pcs.
AA29-30343	Capsule	1,6 W	6500K	130 lm	G4	500 pcs.

42 mm x 15,6 mm x 15,6 mm

Input Voltage: AC/DC 12 V

2,3 W LED Capsules



ISO 9001



Code	Type	Power	CCT	Lumen	Socket	Qty in Box
AA29-30440	Capsule	2,3 W	3000K	180 lm	G4	500 pcs.
AA29-30443	Capsule	2,3 W	6500K	185 lm	G4	500 pcs..

11 mm x 48 mm x 16,5 mm

Input Voltage: AC/DC 12 V

3,2 W LED Capsules



ISO 9001



Code	Type	Power	CCT	Lumen	Socket	Qty in Box
AA29-00410	Capsule	3,2 W	3000K	300 lm	E14	500 pcs.
AA29-00413	Capsule	3,2 W	6500K	300 lm	E14	500 pcs.

54 mm x 15,6 mm x 15,6 mm

Input Voltage: 220 V
Frequency: 50/60 Hz

2,3 W LED Capsules



ISO 9001



Code	CCT
AA29-00440	3000K



42 mm x 15,6 mm x 15,6 mm

Input Voltage: 220 V - 50/60 Hz
Socket: G4
Lumen: 270 lm
Qty in Box: 50 pcs.

1 W LED Capsules



ISO 9001



Code	CCT
AA29-00140	3000K

9,5 mm x 9,5 mm x 36,9 mm

Input Voltage: 220 V - 50/60 Hz
Socket: G4
Lumen: 100 lm
Qty in Box: 1000 pcs.

Special LED Bulbs

14W LED AR111 Bulb



ISO 9001

30,000 hr



Code	Power	CCT	Lumen	Socket	Qty in Box
AA32-31420	14 W	3000K	950 lm	G53	20 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz

COB PAR-30 Spot Bulb



ISO 9001

30,000 hr



Code	Power	CCT	Lumen	Socket	Qty in Box
AA31-81420	14W	3000K	950 lm	E27	40 pcs.

Input Voltage: 220 V
Frequency: 50/60 Hz

SMD LED Bulb



ISO 9001

30,000 hr



Code	Power	CCT	Lumen	Socket	Qty in Box
AA24-00560	5W	3000K	425 lm	G5.3	100 pcs.
AA24-00563	5W	6500K	425 lm	G5.3	100 pcs.

Input Voltage: 220 V Frequency: 50/60 Hz

SMD LED Bulb



ISO 9001

30,000 hr



Code	Power	CCT	Lumen	Socket	Qty in Box
AA24-00550	5W	3000K	425 lm	GU10	100 pcs.
AA24-00553	5W	6500K	425 lm	GU10	100 pcs.
AA24-00750	7W	3000K	595 lm	GU10	100 pcs.
AA24-00753	7W	6500K	595 lm	GU10	100 pcs.

Input Voltage: 220 V Frequency: 50/60 Hz

**9 W LED Tube**

Code	CCT	Lumen
AA52-00680	3000K	720 lm
AA52-00681	4000K	720 lm
AA52-00683	6500K	720 lm
AA52-00684	Red	-
AA52-00685	Green	-
AA52-00686	Blue	-

Length: 600 mm

Input Voltage : 220 V
 Power : 9 W
 Socket : G13
 Qty in Box : 25 pcs

18 W LED Tube

Code	CCT	Lumen
AA52-01280	3000K	1440 lm
AA52-01281	4000K	1440 lm
AA52-01283	6500K	1440 lm
AA52-01284	Red	-
AA52-01285	Green	-
AA52-01286	Blue	-

Length: 1200 mm

Input Voltage : 220 V
 Power : 18 W
 Socket : G13
 Qty in Box : 25 pcs

24 W LED Tube

Code	CCT	Lumen
AA52-01580	3000K	1920 lm
AA52-01581	4000K	1920 lm
AA52-01583	6500K	1920 lm

Length: 1500 mm

Input Voltage : 220 V
 Power : 24 W
 Socket : G13
 Qty in Box : 25 pcs



LED Rustic Bulbs


6W Rustic LED Bulb (A60)



Code
AA38-00620
CCT:3000K
Input Voltage : 220 V
Power : 6 W
Lumen : 600 lm
Socket : E27
Qty in Box : 100 pcs

RoHS Compliant | CE | ISO 9001

Rustic LED Bulb (C35)



Code	Power	Lumen
AA36-00410	4 W	440 lm
AA36-00610	6 W	660 lm
CCT:3000K		
Input Voltage : 220 V		
Socket : E14		
Qty in Box : 100 pcs		

RoHS Compliant | CE | ISO 9001

4W Rustic LED Bulb (G125)



Long Filament

Code
AB48-00420
CCT:2200K
Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs

RoHS Compliant | CE | ISO 9001


4W Rustic LED Bulb (G95)



Code
AB47-00420
CCT:2200K
Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 50 pcs

RoHS Compliant | CE | ISO 9001

Rustic LED Bulb (ST64)



Long Filament

Code	Power	Lumen
AB46-00420	4 W	350 lm
AB46-00620	6 W	525 lm
CCT:2200K		
Input Voltage : 220 V		
Socket : E27		
Qty in Box : 50 pcs		

RoHS Compliant | CE | ISO 9001

4W Rustic LED Bulb (G95)



Code
AB55-00420
CCT:2200K
Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs

RoHS Compliant | CE | ISO 9001

4W Rustic LED Pyramid Bulb



Long Filament

Code
AB53-00420
CCT:2200K
Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs

RoHS Compliant | CE | ISO 9001

4W Rustic LED Prismatic Bulb



Long Filament

Code
AB50-00420
CCT:2200K
Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs

RoHS Compliant | CE | ISO 9001

LED Rustic Bulbs

4W Rustic LED Bulb (G125)



Long Filament

Code

AB59-00420

CCT:2200K

Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs



4W Rustic LED Bulb (G125)



Long Filament

Code

AB58-00420

CCT:2200K

Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs



4W Rustic LED Bulb (G100)



Long Filament

Code

AB57-00420

CCT:2200K

Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs



3W Flame Effect LED Bulb



Code

AB63-00320

CCT: 1600K

Input Voltage : 220 V
Power : 3 W
Lumen : 111 lm
Socket : E27
Qty in Box : 100 pcs



Flame Mode (Up) Flame Mode (Down) Dusk to Dawn Full Brilliance

4W Rustic LED Bulb (G95)



Long Filament

Code

AB56-00420

CCT:2200K

Input Voltage : 220 V
Power : 4 W
Lumen : 350 lm
Socket : E27
Qty in Box : 20 pcs



6W Rustic LED Bulb (A165)



Code

AB60-00620

CCT: 2200K

Input Voltage : 220 V
Power : 6 W
Lumen : 550 lm
Socket : E27
Qty in Box : 8 pcs



Decorative LED Pendants

Decorative LED Pendant Lamp



ISO 9001

30,000 hr



Pendant Accessories are sold separately



24 W Decorative LED Pendant Lamp

Code	Body	CCT
AB01-02420	White	3000K
AB01-02423	White	6500K
AB01-12420	Black	3000K
AB01-12423	Black	6500K
AB01-42420	Red	3000K
AB01-52420	Green	3000K
AB01-52423	Green	6500K
AB01-62420	Blue	3000K

Input Voltage : 220 V
 Power : 24 W
 Lumen : 1920 lm
 Dimensions : 150 mm x 88 mm
 Qty in Box : 8 pcs

32 W Decorative LED Pendant Lamp

Code	Body	CCT
AB01-13220	Black	3000K
AB01-13223	Black	6500K
AB01-43220	Red	3000K
AB01-43223	Red	6500K
AB01-53220	Green	3000K
AB01-53223	Green	6500K
AB01-63220	Blue	3000K
AB01-63223	Blue	6500K

Input Voltage : 220 V
 Power : 32 W
 Lumen : 2560 lm
 Dimensions : 220 mm x 125 mm
 Qty in Box : 8 pcs

Decorative LED Pendant Accessories

Code	Body
AY45-00100	White
AY45-00101	Black
AY45-00200	Brown

Qty in Box : 100 pcs

Decorative LED Spotlights



Code	Cut.Dms.	CCT	Qty in Box
AH02-01603	65 mm	3000K	100 pcs



Code	Cut.Dms.	CCT	Qty in Box
AH02-00133	65 mm	6500K	100 pcs



Code	Cut.Dms.	CCT	Qty in Box
AH02-01006	65 mm	3000K	100 pcs



Code	Cut.Dms.	CCT	Qty in Box
AH02-01133	65 mm	6500K	100 pcs




Code	Cut.Dms.	CCT	Qty in Box
AH02-00233	65 mm	Chrome 6500K	50 pcs



Code	Cut.Dms.	CCT	Qty in Box
AH02-00206	65 mm	Gold 3000K	50 pcs



Code	Cut.Dms.	CCT	Qty in Box
AH02-00666	65 mm	Blue	50 pcs

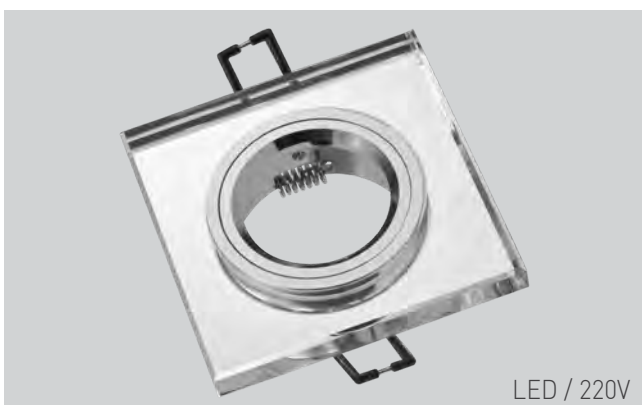

Code	Cut.Dms.	CCT	Qty in Box
AH02-00933	65 mm	6500K	50 pcs

Decorative LED Spotlights




3 W / 225 lm
220 V 50-60 Hz

Code	Cut.Dms.	CCT	Qty in Box
AH02-01733	65 mm	6500K	100 pcs



3 W / 225 lm
220 V 50-60 Hz

Code	Cut.Dms.	CCT	Qty in Box
AH02-01533	65 mm	6500K	100 pcs



LED / 220V

Code	Cut.Dms.	CCT	Qty in Box
AH02-00303	65 mm	3000K	50 pcs



LED / 220V

Code	Cut.Dms.	CCT	Qty in Box
AH02-00533	65 mm	6500K	50 pcs
AH02-00503	65 mm	3000K	50 pcs



3 W / 225 lm
220 V 50-60 Hz

Code	Cut.Dms.	CCT	Qty in Box
AH02-01233	65 mm	6500K	100 pcs



3 W / 225 lm
220 V 50-60 Hz

Code	Cut.Dms.	CCT	Qty in Box
AH02-01303	65 mm	3000K	100 pcs



3 W / 225 lm
220 V 50-60 Hz


Code	Cut.Dms.	CCT	Qty in Box
AH02-01333	65 mm	6500K	100 pcs



3 W / 225 lm
220 V 50-60 Hz


Code	Cut.Dms.	CCT	Qty in Box
AH02-01433	65 mm	6500K	100 pcs

Decorative Spotlights

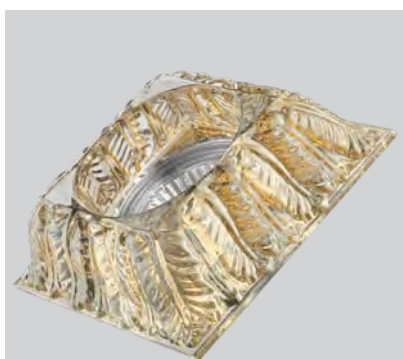

Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02123	65 mm

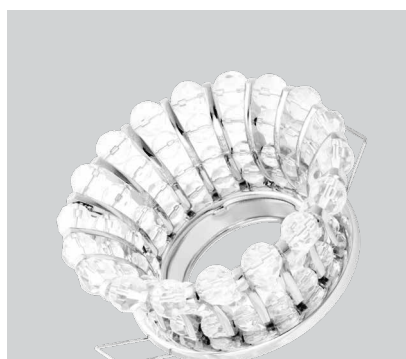

Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02104	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02044	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02046	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02054	65 mm




Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02056	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02076	65 mm

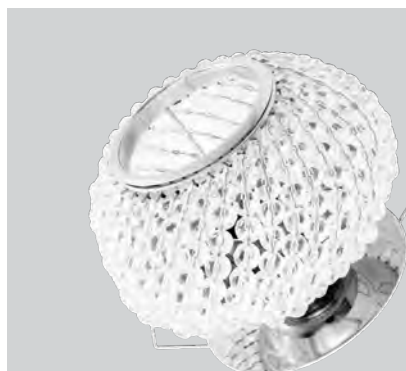

Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02084	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02094	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02096	65 mm



Qty in Box: 40 pcs


Code	Cut.Dms.
AH01-02133	65 mm



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02113	65 mm

Decorative Spotlights

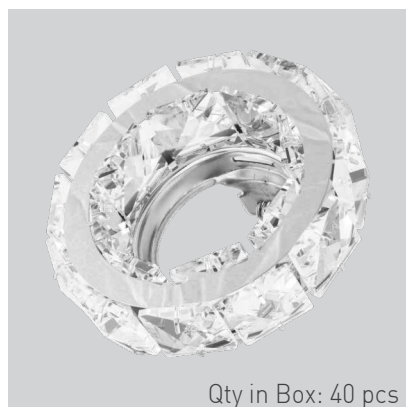

Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-02024	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH01-01123	55 mm



Qty in Box: 200 pcs

Code	Cut.Dms.
AH01-01113	55 mm




Qty in Box: 100 pcs

Code	Cut.Dms.
AH01-01053	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH01-01085	65 mm

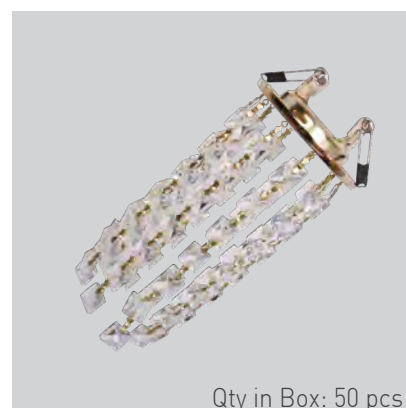

Qty in Box: 50 pcs

Code	Cut.Dms.
AH01-01076	50 mm



Qty in Box: 100 pcs

Code	Cut.Dms.
AH01-01065	55 mm



Socket: G4 Qty in Box: 30 pcs

Code	Cut.Dms.
1602-017	45 mm



Socket: G4 Qty in Box: 50 pcs

Code	Cut.Dms.
1602-023	45 mm



Qty in Box: 100 pcs

Code	Cut.Dms.
AH03-02034	50 mm



Socket: G4 Qty in Box: 30 pcs

Code	Cut.Dms.
1602-051	45 mm



Decorative Ceramic and Plaster Spotlights



Qty in Box: 40 pcs

Code	Cut.Dms.
AH01-04016	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01037	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01047	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04056	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04066	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04046	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04076	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04086	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04096	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH01-04106	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01016	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01026	65 mm

Decorative Ceramic and Plaster Spotlights



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01216	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01227	65 mm



Qty in Box: 20 pcs

Code	Cut.Dms.
AH04-01051	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01066	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01076	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01086	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01096	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01106	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01114	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01115	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01116	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01117	65 mm

Decorative Ceramic and Plaster Spotlights



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01126	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01135	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01136	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01137	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01146	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01156	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01160	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01161	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01165	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01166	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01177	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01179	65 mm

Decorative Ceramic and Plaster Spotlights



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01186	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01196	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01206	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01345	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01346	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01347	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01229	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01235	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01236	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01247	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01257	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01266	65 mm

Decorative Ceramic and Plaster Spotlights



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01276	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01280	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01285	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01286	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01296	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01306	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01316	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01326	65 mm



Qty in Box: 50 pcs

Code	Cut.Dms.
AH04-01336	65 mm



LED Strips, Bars and Drivers



LED Bars



Code	CCT
AS05-00100	3000K
AS05-00101	4000K
AS05-00103	6500K

Input Voltage 12 V
 Power : 18 W/mt
 Lumen : 125 lm/W
 Qty in Box : 50 pcs

OSRAMLED

Turkey
 Discover
 the potential

60 LED with One Chip



Indoor

Code	CCT	Input Voltage : DC 12 V
AS01-00103	6500K	Power : 4,8 W/mt
AS01-00104	Red	Lumen : 5 lm/W
AS01-00105	Green	Qty in Box : 250 mt

IP20

Outdoor

Code	CCT
AS01-00200	3000K



60 LED with Three Chip



Indoor

Code	CCT	Input Voltage : DC 12 V
AS01-00300	3000K	Power : 14,4 W/mt
AS01-00301	4000K	Lumen : 15 lm/W
AS01-00303	6500K	Qty in Box : 250 mt
AS01-00304	Red	
AS01-00305	Green	
AS01-00306	Blue	
AS01-00309	RGB	

IP20



High Lumen Strip LED



Code	CCT	Input Voltage: 12 V
AS01-00700	3000K	Power : 14,4 W/mt
AS01-00703	6500K	Lumen : 23 lm/W
		Qty in Box : 450 mt

IP20

IP68 Strip LED



One Chip

Code	CCT
5280-001	Blue
5280-002	White
5280-003	W.White
5280-004	Red
5280-005	Green

Three Chip

Code	CCT
5281-002	White
5281-005	Green

IP68

IP68 24 V StripLED



Three Chip

Code	CCT	Input Voltage: DC 24 V
AS01-00423	6500K	Qty in Box : 250 mt

IP68

220 V Strip LED



Three Chip

Code	CCT	Input Voltage: 220 V
AS01-00453	6500K	Qty in Box : 100 mt

IP54

220 V Strip LED




A05-95-005 220 V Strip LED Plug

Code	CCT
AS01-00500	3000K
AS01-00503	6500K
AS01-00504	Red
AS01-00505	Green
AS01-00506	Blue
AS01-00508	Amber

Input Voltage : 220 V
 Qty in Box : 50 mt/Roll
 Power : 6 W / mt
 120 LED/mt
 IP65

LED Neon Ropelights

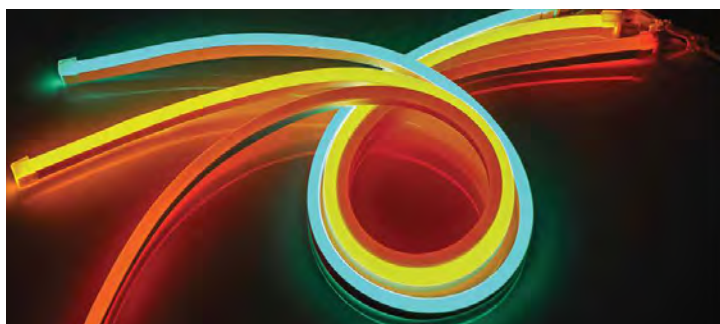

A05-95-006 Ropelight Plug

AY30-01020 Ropelight RGB Controller

Code	CCT
AS03-00500	3000K
AS03-00503	6500K
AS03-00504	Red
AS03-00505	Green
AS03-00506	Blue
AS03-00508	Amber
AS03-00509	RGB

Input Voltage : 220 V
 Qty in Box : 50 mt/Roll
 Power : 7,5 W / mt
 120 LED/mt
 IP65

Transparent Triple LED Modul

RoHS compliant | CE | IP65




Code	CCT
AS04-00200	3000K
AS04-00203	6500K
AS04-00204	Red
AS04-00205	Green
AS04-00206	Blue

Input Voltage DC 12 V
 Power : 1,5 W / 1 md.
 Lumen : 117 lm / 1 md.
 Qty in Box : 1000 pcs

Dimensions: 82 mm x 18 mm x 8,6 mm

Single LED Modul




Code	CCT
AS04-00300	3000K
AS04-00303	6500K
AS04-00304	Red
AS04-00305	Green
AS04-00306	Blue

Dim.: 43 mm x 23 mm x 7,8 mm

Input Voltage : DC 12 V
 Power : 1,32 W / 1 Pcs.
 Lumen : 125 lm / 1 Pcs.
 Qty in Box : 1000 pcs

RoHS compliant | CE | IP67

LED Modul with Lens



Code	CCT
AS04-00400	3000K
AS04-00403	6500K

Dim.: 51,4 mm x 32 mm x 14,8 mm


Input Voltage: DC 12 V
 Power : 2,5 W / 1 Pcs.
 Lumen : 250 lm / 1 Pcs.
 Qty in Box : 600 pcs

RoHS compliant | CE | IP67

2 Amper LED Driver

	Code
	AY02-00250
	
Dim.: 90 mm x 80 mm x 35 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 24 W
Amper	: 2 A
Qty in Box	: 80 pcs
  	

5 Amper Slim Type LED Driver

	Code
	AY02-00600
	
Dim.: 40 mm x 160 mm x 30 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 60 W
Amper	: 5 A
Qty in Box	: 50 pcs
  	

10 Amper Slim Type LED Driver

	Code
	AY02-01000
	
Dim.: 50 mm x 190 mm x 35 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 120 W
Amper	: 10 A
Qty in Box	: 50 pcs
  	

12,5 Amper Slim Type LED Driver

	Code
	AY02-01500
	
Dim.: 65 mm x 255 mm x 30 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 150 W
Amper	: 12,5 A
Qty in Box	: 40 pcs
  	

16,5 Amper Slim Type LED Driver

	Code
	AY02-02000
	
Dim.: 65 mm x 225 mm x 40 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 200 W
Amper	: 16,5 A
Qty in Box	: 30 pcs
  	

20 Amper Slim Type LED Driver

	Code
	AY02-02500
	
Dim.: 65 mm x 225 mm x 40 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 240 W
Amper	: 20 A
Qty in Box	: 30 pcs
  	

30 Amper Slim Type LED Driver

	Code
	AY02-03600
	
With Fan	
Dim.: 75 mm x 225 mm x 45 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 360 W
Amper	: 30 A
Qty in Box	: 25 pcs
  	

41 Amper Slim Type LED Driver

	Code
	AY02-05000
	
With Fan	
Dim.: 100 mm x 200 mm x 50 mm	
Input Voltage	: 220 V
Output Voltage	: 12V
Power	: 500 W
Amper	: 41 A
Qty in Box	: 28 pcs
  	

Ornamental Lights

Connectable X-Mass LED Light

Code	CCT
AS90-00400	3000K
AS90-00403	6500K
AS90-00404	Red
AS90-00405	Green
AS90-00406	Blue

Input Voltage:: 220 V
Qty in Box : 100 Pcs
Specifications: 10 m. 100 LED bulb.

Twinkle LED Lights with Modulator

Code	CCT
AS90-00700	3000K
AS90-00703	6500K
AS90-00706	Blue
AS90-00709	Mix

Input Voltage:: 220 V
Qty in Box : 60 Pcs
Specifications: 10 m. 100 LED

2X2 m LED Curtains

Code	CCT
AS90-00500	3000K
AS90-00503	6500K
AS90-00504	Red
AS90-00506	Blue

Input Voltage:: 220 V
Qty in Box : 10 Pcs
Specifications: 200 cm X 200 cm

Connectable X-Mass LED Light

Code	CCT
AS90-00100	3000K
AS90-00103	6500K
AS90-00104	Red
AS90-00105	Green
AS90-00106	Blue
AS90-00109	RGB

Input Voltage:: 220 V
Qty in Box : 20 Pcs
Specifications: 100 LED, 10 mt

LED Curtain Lights

Code	CCT
AS90-00600	3000K
AS90-00603	6500K
AS90-00604	Red
AS90-00606	Blue

Input Voltage:: 220 V
Qty in Box : 10 Pcs
Specifications: 200 cm X 200 cm

LED Curtains


Code	CCT
AS90-00300	3000K
AS90-00303	6500K
AS90-00304	Red
AS90-00306	Blue

Input Voltage:: 220 V
Qty in Box : 8 Pcs
Specifications: 200 cm X 200 cm

LED Fairy Lights

Code	CCT
AS90-00200	3000K
AS90-00203	6500K
AS90-00206	Blue

Input Voltage:: 220 V
Qty in Box : 16 Pcs
Specifications: 200 cm X 60/40/30 cm

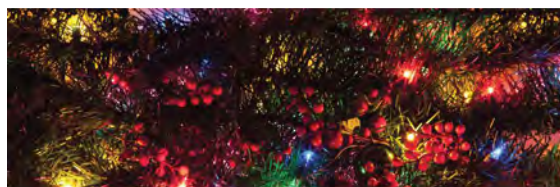

LED Neon Ropelights Accessories

Code	Description
T0595-006	Fuse
T0595-003	Additional Parts
T0595-004	L Parts
T0595-005	T Parts

Decorative Pendants

200 mm Decorative Pendant



Code	Body
AH15-01211	Black/Black
AH15-01271	Black/Gold
AH15-01200	White/White

Socket: E27

200 mm Decorative Pendant



Code	Body
AH15-02211	Black/Black
AH15-02271	Black/Gold

Socket: E27

300 mm Decorative Pendant



Code	Body
AH15-02311	Black/Black
AH15-02371	Black/Gold
AH15-02300	White/White

Socket: E27

400 mm Decorative Pendant



Code	Body
AH15-02411	Black/Black
AH15-02471	Black/Gold
AH15-02400	White/White

Socket: E27

300 mm Decorative Pendant



Code	Body
AH15-03311	Black/Black
AH15-03371	Black/Gold

Socket: E27

200 mm Decorative Pendant



Code	Body
AH15-04211	Black/Black
AH15-04271	Black/Gold

Socket: E27

400 mm Decorative Pendant



Code	Body
AH15-04411	Black/Black
AH15-04471	Black/Gold

Socket: E27

300 mm Decorative Pendant



Code	Body
AH15-05311	Black/Black
AH15-05371	Black/Gold

Socket: E27

Decorative Pendants

300 mm Decorative Pendant



Code	Body
AH15-06311	Black/Black
AH15-06371	Black/Black

Socket: E27

370 mm Decorative Pendant



Code	Body
AH15-07411	Black/Black
AH15-07471	Black/Gold

Socket: E27

320 mm Decorative Pendant



Code	Body
AH15-08311	Black/Black
AH15-08371	Black/Gold

Socket: E27

430 mm Decorative Pendant



Code	Body
AH15-08411	Black/Black
AH15-08471	Black/Gold

Socket: E27

300 mm Decorative Pendant



Code	Body
AH15-09311	Black/Black
AH15-09371	Black/Gold
AH15-09300	White/White

Socket: E27

400 mm Decorative Pendant



Code	Body
AH15-09411	Black/Black
AH15-09471	Black/Gold
AH15-09400	White/White

Socket: E27

600 mm Decorative Pendant



Code	Body
AH15-09611	Black/Black
AH15-09671	Black/Gold
AH15-09600	White/White

Socket: E27

300 mm Decorative Pendant



Code	Body
AH15-10311	Black/Black
AH15-10371	Black/Gold

Socket: E27

Decorative Pendants

300 mm Decorative Pendant



Code	Body
AH15-10411	Black/Black
AH15-10471	Black/Gold

Socket: E27

130 mm Decorative Pendant



Code	Body
AH15-11111	Black/Black
AH15-11171	Black/Gold

Socket: E27

170 mm Decorative Pendant



Code	Body
AH15-12111	Black/Black
AH15-12171	Black/Gold

Socket: E27

180 mm Decorative Pendant



Code	Body
AH15-13211	Black/Black
AH15-13271	Black/Gold

Socket: E27

100 mm Decorative Pendant



Code	Body
AH15-14111	Black/Black
AH15-14171	Black/Gold
AH15-14100	White/White

Socket: E27



Code	Socket	Body
AH16-01021	E27	Black



Code	Socket	Body
AH16-00221	E27	Black



Code	Socket	Body
AH16-00521	E27	Black



Code	Socket	Body
AH16-00121	E27	Black



Code	Socket	Body
AH16-00721	E27	Black



Code	Socket	Body
AH16-00821	E27	Black

Axial Fans



Aircol-100



Aircol-120



Aircol-150



Aircol-200



Aircol-100 (Chrome)



Aircol-120 (Chrome)



Aircol-150 (Chrome)



Aircol-200 (Chrome)



Aircol-100 OP



Aircol-120 OP



Aircol-150 OP



Aircol-100 MP



Aircol-120 MP



Aircol-150 MP



Aircol-100 SM



Aircol-120 SM

Fans with Cover



Aircol-20 K



Aircol-25 K



Aircol-150 K



Aircol-200 K

Axial CD Duct Fans



Aircol-100 KT



Aircol-120 KT



Aircol-150 KT

Ceiling Type Radial Fans



Aircol Spring



Aircol Spring Light



Aircol-250



Aircol 250F



Aircol Lux

Industrial Axial Fans




Aircol-200 MS
Aircol-250 MS
Aircol-300 MS



MS Square Series:
Aircol-200 MS
Aircol-250 MS
Aircol-300 MS



Aircol- S 300
Aircol- S 400
Aircol- S 450



S Square Series:
Aircol-S300
Aircol-S400
Aircol-S500

BCA Duct Type Radial Fans



Aircol-200 KF
Aircol-250 KF
Aircol-315 KF

2,5 inch - 10w Metal Downlight



Without Glass

Code	Socket	CCT
1201-001	G24	Chrome
1201-003	G24	Satin

220 V — IP20
   80 pcs  75mm

5 inch - 26w Metal Downlight



Without Glass

Code	Socket	CCT
1201-016	E27	Chrome
1201-017	E27	Satin

220 V — IP20
   40 pcs  145mm

6 inch - 1x18w Metal Downlight



Without Glass

Code	Socket	CCT
1201-019	G24	White

220 V — IP20
   24 pcs  165mm

6 inch - 2x18w Metal Downlight



Without Glass

Code	Socket	CCT
1201-021	G24	Chrome
1201-022	E27	Chrome
1201-023	G24	Satin
1201-024	E27	Satin
1201-025	G24	White
1201-026	E27	White

220 V — IP20
   24 pcs  165mm

8 inch - 2x26w Metal Downlight



Without Glass

Code	Socket	CCT
1201-027	G24	Chrome
1201-028	G24	Satin
1201-029	E27	White
1201-030	E27	White

220 V — IP20
   12 pcs  200mm

2,5 inch - 10w Metal Downlight



Code	Socket	CCT
1202-001	G24	Chrome
1202-003	G24	Satin
1202-005	G24	White
1202-002	E27	Chrome

220 V — IP20
   50 pcs  75mm

3 inch - 13w Metal Downlight



Code	Socket	CCT
1202-007	G24	Chrome

220 V — IP20
   50 pcs  90mm

1x13w Metal Downlight



Code	Socket	CCT
1203-001	E27	Satin
1203-002	E27	White

220 V — IP20
   50 pcs  100mm

Outlet

70w R/T Metal Downlight



Code	CCT
1204-001	Chrome
1204-002	Satin
1204-003	White

220 V — Rx7s — IP20
 RoHS Compliant | CE | 20 pcs | 135mm

150w R/T Metal Downlight



Code	CCT
1204-004	Chrome
1204-005	Satin

220 V — Rx7s — IP20
 RoHS Compliant | CE | 12 pcs | 200mm

150w R/T Gimbal Metal Downlight



Code	CCT
1208-001	Chrome

220 V — Rx7s — IP20
 RoHS Compliant | CE | 8 pcs | 215mm


1 x 18 w Power LED Floodlight



Code	CCT
5601-006	White
5601-007	Warm White

10 pcs
 220 V — **18W** — 1480 lm — IP65

8W COB LED Spotlight



Code	CCT
5004-013	White

Cutting Size: 90mm x 90mm
 30 pcs
 220 V — **8W** — 560 lm — IP20

4x8W COB LED Spotlight



Code	CCT
5004-015	White

Cutting Size: 170mm x 170mm
 8 pcs
 220 V — **32W** — 2240 lm — IP20

COB LED Downlight



CCT: 6500K

Code	Power	Cut.Size	Body
5003-016	8W	110mm	Satin
5003-023	8W	110mm	White
5003-012	30W	205mm	Satin

220 V | 20 pcs | IP20

Garden Aplique



Code
AG31-00104

10 pcs
 220 V — **max. 60 W** — E27 — IP44

